

Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures
Job Location: Bowling Green, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: S. Felletter

8/11/2026 9:22:07 AM

PC: M. Sullivan



Structure ID: DBI-16

P3 BX036048-08LD08S

CB FLAT TOP 8"W w/24"x30" HOLE F/F

P4) 24" x 30" - CASTING HEIGHT - 3.50"
P3) 36" x 48" - CB FLAT TOP 8"W w/24"x30" HOLE F/F - 8"
P2) 36" x 48" - BOX RISER 8inW F/G - 48"
P1) 36" x 48" - BOX BASE 8inW, 8inF T/n - 60"
1) CASTING - HOE KY-460-11 F/G (DBI 11)
2) 36" x 48" - Conseal CS-102 1.00"
1) 24" x 30" - Conseal CS-102 1.00"
1) Hole - 50
1) Hole - 44
5) MH Step ML-10-TDS-NCR - 10"

0 lb
1751 lb
6444 lb
8280 lb
421 lb
0 lb
0 lb
0 lb
0 lb
0 lb
Structure Total: 16896 lb

Structure Notes:


1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE KY-460-11 F/G).

REINFORCING PER ASTM A615 (GRADE 60).


- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-931 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C.E.W. (GRADE 60).

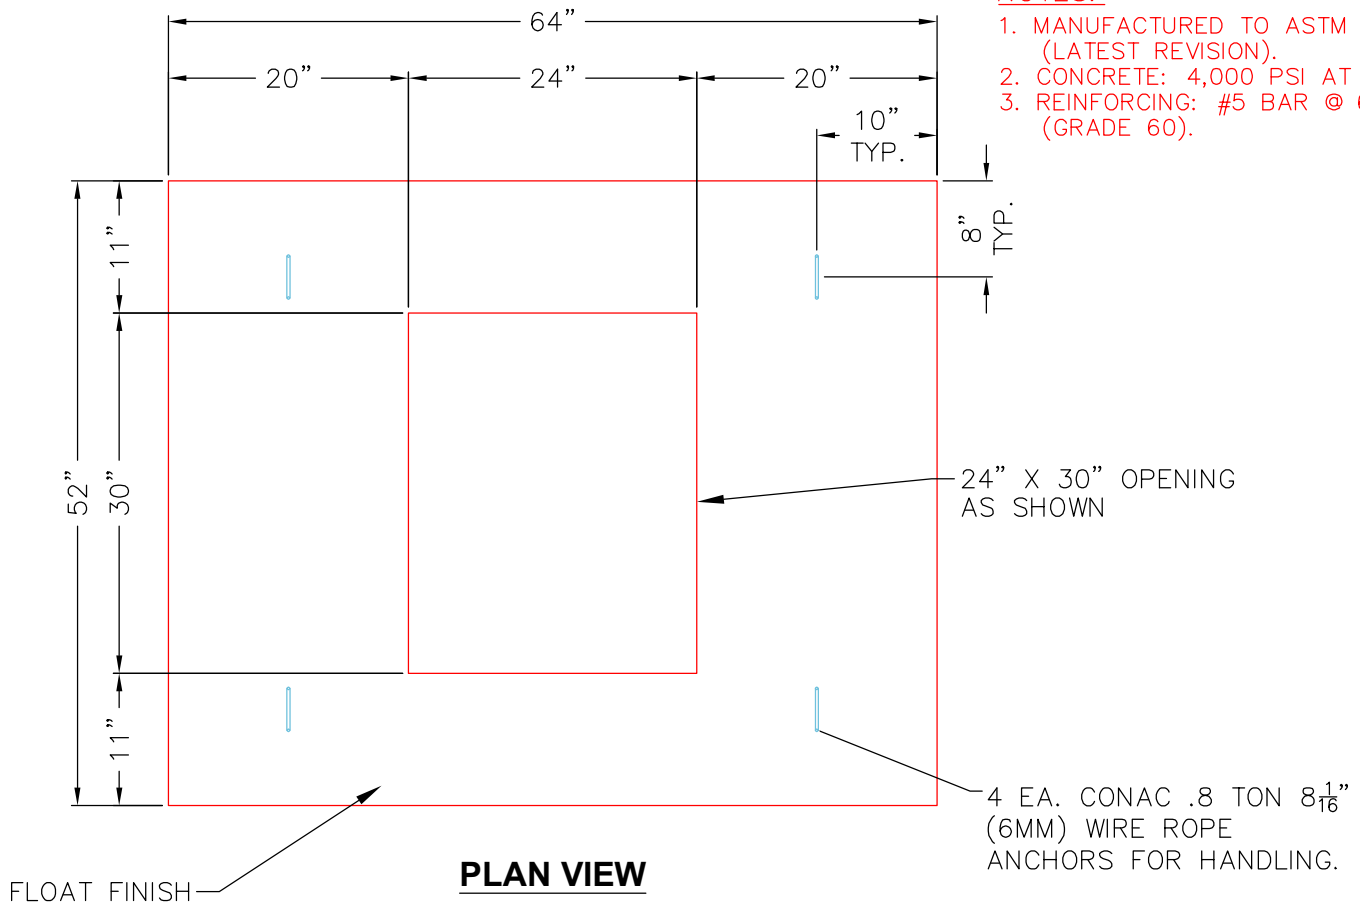

PLAN VIEW

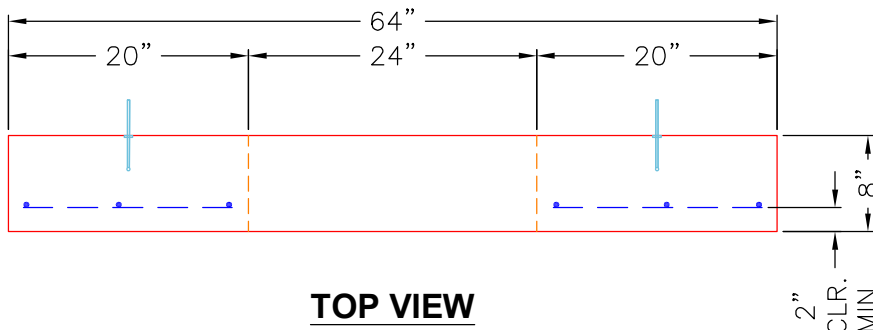

TOP VIEW

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1751 lb
Volume (Net): 0.45cu.yd