

Job Name: 26-1066 - Gunning Pump Station & Force Main
Job Location: Bardstown, KY
Contractor: Connhurst, LLC

Plant: 100

6/2/2026 10:56:12 AM

Tech: Jared - F
PC: E. Bradley



Structure ID: A6 (10)

P2 MH048LD12ECC

MH FLAT TOP w/ 24" ECC Hole F/G



- P3) 24" - CASTING HEIGHT - 7"
P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12"
P1) 48" - MH BASE Custom Ht T/n - 26"
1) 48" - MH INVERT CHANNEL - FULL HEIGHT
1) JOINT WRAP - 12" WD x 048" MAC WRAP
1) 48" - Con Seal CS-102 1.00" (Double)
2) PSX - 16M DD

Structure Total: 5992 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS.
4. CASTING SUPPLIED BY OTHERS.
5. ALL PIPE CONNECTORS TO INCLUDE DOUBLE PIPE BANDS.

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB = H20 LOADING.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

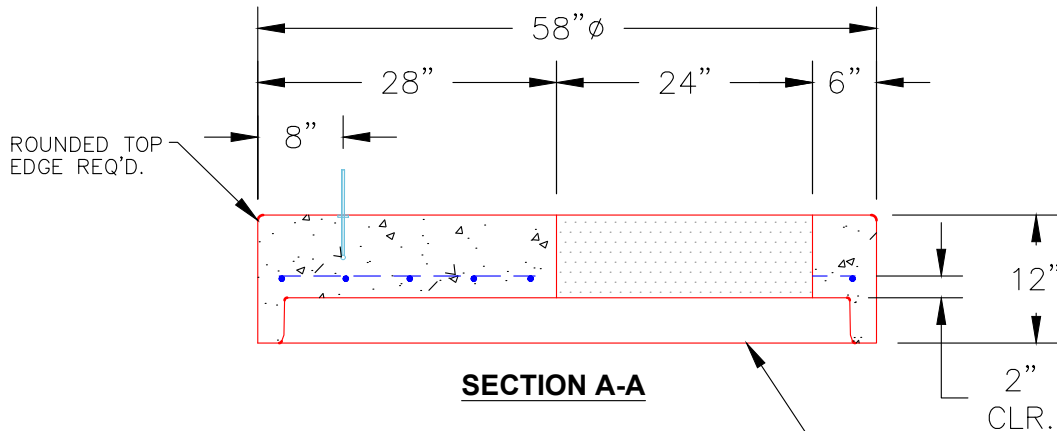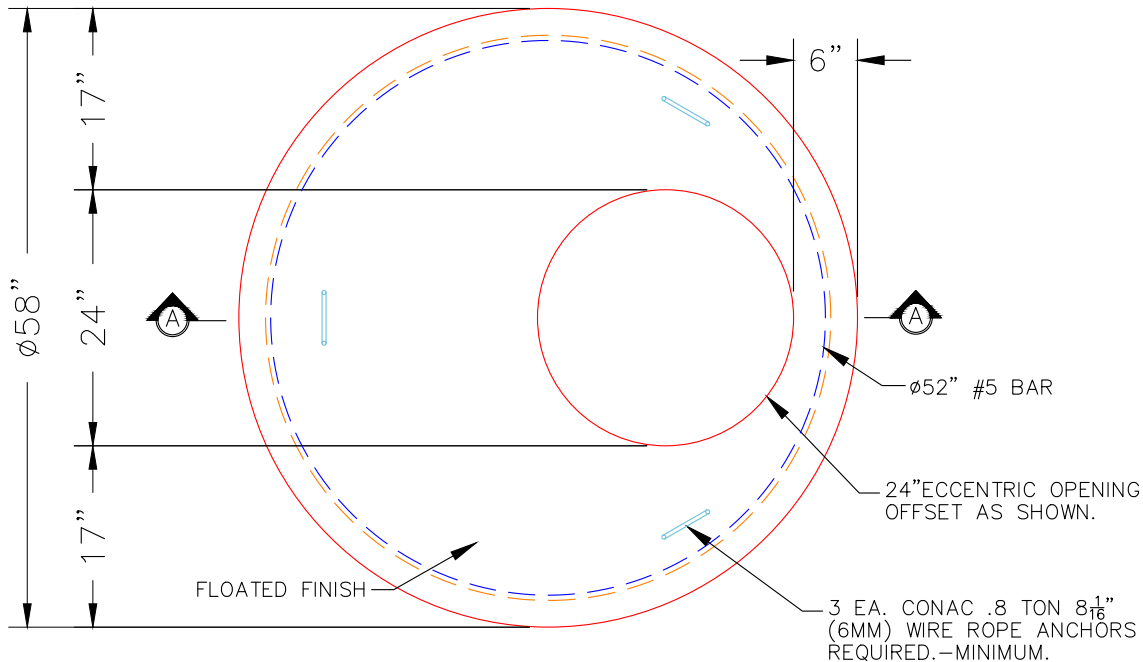

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1561 lb
Volume (Net): 0.42cu.yd