

Job Name: 26-3266 903262 Enterprise Leasing Hazelwood
Job Location: Hazelwood, MO
Contractor: Contech Engineering Solutions

Plant: Beaver Dam
8/17/2026 4:04:46 PM

Tech: S. Felletter
PC: C. Goff



Structure ID: 10-CS-5

P2 MH060RS72

MH RISER T/G

P4) 30" - CASTING HEIGHT - 4"
P3) 60" - MH FLAT TOP SPEC. (30" ECC HOLE) F/G - 13"
P2) 60" - MH RISER T/G - 72"
P1) 60" - MH BASE T/n - 18"
1) ASSEMBLY REQUIRED
1) CVSTENCILING
2) 60" - Conseal CS-102 1.00"
2) PSX - 20Y DD

Structure Notes:
4" CASTING BY OTHERS
LIFTING ANCHORS TO BE INSTALLED
ON THE OUTSIDE OF THE STRUCTURE
ICAST TO INSTALL THE INTERNALS
CONTECH'S LOGO AS WELL AS THE
INLET AND OUTLET MUST BE
STENCILED ONTO THE STRUCTURE



Structure Total:

14404 lb


Rim: 529.28' Rim to Invert: 4.68' Slack: 10.156" Sump: 60.996" Step Position: 0°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	524.6'	270°	169.646"	12" RCP B WALL	16"	PSX 20Y DD	20"	20.39"	34.246"	0"
Invert 2	524.6'	215°	125.992"	12" RCP B WALL	16"	PSX 20Y DD	20"	21.576"	34.246"	-9"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

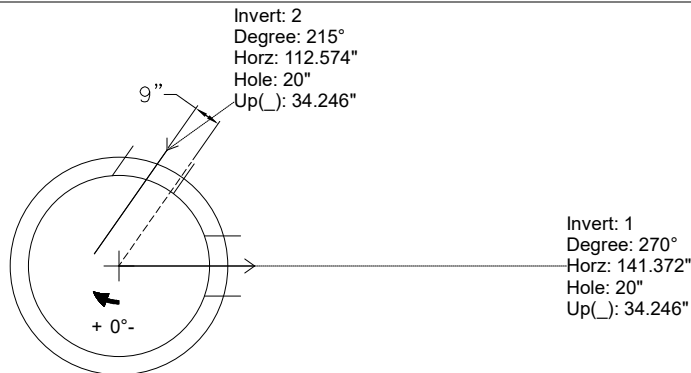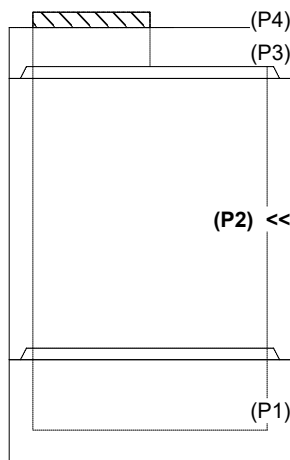

INSIDE WALL DIMENSIONS

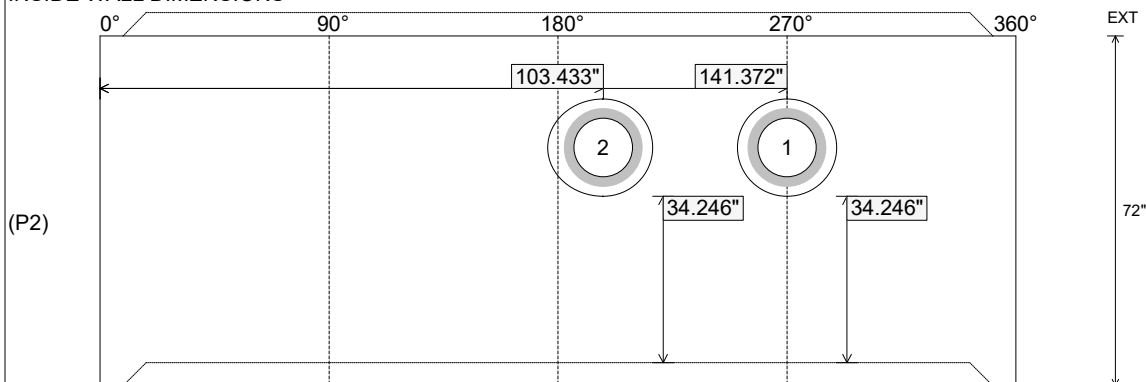

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 72" Height (Ext): 72"	Weight (Net): 7187 lb Volume (Net): 1.84cu.yd
----------------------------------	------------------------------------	--	--	--