




Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/12/2026 3:09:56 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 60											
P1 BX24300808VF BOX BASE 8inW, 8inF, Variable Ht T/n											
P4) 15" x 27" - P.I.P. - BY OTHERS - 8" P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8" P2) 24" x 30" - BOX RISER 8inW F/G - 18" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht T/n - 38" 2) 24" x 30" - Conseal CS-102 1.00" 1) 15" x 27" - Conseal CS-102 1.00" 2) Hole - 24 1) Hole - 20 2) Hole - 4						0 lb 963 lb 1675 lb 4140 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 6778 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC DBI TYPE 13G / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE KY-230G FRAME & GRATE SUPPLIED BY OTHERS - POURED IN PLACE BY OTHERS			
Rim: 551.92' Rim to Invert: 6.08' Slack: 0.96" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	545.84'	0°	20"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"	
Invert 2	545.84'	90°	23"	15" HDPE	17.6"	Hole 20	20"	20"	-2.5"	0"	
Invert 3	545.84'	180°	20"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

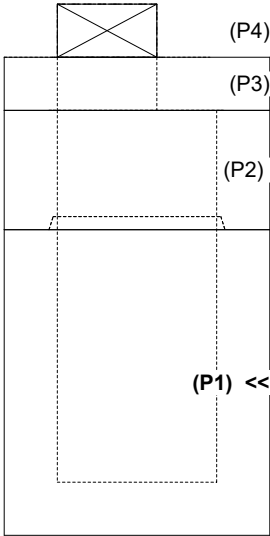

UPSIDE-DOWN VIEW (int. dimensions)

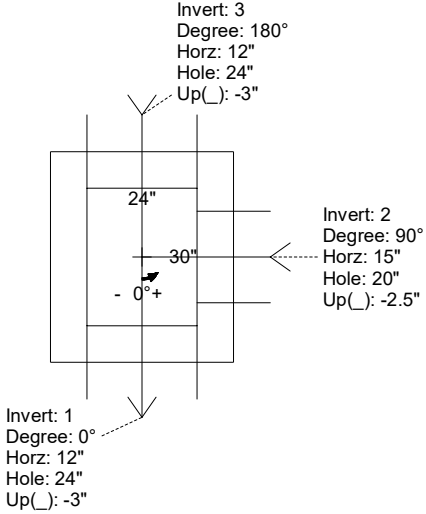

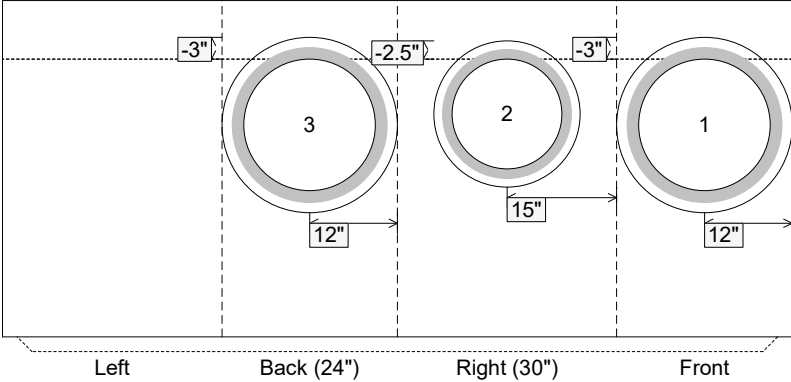INSIDE WALL DIMENSIONS				
				
Left Back (24") Right (30") Front				

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 38" Height (Ext): 46"	Weight (Net): 4140 lb Volume (Net): 1.06cu.yd
----------------------------------	---------------------------------	--	--	--