

Job Name: 26-2078 Lincoln & Coleman Street Sewer
Job Location: Lawrenceburg, KY
Contractor: Shouse Excavating

Plant: Beaver Dam

Tech: S. Felletter

5/14/2026 1:16:19 PM

PC: C. Goff



Structure ID: A1 SS-MH

P2 MH048LD06SP

MH FLAT TOP SPEC. HT. (6") w/24" ECC Hole F/F

P3) 24" - CASTING HEIGHT - 4"
P2) 48" - MH FLAT TOP SPEC. HT. (6") w/24" ECC Hole F/F - 6"
P1) 48" - MH BASE Custom Ht F/n - 17"
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) 48" - MH INVERT CHANNEL - FULL HEIGHT
1) CASTING - HOE MC-285 F/C Sanitary
1) 48" - Conseal CS-102 1.00" (Double)
2) PSX - 12-08 NYLO
1) MH Step ML-10-TDS-NCR - 10"

0 lb
1102 lb
2422 lb
0 lb
0 lb
1440 lb
284 lb
0 lb
16 lb
0 lb

Structure Total: 5264 lb

Structure Notes:


1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MCS-285 "SAN" F/C).

REINFORCING PER ASTM A615 (GRADE 60).


- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).

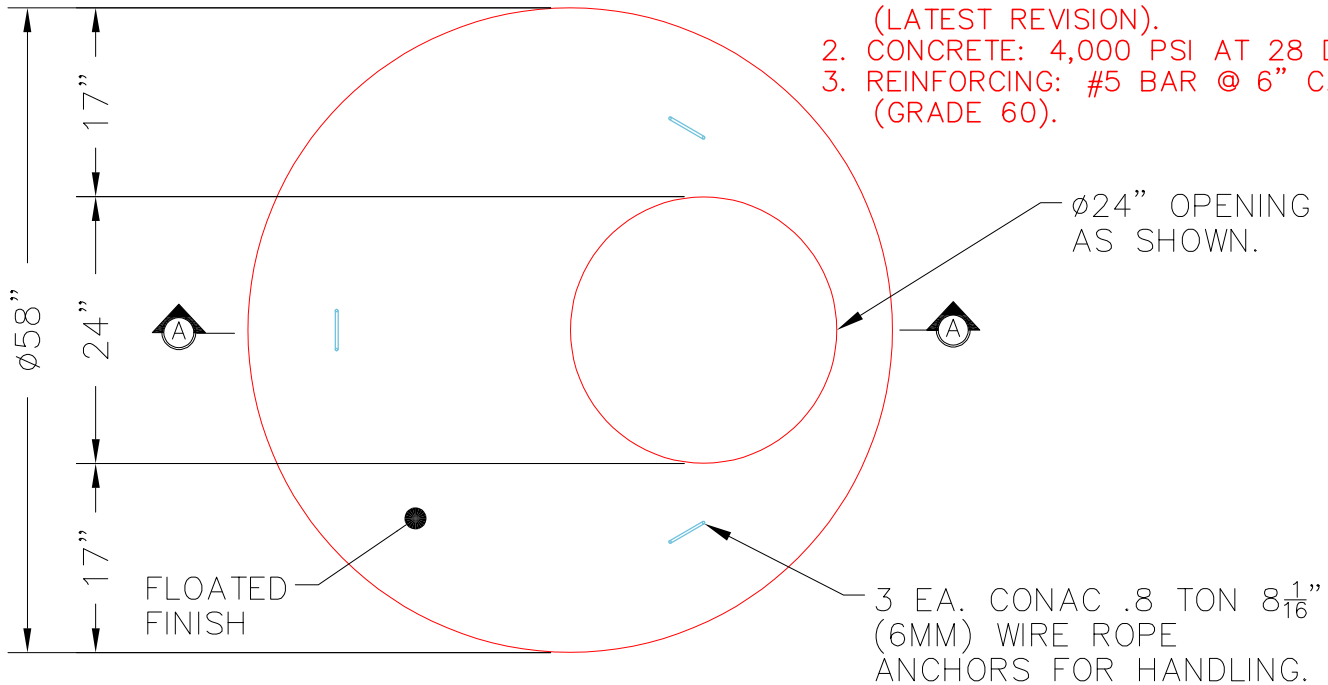

PLAN VIEW

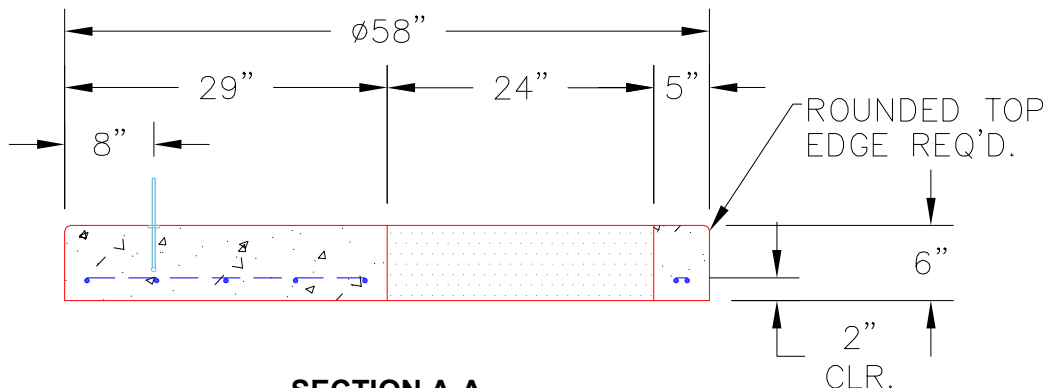

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 5"

Height (Ext): 6"

Weight (Net): 1102 lb
Volume (Net): 0.28cu.yd