

Structure ID: SCI-467.39

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht F/n

- P2) 24" x 36" - CASTING HEIGHT - 6"
- P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 36"
- 1) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 12
- 1) Hole - 16

0 lb
 4833 lb
 0 lb
 0 lb
 0 lb

 0 lb
 Structure Total: 4833 lb




- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STORM INVERT
 5. NO STEPS
 6. CASTING: HOE 525 FRAME, GRATE, & CURB HOOD BY ICAST

Rim: 470.93' Rim to Invert: 3.54' Slack: 1.73" Sump: 1.25" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	467.39'	110°	29.023"	8" HDPE	9.1"	Hole 12	12"	12.77"	0.7"	-4"
Invert 2	467.39'	330°	15.381"	12" HDPE	14.5"	Hole 16	16"	18.475"	0"	9"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

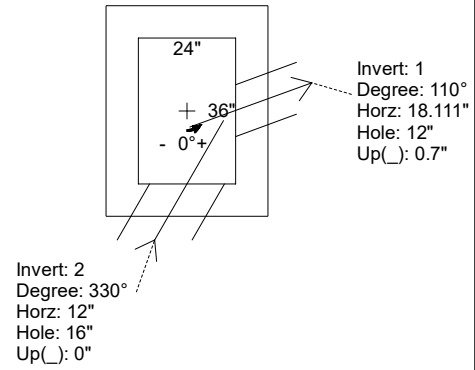

INSIDE WALL DIMENSIONS

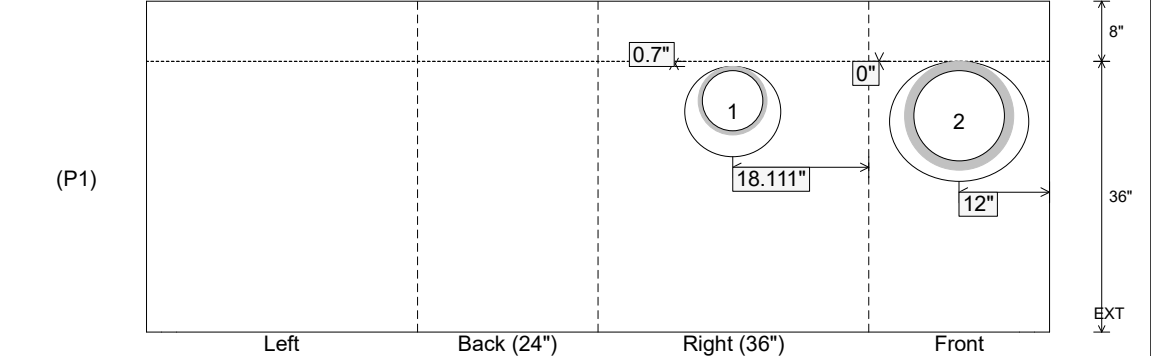

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 36" Height (Ext): 44"	Weight (Net): 4833 lb Volume (Net): 1.23cu.yd
----------------------------------	-------------------------------	--	--	--