



Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements Job Location: Louisville, KY 40208 Contractor: Louisville Paving and Construction					Plant: 100 4/30/2026 1:22:31 PM		Tech: Jared - F PC: J. Jarvis						
Structure ID: S115													
P2 MH048RS48S				MH RISER T/G									
P4) 32" x 32" - CASTING HEIGHT - 3" P3) 48" - MH FLAT TOP w/32"x32" Hole F/G - 12" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE Custom Ht T/n - 40" 1) CASTING - HOE 595 F/G 2) 48" - Conseal CS-102 1.00" 1) 32" x 32" - Conseal CS-102 1.00" 1) Hole - 30 1) Hole - 16 1) Hole - 24						0 lb 1629 lb 3267 lb 3611 lb 376 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8884 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 595 F/G) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 454.25' Rim to Invert: 8.61' Slack: 0.32" Sump: 0" Step Position:													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset			
Invert 1													
Invert 2	450.92'	101°	51.125"	12" HDPE	14.5"	Hole 16	16"	16.312"	17.875"	0"			
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													

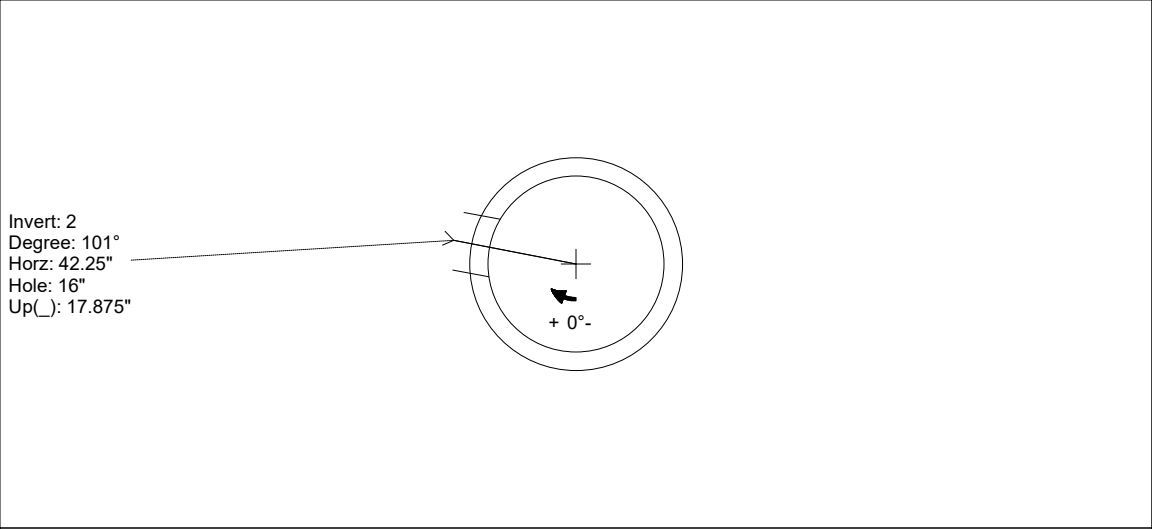

INSIDE WALL DIMENSIONS

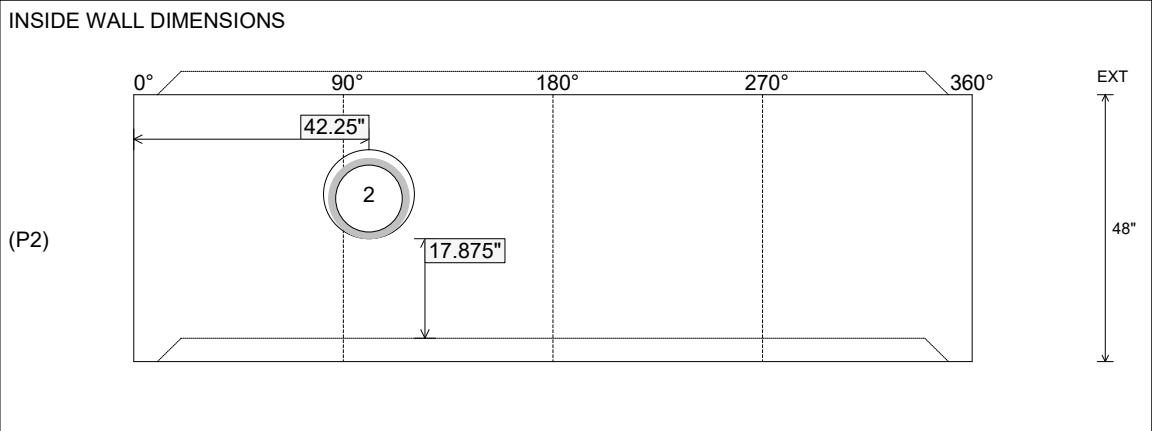

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 3267 lb Volume (Net): 0.84cu.yd
----------------------------------	------------------------------------	--	--	--