

Job Name: 25-1431 - Georgetown Commons
 Job Location: Georgetown, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

Tech: J. Coppage

4/23/2026 11:20:17 AM

PC: A. Chambers



Structure ID: CBI 116

P1 BX6060-08BAVF

BOX BASE 8inW, 8inF, Variable Ht

- P5) 24" x 60" - CB INLET KY A 5' TOP RIGHT - 10"
- P4) 24" x 60" - CB INLET KY A 5' BOTTOM RIGHT - 18"
- P3) 24" x 36" - BOX RISER 8inW, Variable Ht - 23"
- P2) 60" x 60" - CB FT REDUCER 24"X36" HOLE - 8"
- P1) 60" x 60" - BOX BASE 8inW, 8inF, Variable Ht - 84"
- 1) SECONDARY POUR - WALLS
- 1) 60" x 60" - Conseal CS-102 1.00"
- 2) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 50
- 1) Hole - 46
- 1) Hole - 24
- 1) Hole - 6

- 1895 lb
- 2670 lb
- 2328 lb
- 3297 lb
- 16460 lb
- 0 lb
- 0 lb
- 0 lb
- 0 lb
- 0 lb
- 0 lb
- 0 lb
- 0 lb
- 0 lb

Structure Notes:

1. JR HOE KY-206 PROVIDED BY ICAST.
2. CASTING FRAME TO BE CAST INTO THE TOP PHASE.
3. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
4. CONCRETE = 4,000 PI AT 28 DAYS.
5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 26651 lb



FIRST POUR DRAWING

Rim: 871.98' Rim to Invert: 11.58' Slack: 0.256" Sump: 4.296" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	860.4'	0°	38"	42" HDPE	47.7"	Hole 50	50"	50"	-0.000"	0"
Invert 2	860.4'	90°	38"	36" HDPE	41.7"	Hole 46	46"	46"	-0.700"	0"
Invert 3	864.5'	161°	37.607"	18" HDPE	21.2"	Hole 24	24"	25.383"	50.496"	12"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)


UPSIDE-DOWN VIEW (int. dimensions)

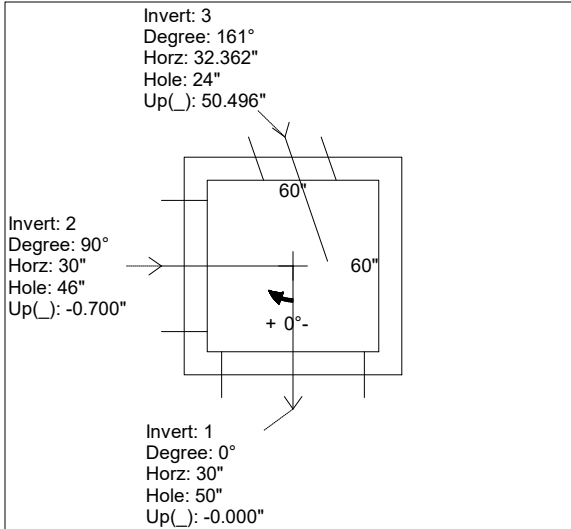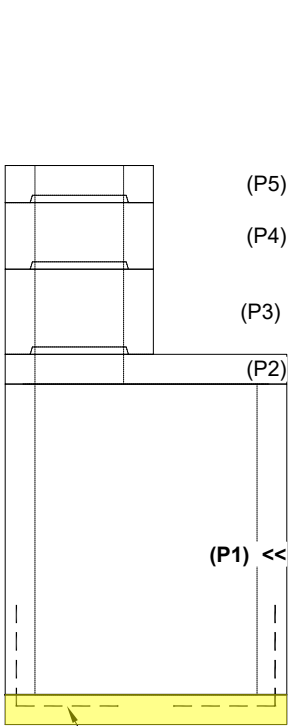

WEIGHTS:

FIRST POUR - 3,877 LBS.
SECOND POUR - 12,583 LBS.
TOTAL - 16,460 LBS.

INSIDE WALL DIMENSIONS

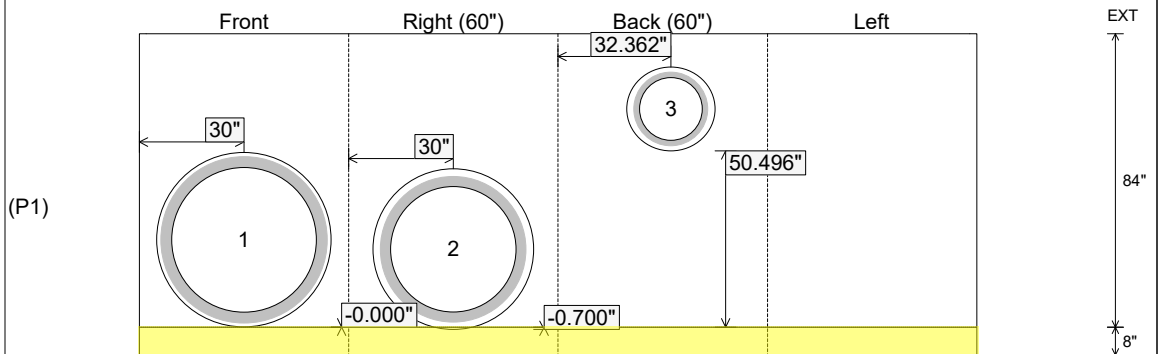

36" X 36" #5 BAR "L"
 @ 12" ON CENTER
 TIED INTO THE MAT

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 84"
 Height (Ext): 92"

Weight (Net): 16460 lb
 Volume (Net): 4.2cu.yd

Job Name: 25-1431 - Georgetown Commons
 Job Location: Georgetown, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

4/23/2026 11:20:17 AM

Tech: J. Coppage

PC: A. Chambers



Structure ID: CBI 116

P1 BX6060-08BAVF

BOX BASE 8inW, 8inF, Variable Ht

- P5) 24" x 60" - CB INLET KY A 5' TOP RIGHT - 10"
- P4) 24" x 60" - CB INLET KY A 5' BOTTOM RIGHT - 18"
- P3) 24" x 36" - BOX RISER 8inW, Variable Ht - 23"
- P2) 60" x 60" - CB FT REDUCER 24"X36" HOLE - 8"
- P1) 60" x 60" - BOX BASE 8inW, 8inF, Variable Ht - 84"
- 1) SECONDARY POUR - WALLS
- 1) 60" x 60" - Conseal CS-102 1.00"
- 2) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 50
- 1) Hole - 46
- 1) Hole - 24
- 1) Hole - 6

1895 lb
 2670 lb
 2328 lb
 3297 lb
 16460 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 26651 lb

Structure Notes:

1. JR HOE KY-206 PROVIDED BY ICAST.
2. CASTING FRAME TO BE CAST INTO THE TOP PHASE.
3. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
4. CONCRETE = 4,000 PI AT 28 DAYS.
5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.



SECOND POUR DRAWING

Rim: 871.98' Rim to Invert: 11.58' Slack: 0.256" Sump: 4.296" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	860.4'	0°	38"	42" HDPE	47.7"	Hole 50	50"	50"	-0.000"	0"
Invert 2	860.4'	90°	38"	36" HDPE	41.7"	Hole 46	46"	46"	-0.700"	0"
Invert 3	864.5'	161°	37.607"	18" HDPE	21.2"	Hole 24	24"	25.383"	50.496"	12"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

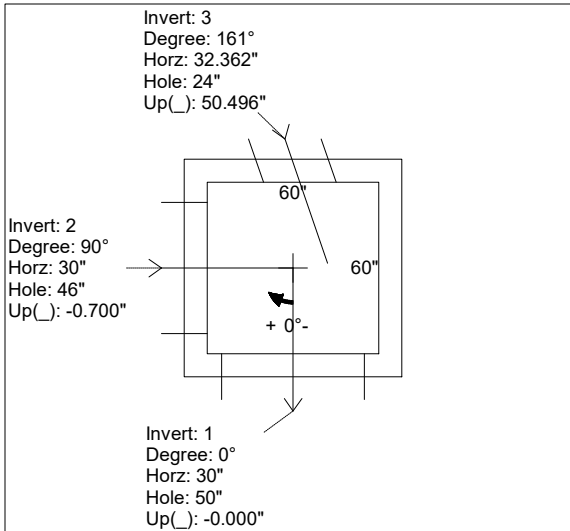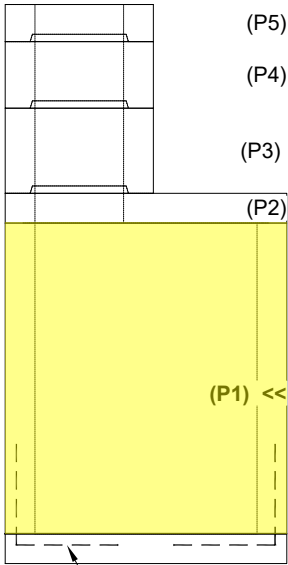

WEIGHTS:
FIRST POUR - 3,877 LBS.
SECOND POUR - 12,583 LBS.
TOTAL - 16,460 LBS.

INSIDE WALL DIMENSIONS

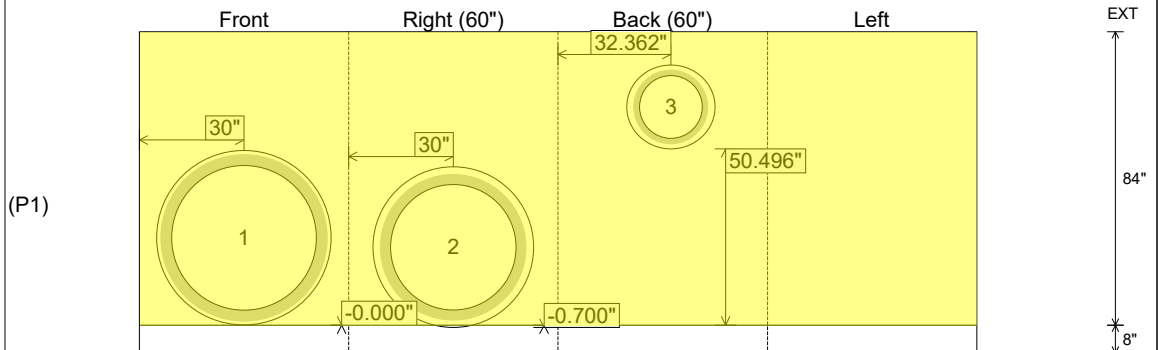

36" X 36" #5 BAR "L"
 @ 12" ON CENTER
 TIED INTO THE MAT

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 84"
 Height (Ext): 92"

Weight (Net): 16460 lb
 Volume (Net): 4.2cu.yd