

Job Name: 25-1431 - Georgetown Commons
 Job Location: Georgetown, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

4/23/2026 11:20:22 AM

Tech: J. Coppage

PC: A. Chambers



Structure ID: CBI 133

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht

- P4) 24" x 60" - CB INLET KY A 5' TOP RIGHT - 10"
- P3) 24" x 60" - CB INLET KY A 5' BOTTOM RIGHT - 18"
- P2) 24" x 36" - BOX RISER 8inW, Variable Ht - 43"
- P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 32"
- 2) 24" x 36" - Conseal CS-102 1.00"
- 3) Hole - 20
- 1) Hole - 6

- Structure Notes:**
1. JR HOE KY-206 PROVIDED BY ICAST.
 2. CASTING FRAME TO BE CAST INTO THE TOP PHASE.
 3. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
 4. CONCRETE = 4,000 PI AT 28 DAYS.
 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.



Structure Total: 12962 lb

Rim: 876.46' Rim to Invert: 8.46' Slack: 1.02" Sump: 2.5" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	868'	0°	20"	15" HDPE	17.6"	Hole 20	20"	20"	0"	0"
Invert 2										
Invert 3	868'	180°	20"	15" HDPE	17.6"	Hole 20	20"	20"	0"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

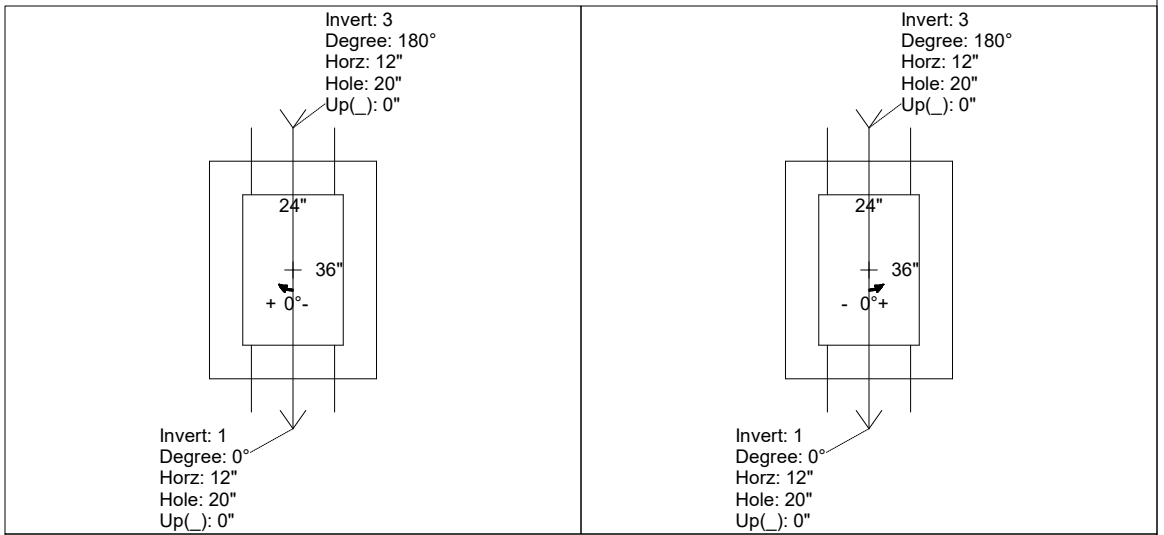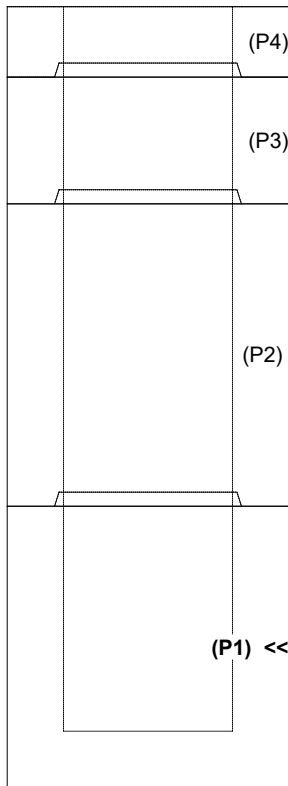

INSIDE WALL DIMENSIONS

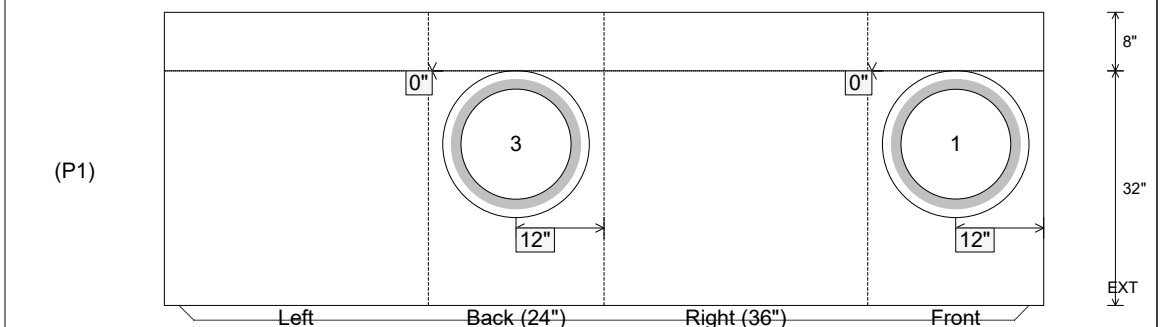

Coating (Int):
 Coating (Ext):

Seam Up: Tongue
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 32"
 Height (Ext): 40"

Weight (Net): 4240 lb
 Volume (Net): 1.08cu.yd