

Job Name: 25-1431 - Georgetown Commons
 Job Location: Georgetown, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

4/23/2026 11:20:23 AM

Tech: J. Coppage

PC: A. Chambers



Structure ID: CBI 134

P1 BX2436-08BA36

BOX BASE 8inW, 8inF

- P4) 24" x 60" - CB INLET KY A 5' TOP RIGHT - 10"
- P3) 24" x 60" - CB INLET KY A 5' BOTTOM RIGHT - 18"
- P2) 24" x 36" - BOX RISER 8inW, Variable Ht - 37"
- P1) 24" x 36" - BOX BASE 8inW, 8inF - 36"
- 2) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 24
- 2) Hole - 20
- 1) Hole - 6

- 1895 lb
 2670 lb
 3545 lb
 4605 lb
 0 lb
 0 lb
 0 lb
 0 lb




 Structure Total: 12716 lb
- Structure Notes:**
1. JR HOE KY-206 PROVIDED BY ICAST.
 2. CASTING FRAME TO BE CAST INTO THE TOP PHASE.
 3. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
 4. CONCRETE = 4,000 PI AT 28 DAYS.
 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 873.48' Rim to Invert: 8.23' Slack: 0.76" Sump: 3" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (")	Offset
Invert 1	865.25'	0°	20"	18" HDPE	21.2"	Hole 24	24"	24"	0"	0"
Invert 2										
Invert 3	865.25'	153°	15.731"	15" HDPE	17.6"	Hole 20	20"	22.447"	0.5"	8"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

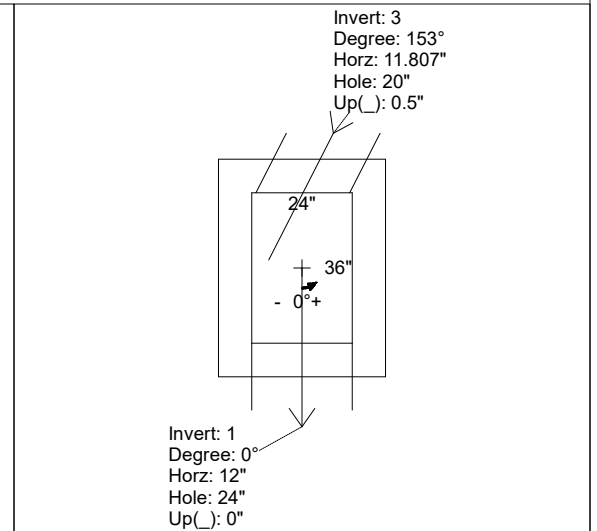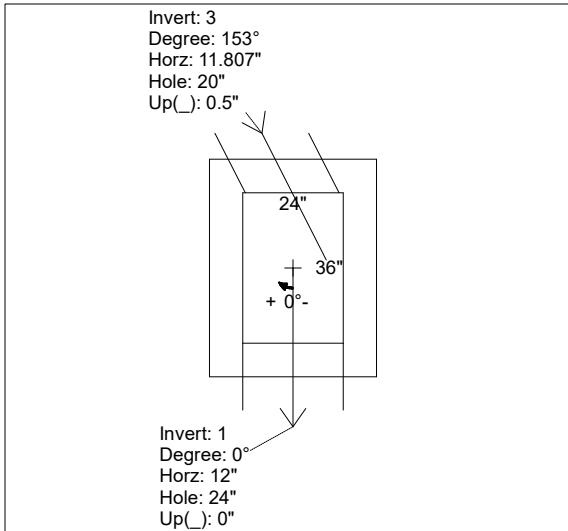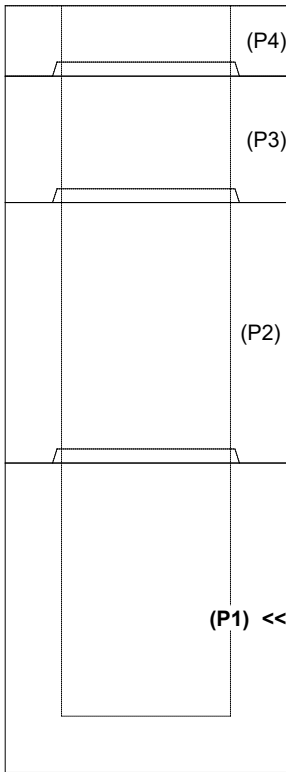

INSIDE WALL DIMENSIONS

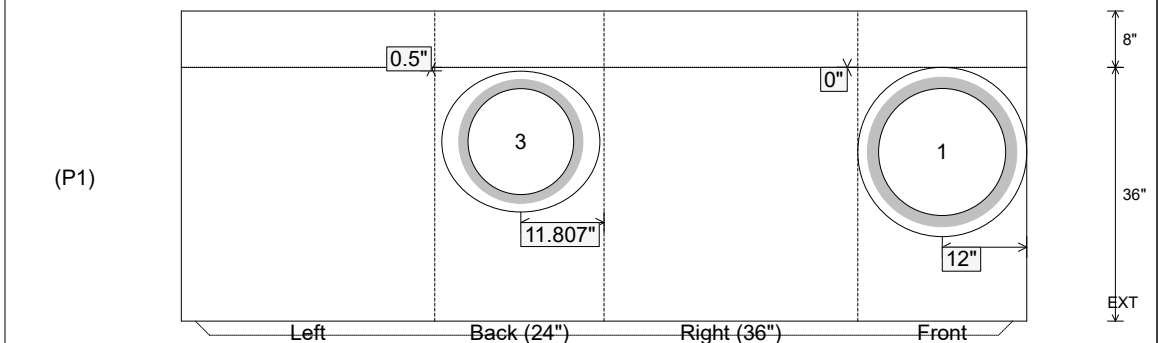

Coating (Int):
 Coating (Ext):

Seam Up: Tongue
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 36"
 Height (Ext): 44"

Weight (Net): 4605 lb
 Volume (Net): 1.18cu.yd