

Job Name: 25-1431 - Georgetown Commons
 Job Location: Georgetown, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

Tech: J. Coppage

4/23/2026 11:20:39 AM

PC: A. Chambers



Structure ID: CBI 213

P1 BX3648-08BA60

BOX BASE 8inW, 8inF

- P5) 24" x 120" - CB INLET KY A 10' TOP LEFT - 10"
- P4) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT - 18"
- P3) 36" x 48" - CB FT REDUCER 24"X36" HOLE - 8"
- P2) 36" x 48" - BOX RISER 8inW, Variable Ht - 47"
- P1) 36" x 48" - BOX BASE 8inW, 8inF - 60"
- 2) 36" x 48" - Conseal CS-102 1.00"
- 1) 24" x 36" - Conseal CS-102 1.00"
- 2) Hole - 40
- 1) Hole - 6

- Structure Notes:
1. JR HOE KY-206 PROVIDED BY ICAST.
 2. CASTING FRAME TO BE CAST INTO THE TOP PHASE.
 3. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
 4. CONCRETE = 4,000 PI AT 28 DAYS.
 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.



Structure Total: 25217 lb

Rim: 872.83' Rim to Invert: 11.58' Slack: 0.96" Sump: 5" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	861.25'	90°	32"	30" HDPE	35.1"	Hole 40	40"	40"	0"	0"
Invert 2	864'	270°	32"	30" HDPE	35.1"	Hole 40	40"	40"	33"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

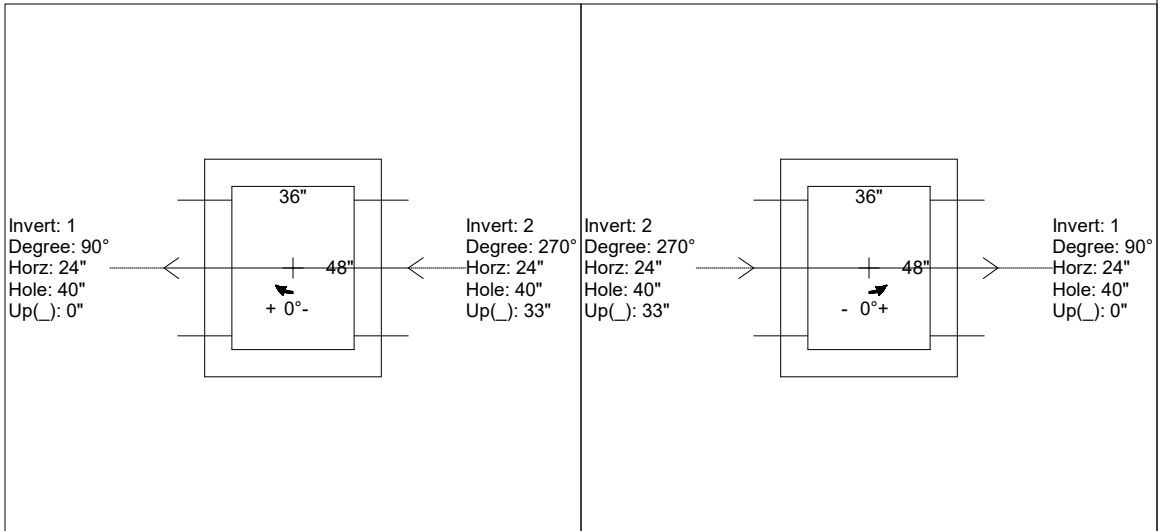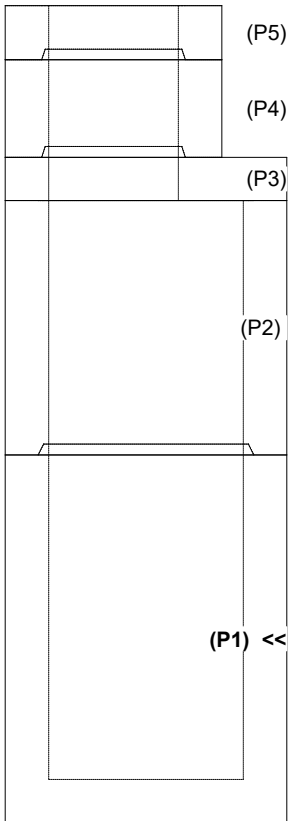

INSIDE WALL DIMENSIONS

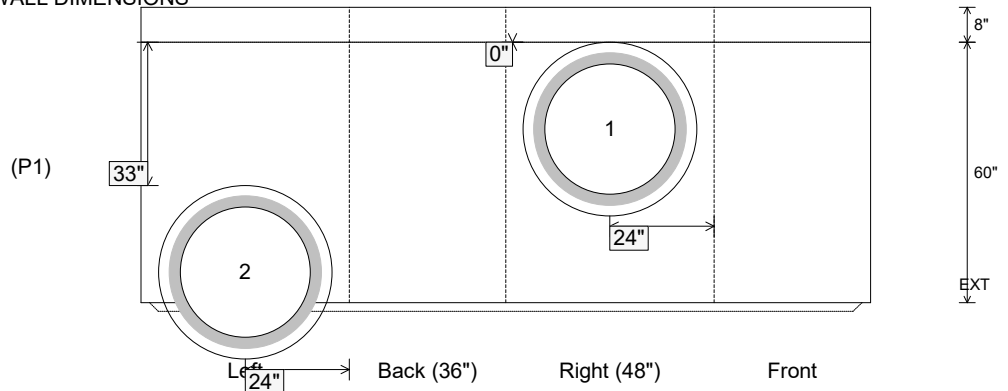

Coating (Int):
 Coating (Ext):

Seam Up: Tongue
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 60"
 Height (Ext): 68"

Weight (Net): 8840 lb
 Volume (Net): 2.26cu.yd