

Job Name: 25-1431 - Georgetown Commons
 Job Location: Georgetown, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

Tech: J. Coppage

4/9/2026 9:59:52 AM

PC: A. Chambers



Structure ID: CBI 233

P1 BX3648-08BAVF

BOX BASE 8inW, 8inF, Variable Ht

- P4) 24" x 60" - CB INLET KY A 5' TOP LEFT - 10"
- P3) 24" x 60" - CB INLET KY A 5' BOTTOM LEFT - 18"
- P2) 36" x 48" - CB FT REDUCER 24"X36" HOLE - 8"
- P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht - 64"
- 1) 36" x 48" - Conseal CS-102 1.00"
- 1) 24" x 36" - Conseal CS-102 1.00"
- 2) Hole - 30
- 1) Hole - 20
- 1) Hole - 6

- Structure Notes:**
1. JR HOE KY-206 PROVIDED BY ICAST.
 2. CASTING FRAME TO BE CAST INTO THE TOP PHASE.
 3. PER KYTC CBI TYPE A / ASTM C478 SPEC'S.
 4. CONCRETE = 4,000 PI AT 28 DAYS.
 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.




Structure Total: 15831 lb

Rim: 878.7' Rim to Invert: 8.2' Slack: 1.4" Sump: 3" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	870.5'	0°	26"	24" HDPE	27.8"	Hole 30	30"	30"	0"	0"
Invert 2	870.5'	90°	32"	15" HDPE	17.6"	Hole 20	20"	20"	0.5"	0"
Invert 3	873'	160°	22.993"	24" HDPE	27.8"	Hole 30	30"	31.925"	30"	8.119"
Invert 4	874.82'	230°	10.183"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	7.832"	53.84"	0"
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

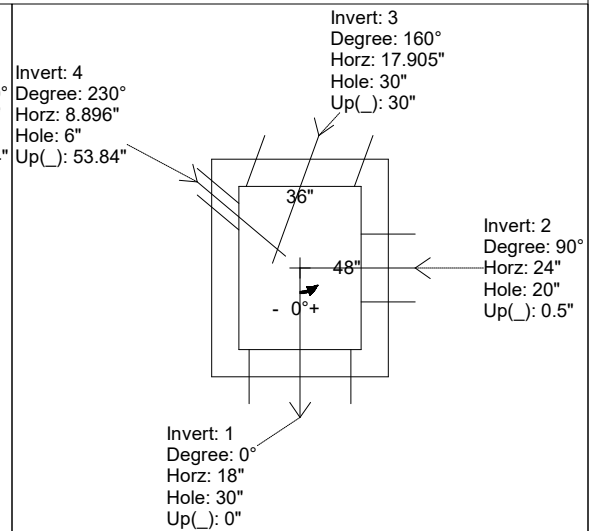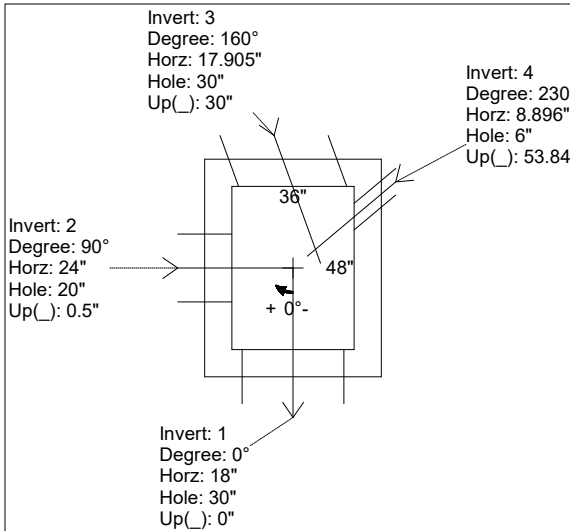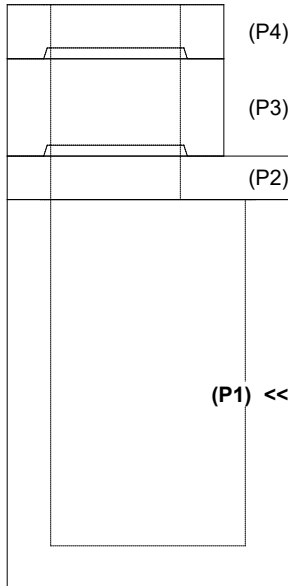

INSIDE WALL DIMENSIONS

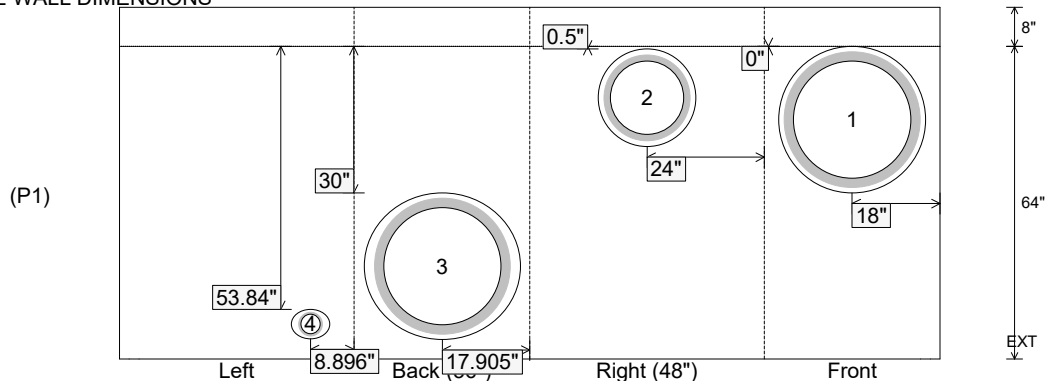

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 64"
Height (Ext): 72"

Weight (Net): 9612 lb
Volume (Net): 2.46cu.yd