

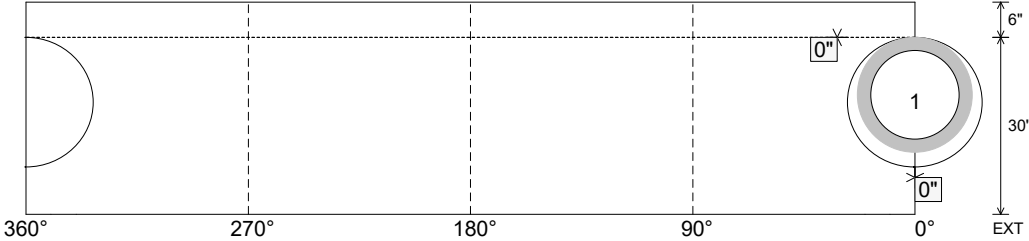


Job Name: 26-2104 - Jeffersonville High School Parking Lot Job Location: Jeffersonville, IN Contractor: Mac Construction & Excavating, Inc.					Plant: 100 6/27/2026 7:12:47 PM		Tech: Jared - A PC: T. Lewis				
Structure ID: 5 ST-CI											
P1 MH048BA30		MH BASE F/n									
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x36" Hole F/F - 7" P1) 48" - MH BASE F/n - 30" 1) 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 22					0 lb 1044 lb 3151 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 4195 lb		Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STORM INVERT BY OTHERS 5. NO STEPS 6. HOE 525 FRAME, GRATE, & CURB HOOD SUPPLIED BY OTHERS				
Rim: 484.07' Rim to Invert: 3.55' Slack: 1.85' Sump: 2.25' Step Position: 180°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	480.52'	0°	0"	15" RCP B WALL	19.5"	Hole 22	22"	22.854", 15.213"	0"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
 (P3) (P2) (P1) << RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)  Invert: 1 Degree: 0° Horz: 0" Hole: 22" Up(): 0" INSIDE WALL DIMENSIONS  (P1) 360° 270° 180° 90° 0° EXT 6" 30" 0"											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: n/a		Wall Thickness: 5" Floor Height: 6"		Height (Int): 30" Height (Ext): 36"		Weight (Net): 3151 lb Volume (Net): 0.8cu.yd	