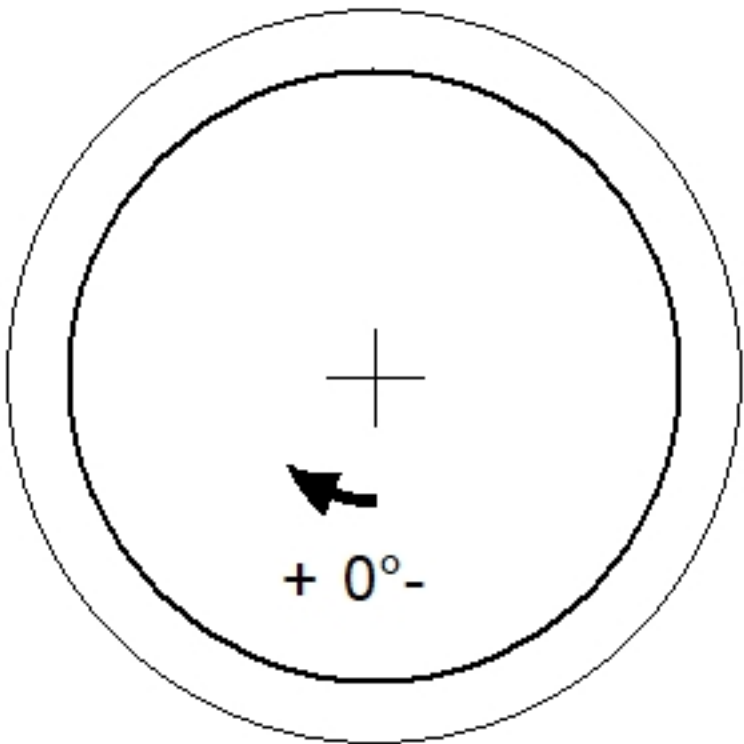
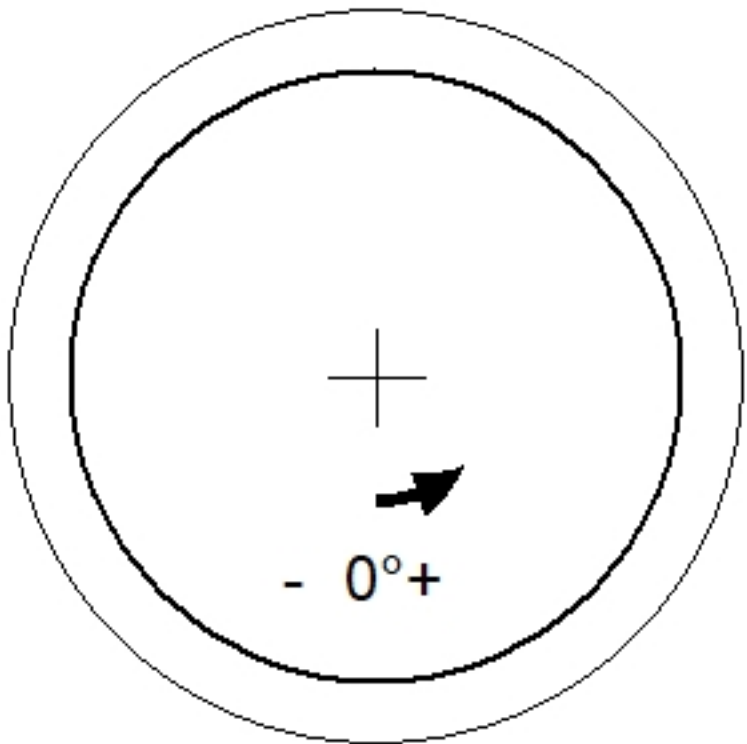
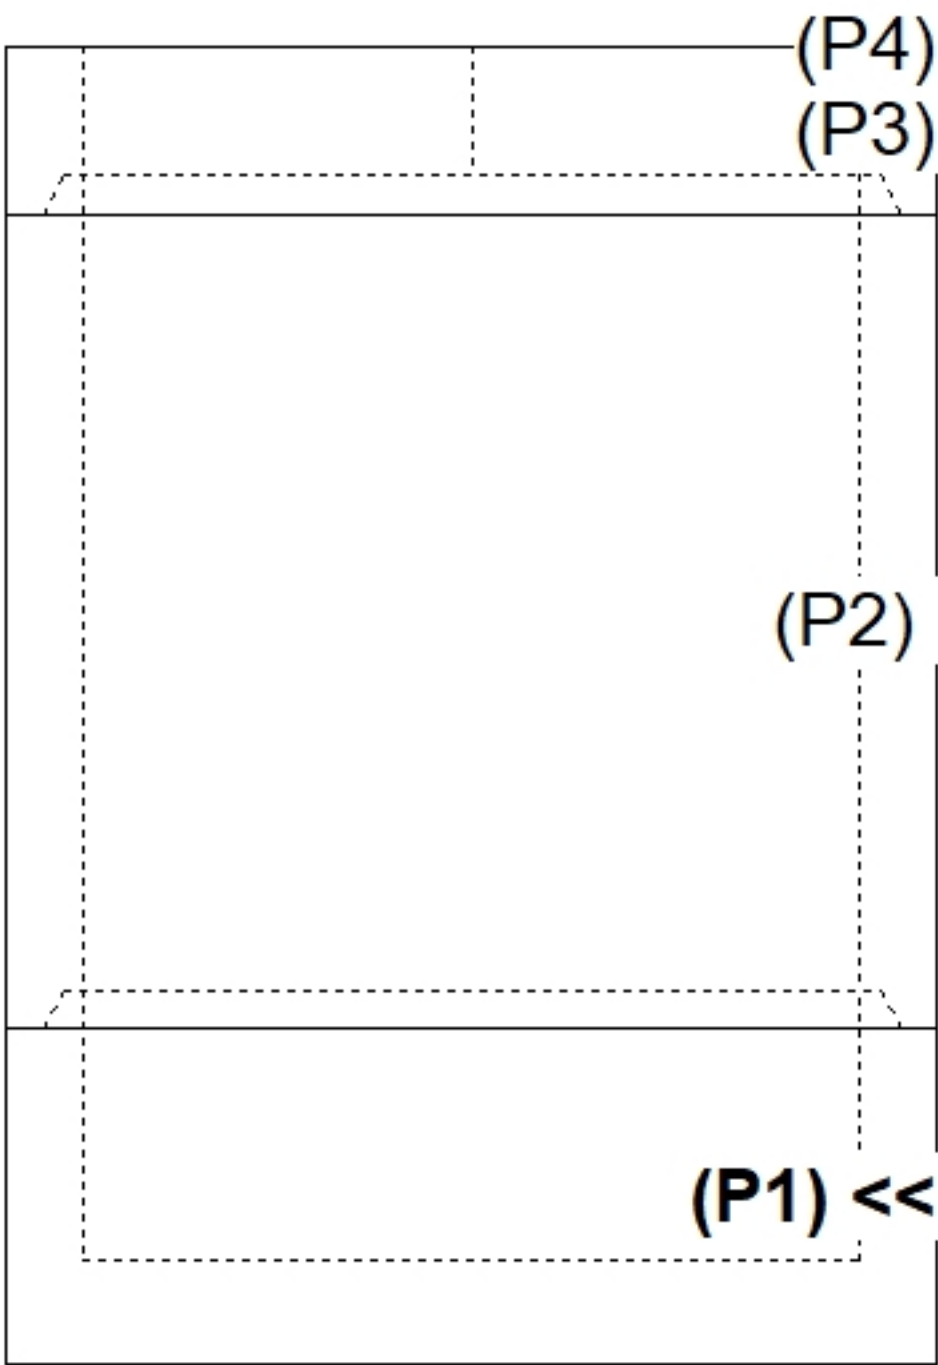
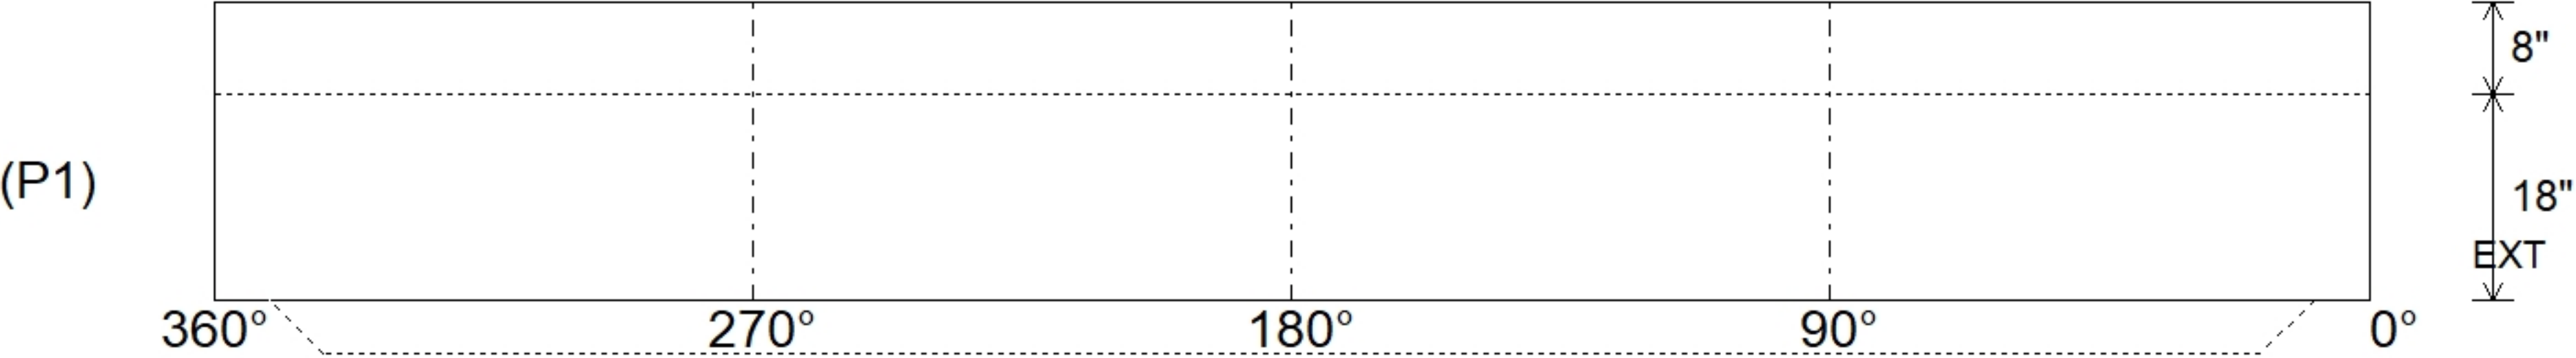


Job Name: 26-2800 901652 13635 Telegraph Road Job Location: CPU Contractor: Contech Engineering Solutions					Plant: Beaver Dam 6/24/2026 10:19:00 AM		Tech: S. Felletter PC: C. Goff				
Structure ID: 10-CS-5											
P1		MH060BAVF		MH BASE Custom Ht T/n							
P4) 30" - CASTING HEIGHT - 0" P3) 60" - MH FLAT TOP SPEC. (30" CASTING CAST IN) F/G - 13" P2) 60" - MH RISER Custom Ht T/G - 63" P1) 60" - MH BASE Custom Ht T/n - 18" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 2) 60" - Conseal CS-102 1.00" 2) Hole - 16						0 lb 2589 lb 6372 lb 4612 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 13573 lb		Structure Notes: 4" CASTING BY OTHERS . LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE . ICAST TO INSTALL THE INTERNALS . CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE			
Rim: 611.63' Rim to Invert: 3.06' Slack: -0.244" Sump: 57.036" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions) 											
 INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 6" Floor Height: 8"		Height (Int): 18" Height (Ext): 26"		Weight (Net): 4612 lb Volume (Net): 1.18cu.yd	