


Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures Job Location: Bowling Green, KY Contractor: Scotty's Contracting & Stone, LLC				Plant: Beaver Dam 8/11/2026 9:19:39 AM		Tech: S. Felletter PC: M. Sullivan				
Structure ID: DBI-13										
P1 BX6060-08BAVF				BOX BASE 8inW, 8inF, Variable Ht F/n						
P3) 24" x 30" - CASTING HEIGHT - 3.50" P2) 60" x 60" - BX FLAT LID 8inW w/24"x30" HOLE F/F - 8" P1) 60" x 60" - BOX BASE 8inW, 8inF, Variable Ht F/n - 52" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 1) 60" x 60" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 56"x54" 1) Hole - 50 4) MH Step ML-10-TDS-NCR - 10"						0 lb 3394 lb 10088 lb 421 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 13903 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-460-11 F/G). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS/FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Rim: 583.92' Rim to Invert: 5.35' Slack: 0.7" Sump: 0" Step Position: 0°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	578.57'	20°	40.923"	48" HDPE	53.5"	DOGHOUSE INVRTD 56"x54"	56" x 54"	59.594"	-2.95"	-10.25"
Invert 2	578.57'	270°	38"	42" HDPE	47.7"	Hole 50	50"	50"	-3.15"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

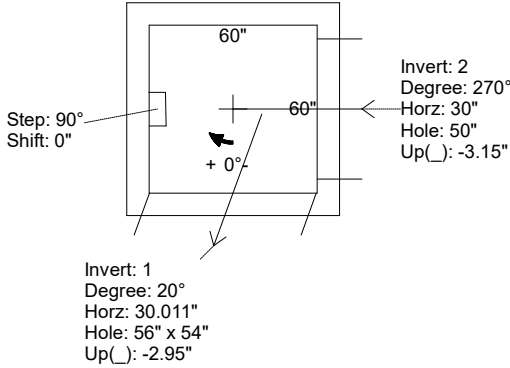


UPSIDE-DOWN VIEW (int. dimenions)


2 Stage pour required

First pour drawing
First pour weight = 3,870 LBS
Second pour weight = 6,218 LBS

****Lift anchors to be cast into base slab****

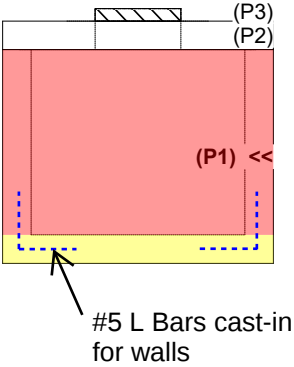


INSIDE WALL DIMENSIONS

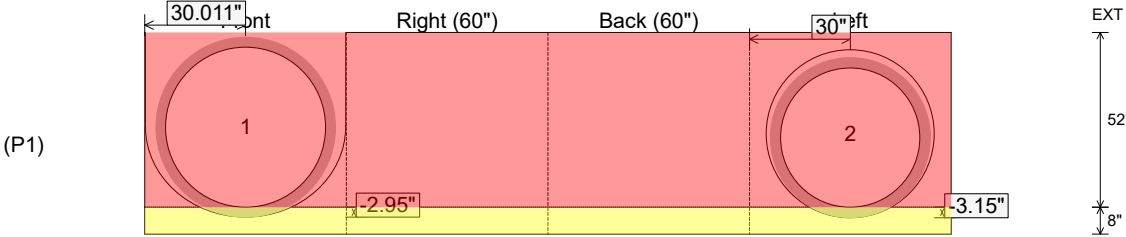

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 52" Height (Ext): 60"	Weight (Net): 10088 lb Volume (Net): 2.58cu.yd
----------------------------------	-------------------------------	--	--	---

Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures Job Location: Bowling Green, KY Contractor: Scotty's Contracting & Stone, LLC				Plant: Beaver Dam 8/11/2026 9:19:39 AM		Tech: S. Felletter PC: M. Sullivan				
Structure ID: DBI-13										
P1 BX6060-08BAVF				BOX BASE 8inW, 8inF, Variable Ht F/n						
P3) 24" x 30" - CASTING HEIGHT - 3.50" P2) 60" x 60" - BX FLAT LID 8inW w/24"x30" HOLE F/F - 8" P1) 60" x 60" - BOX BASE 8inW, 8inF, Variable Ht F/n - 52" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 1) 60" x 60" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 56"x54" 1) Hole - 50 4) MH Step ML-10-TDS-NCR - 10"						0 lb 3394 lb 10088 lb 421 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 13903 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-460-11 F/G). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS/FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Rim: 583.92' Rim to Invert: 5.35' Slack: 0.7" Sump: 0" Step Position: 0°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	578.57'	20°	40.923"	48" HDPE	53.5"	DOGHOUSE INVRTD 56"x54"	56" x 54"	59.594"	-2.95"	-10.25"
Invert 2	578.57'	270°	38"	42" HDPE	47.7"	Hole 50	50"	50"	-3.15"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

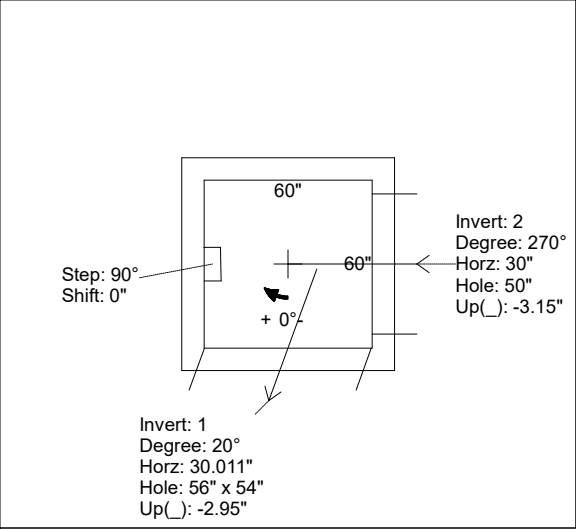

UPSIDE-DOWN VIEW (int. dimenions)


2 Stage pour required

Second pour drawing


First pour weight = 3,870 LBS

Second pour weight = 6,218 LBS

****Lift anchors to be cast into base slab****

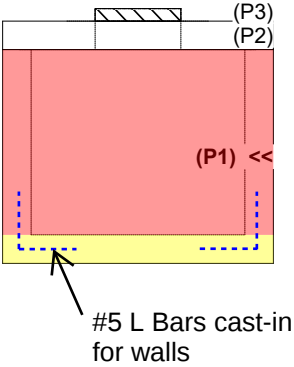

INSIDE WALL DIMENSIONS

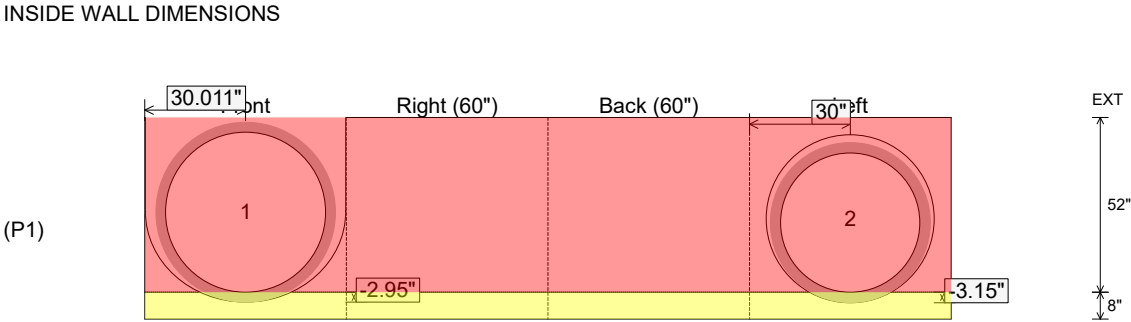

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 52" Height (Ext): 60"	Weight (Net): 10088 lb Volume (Net): 2.58cu.yd
----------------------------------	-------------------------------	--	--	---