

**Structure ID: CBI 1906**

**P3 BX2436-08R18 BOX RISER 8inW T/G**

P5) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10" P4) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18" P3) 24" x 36" - BOX RISER 8inW T/G - 18" P2) 48" x 36" - CB FT REDUCER 24"X36" HOLE T/F - 8" P1) 48" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 46" 1) CASTING - HOE KY-206 F/C (KY TY1) 2) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 30 1) Hole - 24	3400 lb 5270 lb 1837 lb 1654 lb 7051 lb 206 lb 0 lb 0 lb 0 lb ----- Structure Total: 19417 lb
---	---



Structure Notes:  
 \*\* KYTC STATE PROJECT \*\*  
 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.  
 2. CONCRETE = 4,000 PI AT 28 DAYS.  
 3. NO INVERT CHANNEL.

REINFORCING PER ASTM A615 (GRADE 60).  
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.  
 - TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W (DBL MAT)  
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.  
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 889.13'    Rim to Invert: 8.35'    Slack: 0.2"    Sump: 0"    Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

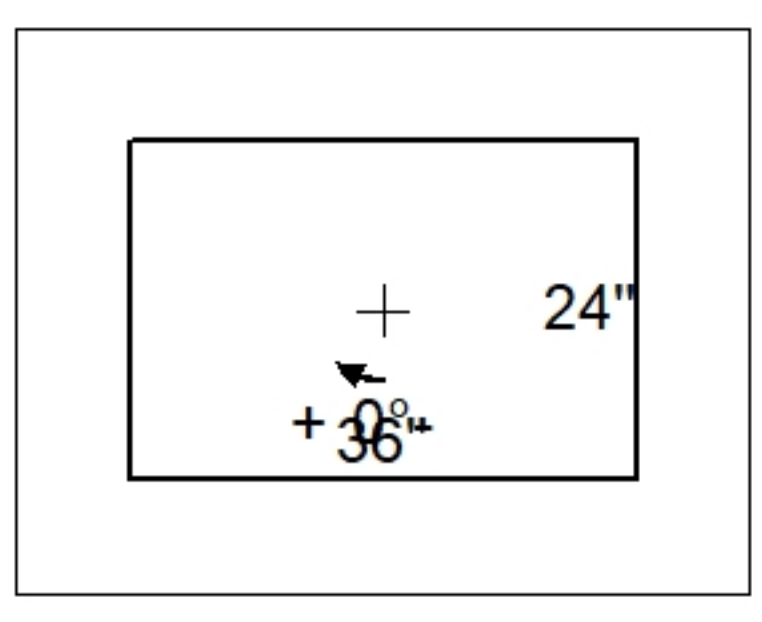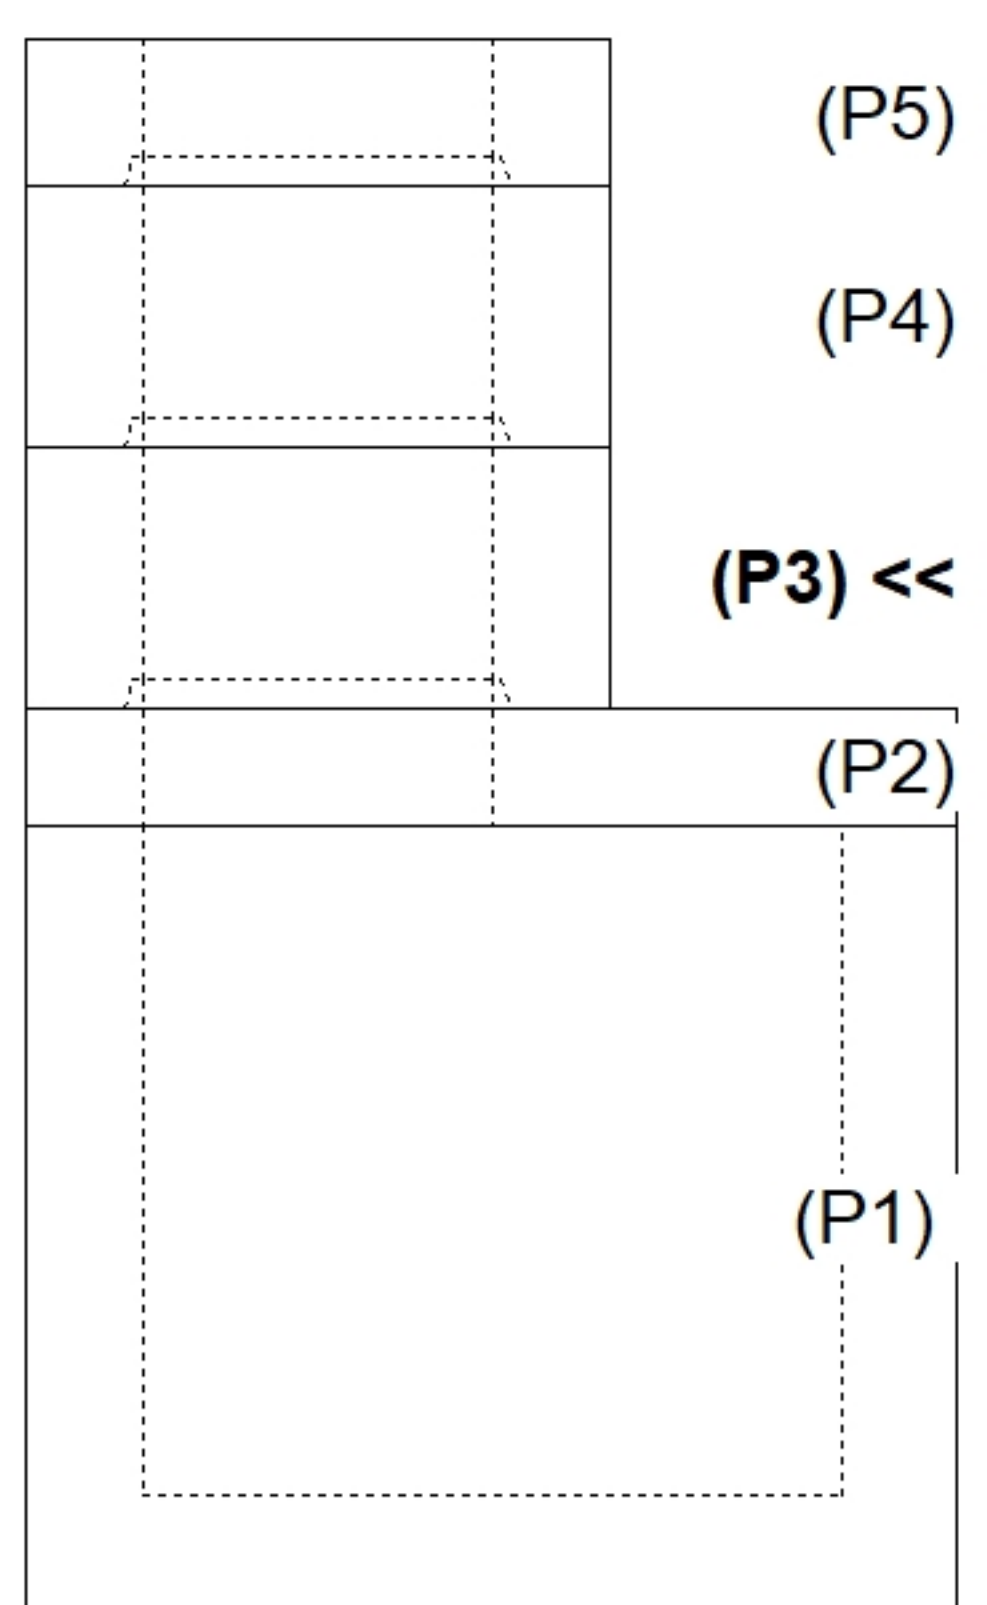

**INSIDE WALL DIMENSIONS**

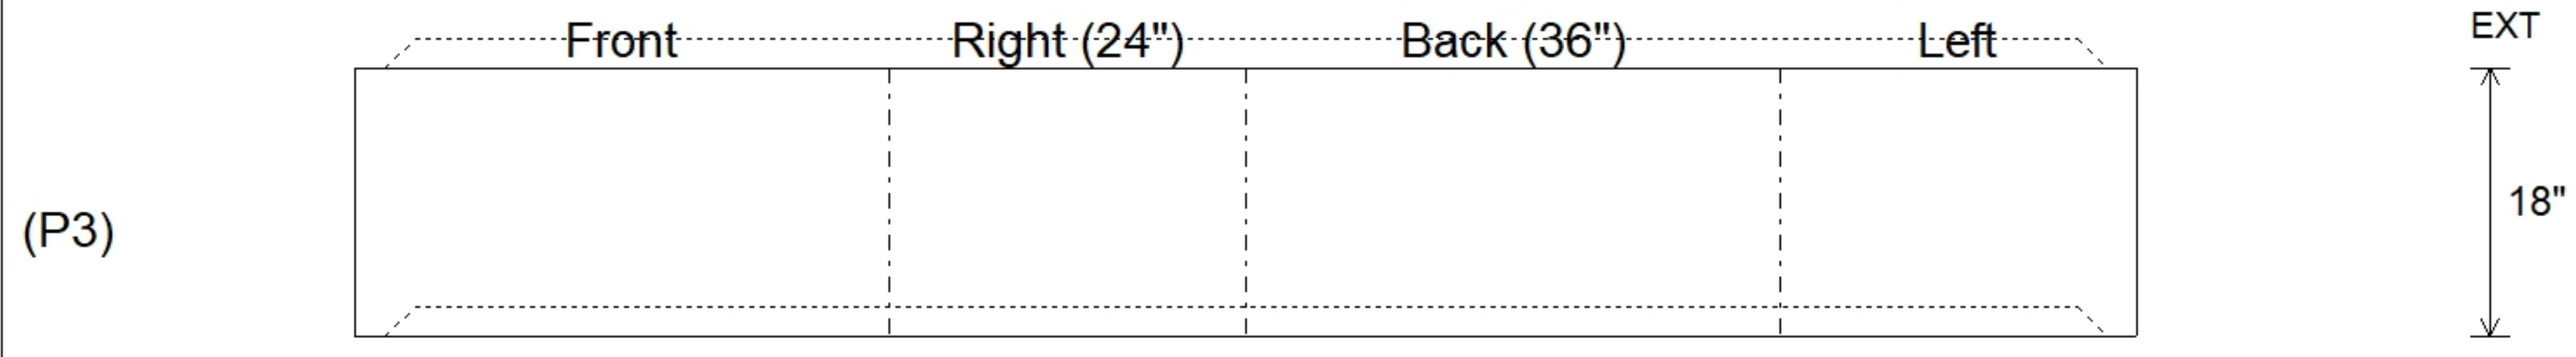

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 18" Height (Ext): 18"
Coating (Ext):			Weight (Net): 1837 lb Volume (Net): 0.47cu.yd