

Structure ID: CBI 1909

P2 BX2436-08R36

BOX RISER 8inW T/G

P4) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10" P3) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18" P2) 24" x 36" - BOX RISER 8inW T/G - 36" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht T/n - 27" 1) CASTING - HOE KY-206 F/C (KY TY1) 2) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 20	3400 lb 5270 lb 3462 lb 3919 lb 206 lb 0 lb 0 lb ----- Structure Total: 16257 lb
--	--



Structure Notes:
 ** KYTC STATE PROJECT **
 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
 2. CONCRETE = 4,000 PI AT 28 DAYS.
 3. NO INVERT CHANNEL.

REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 892.89' Rim to Invert: 7.6' Slack: 0.2" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2	888.37'	180°	20"	15" HDPE	17.6"	Hole 20	20"	20"	5.5"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

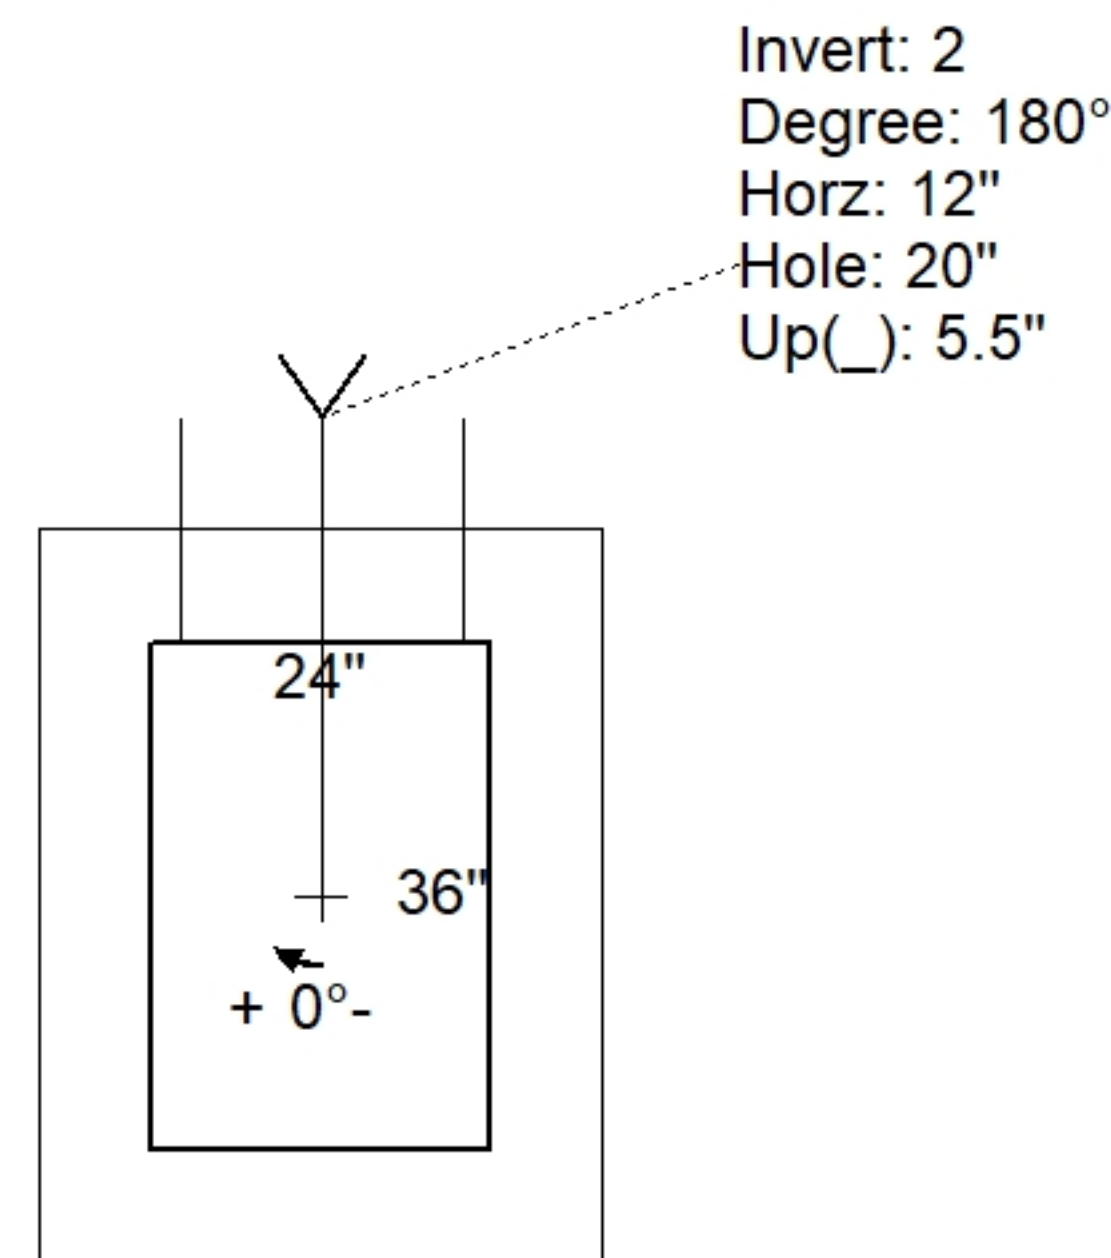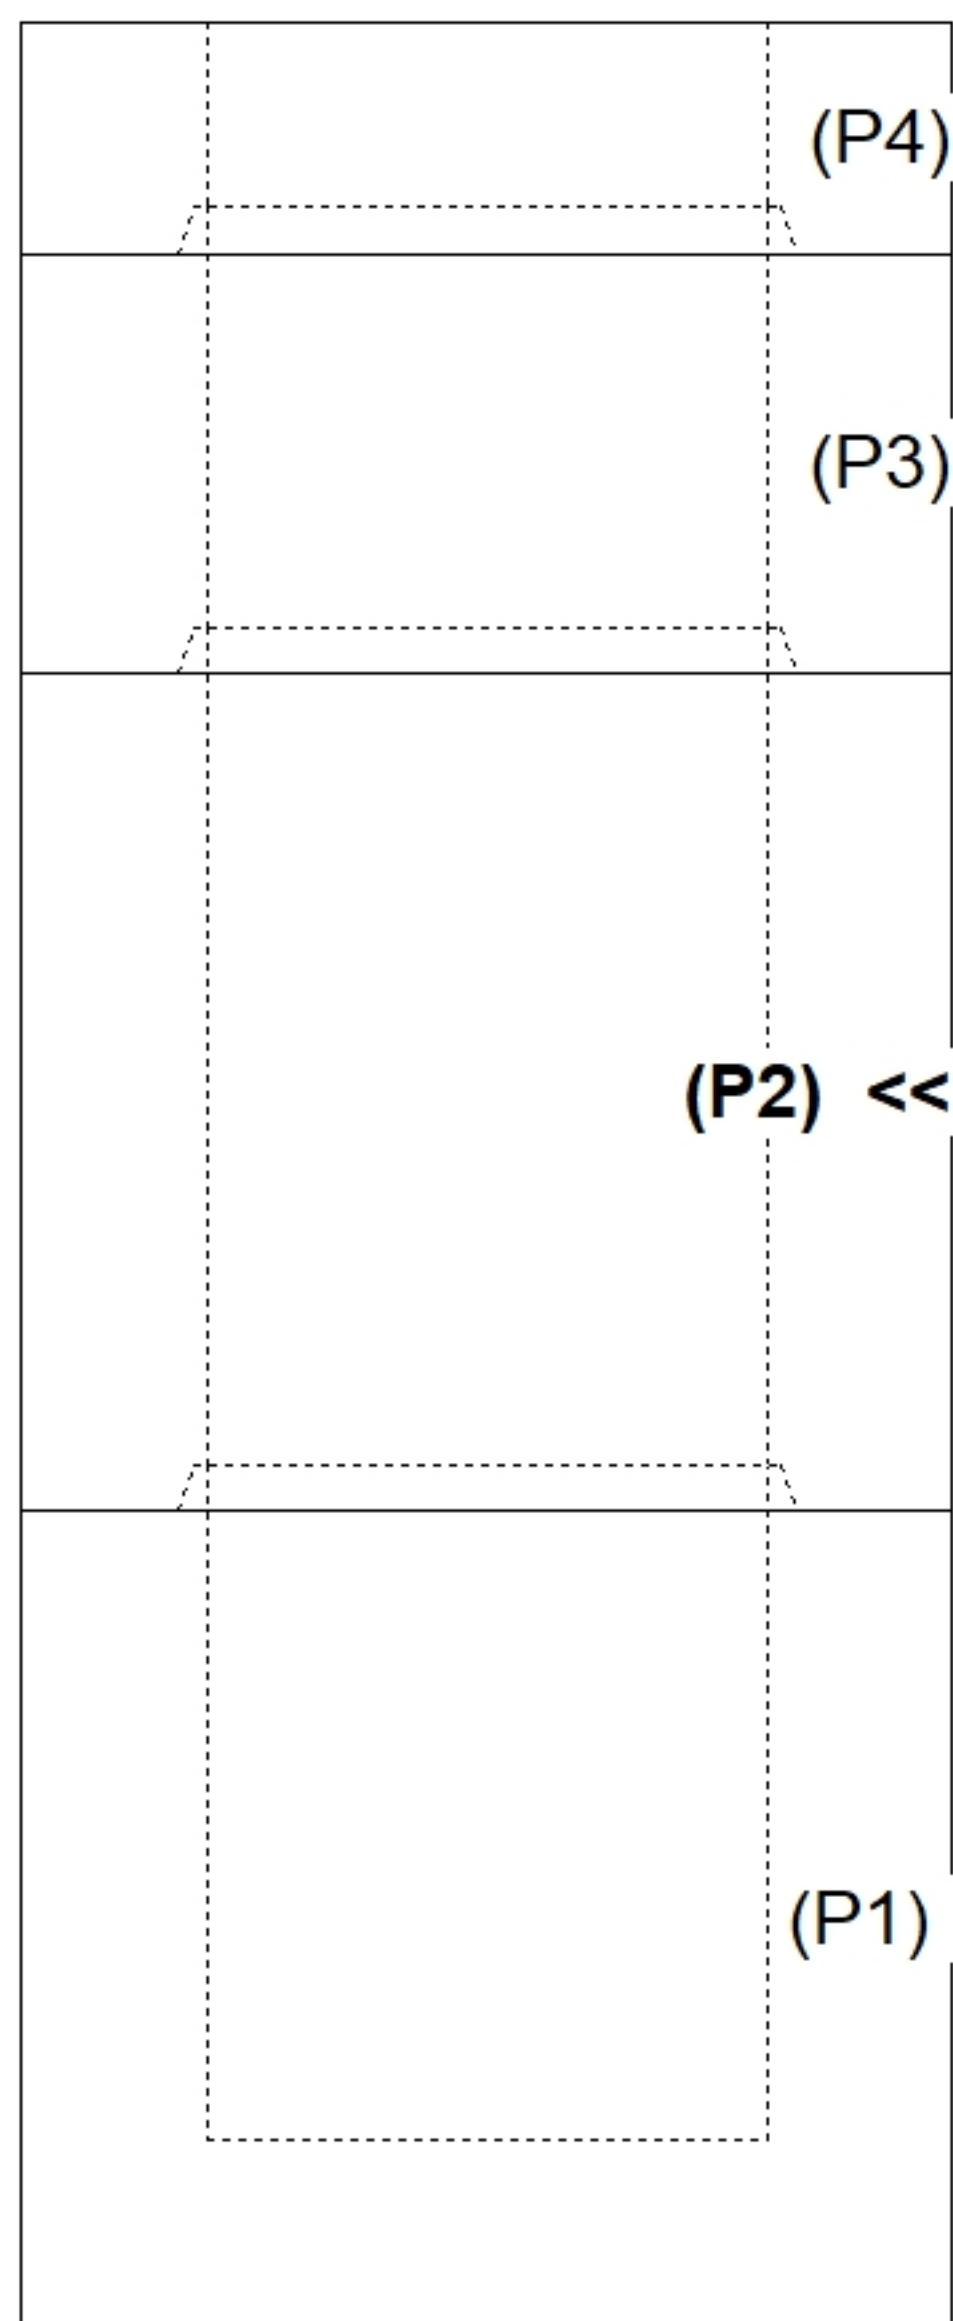

INSIDE WALL DIMENSIONS

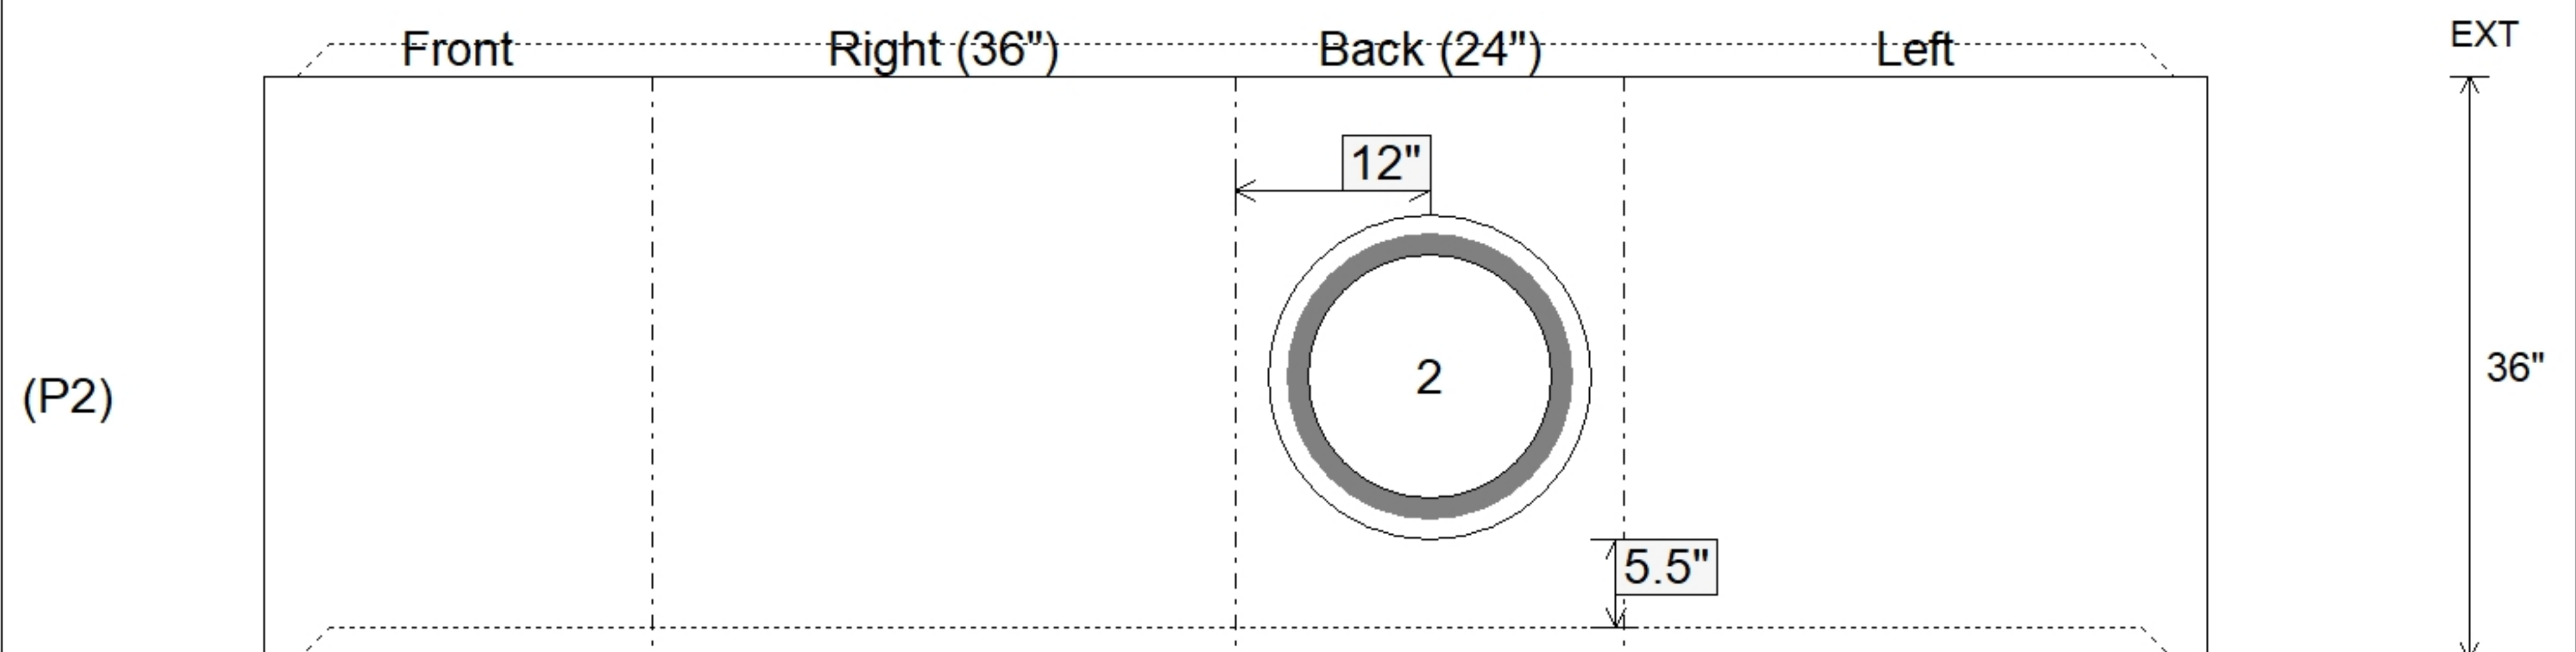

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"
Coating (Ext):			Weight (Net): 3462 lb Volume (Net): 0.88cu.yd