

Structure ID: MH 2402

P1 MH048BA48

MH BASE T/n

P3) 24" - CASTING HEIGHT - 7" P2) 48" - ECC CONE w/ 24" HOLE F/G - 24" P1) 48" - MH BASE T/n - 48" 1) CASTING - HOE MC-350 F/C Storm 1) 48" - Conseal CS-102 1.00" 2) Hole - 24 6) MH Step ML-10-TDS-NCR - 10"	0 lb 1550 lb 4289 lb 305 lb 0 lb 0 lb 0 lb ----- 6144 lb	Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PI AT 28 DAYS. 3. CASTING BY ICAST (HOE MS-350 F/C) REINFORCING PER ASTM A615 (GRADE 60). - CONE/RISER (As .12). - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
--	--	--



Structure Total: 6144 lb

Rim: 889.6' Rim to Invert: 6.62' Slack: 0.44" Sump: 0" Step Position: 111.5°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	882.98'	0°	0"	18" HDPE	21.2"	Hole 24	24"	25.133"	-3"	0"
Invert 2	882.98'	223°	112.875"	18" HDPE	21.2"	Hole 24	24"	25.133"	-3"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

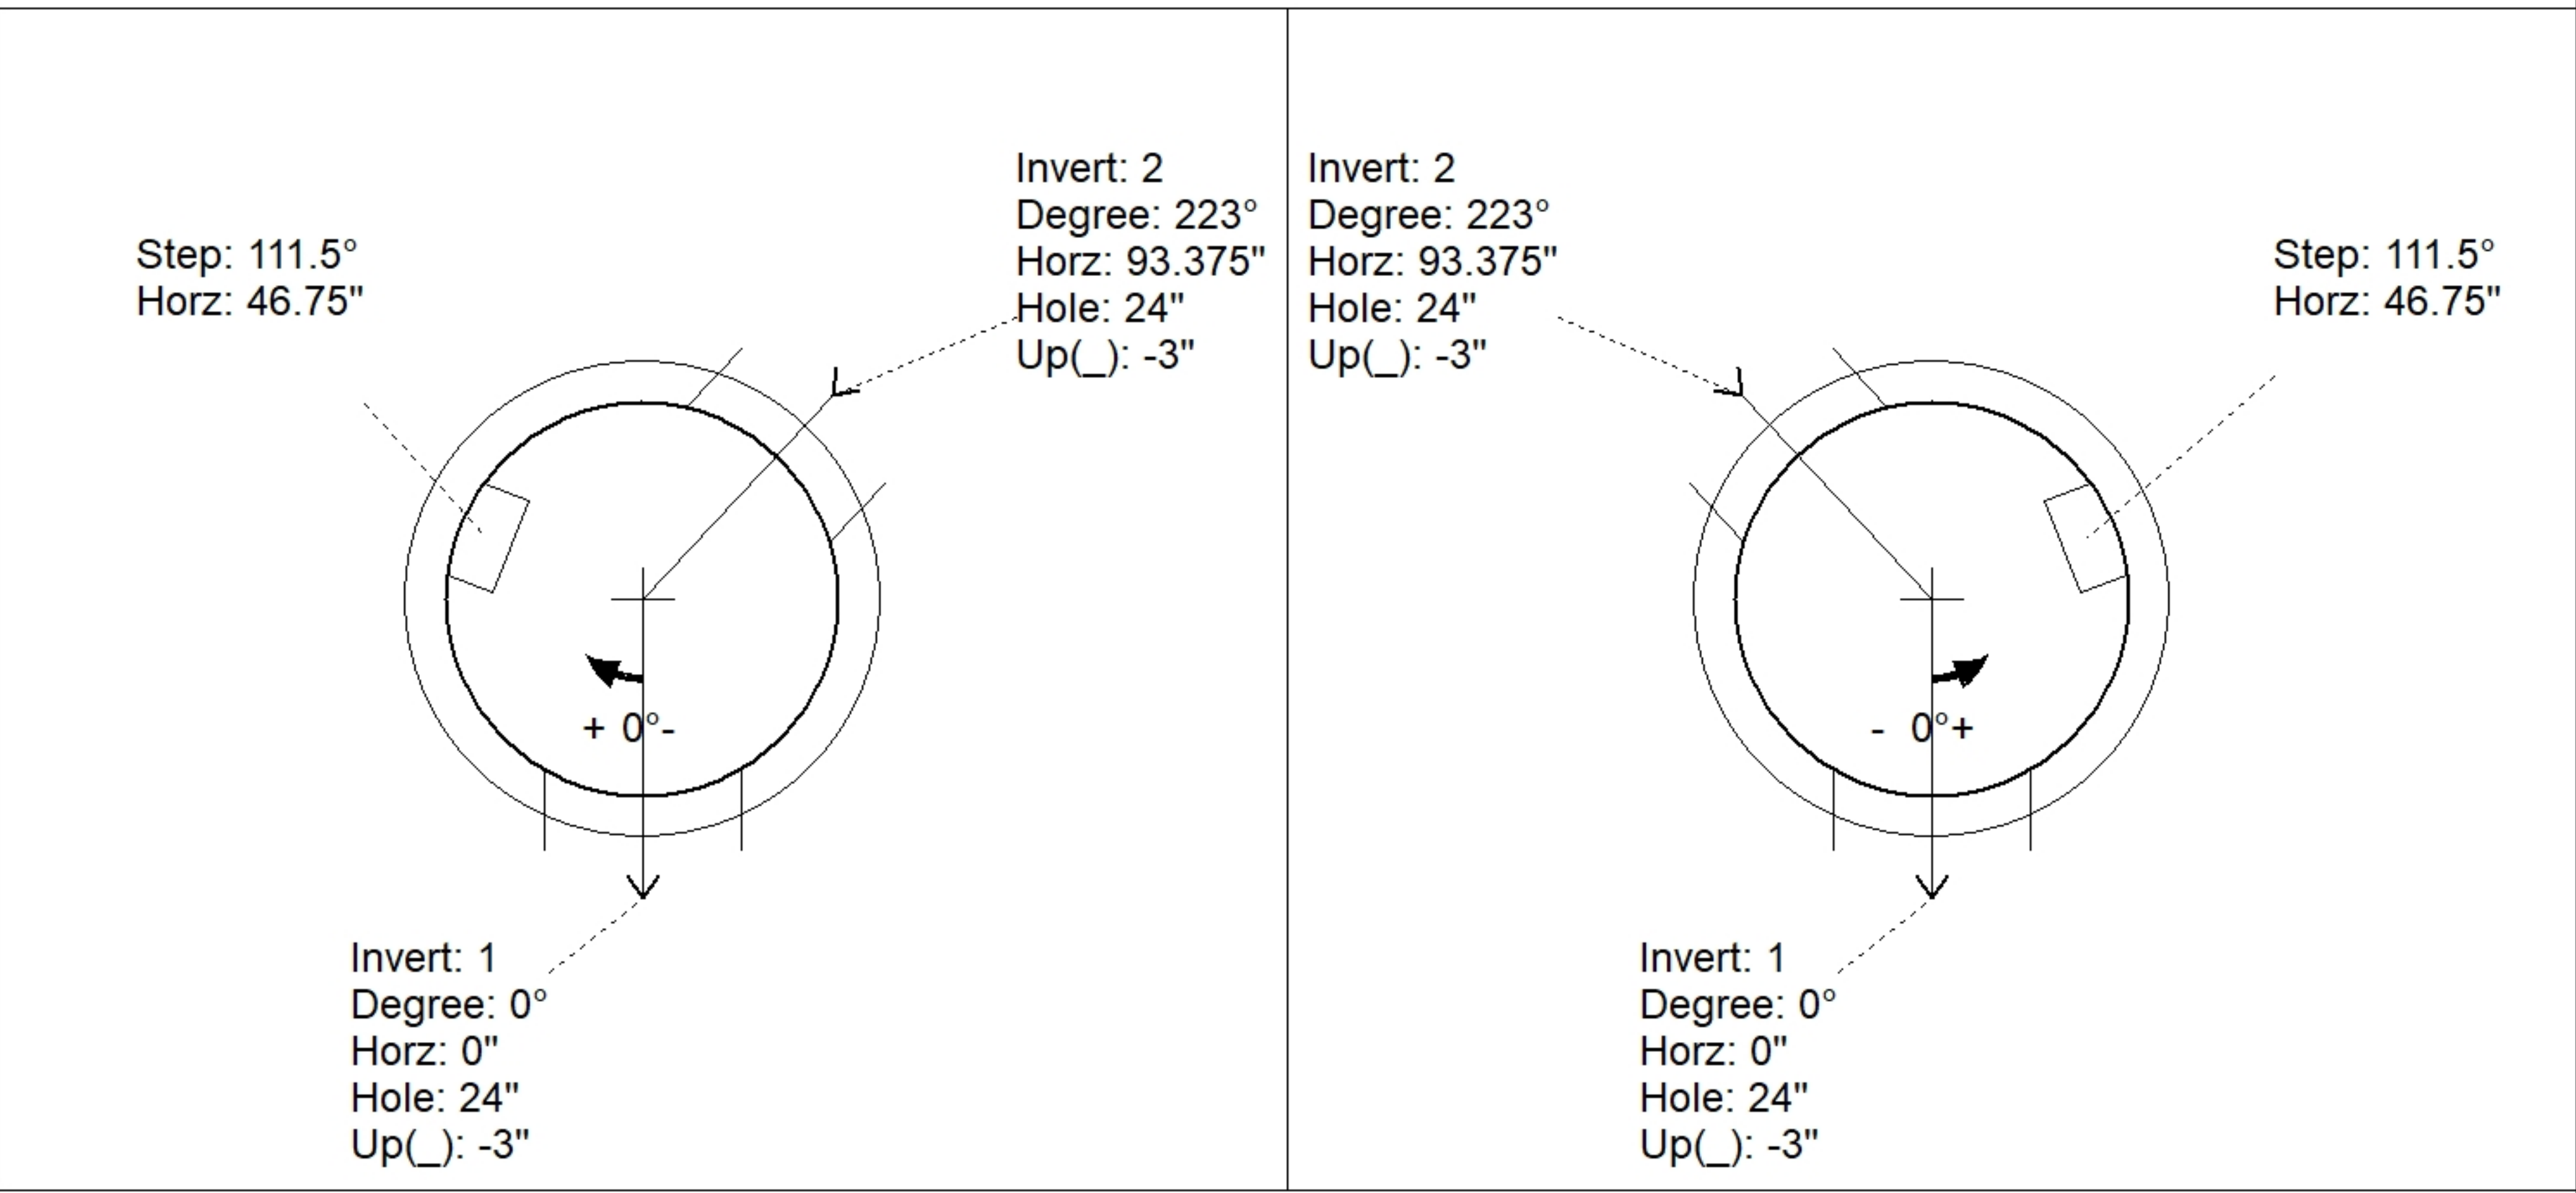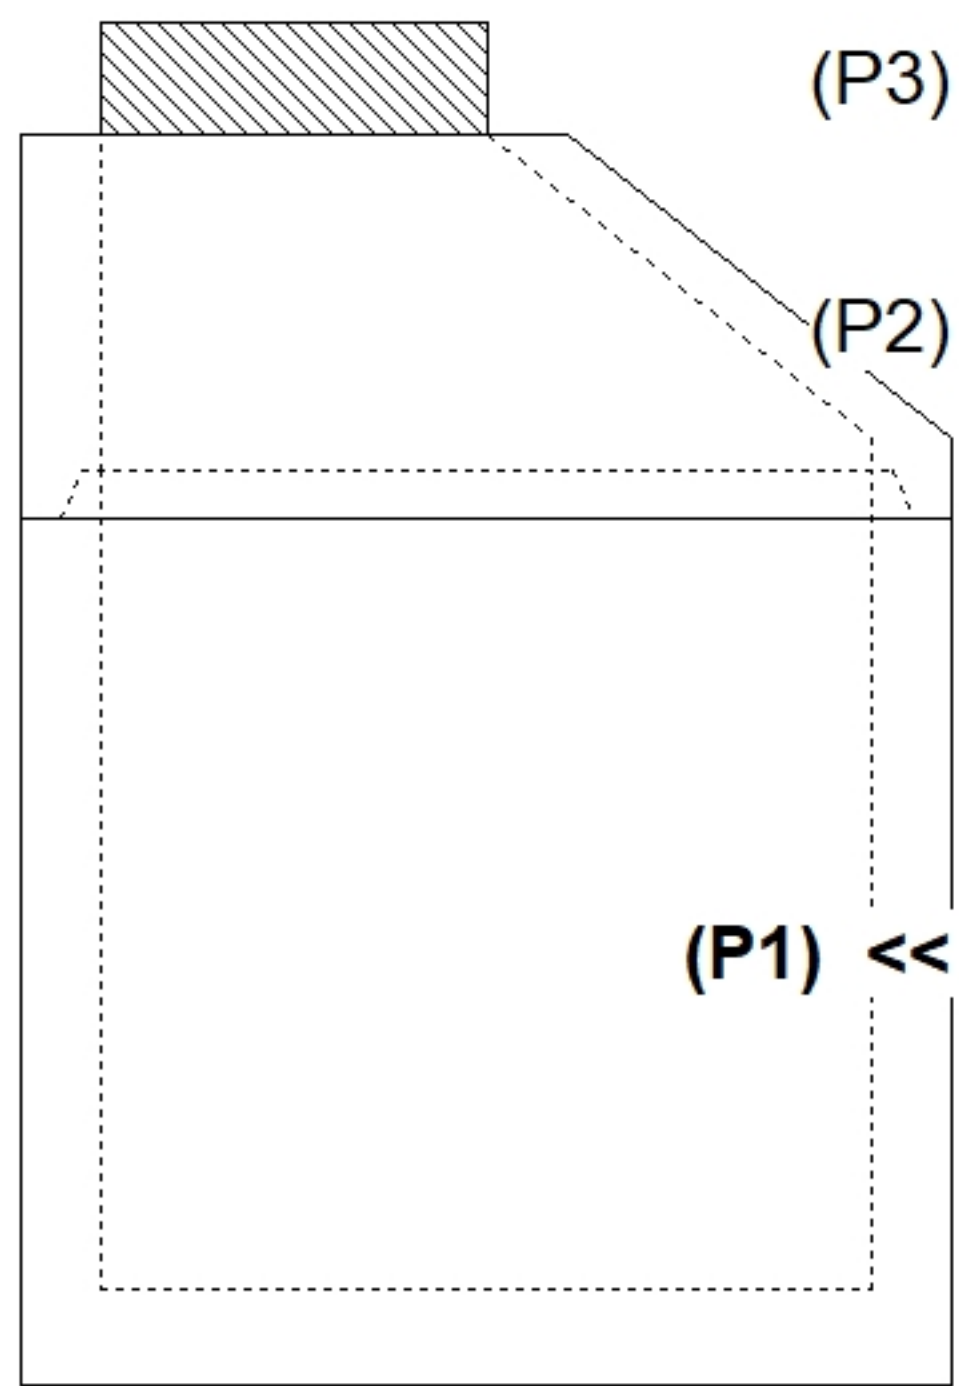

INSIDE WALL DIMENSIONS

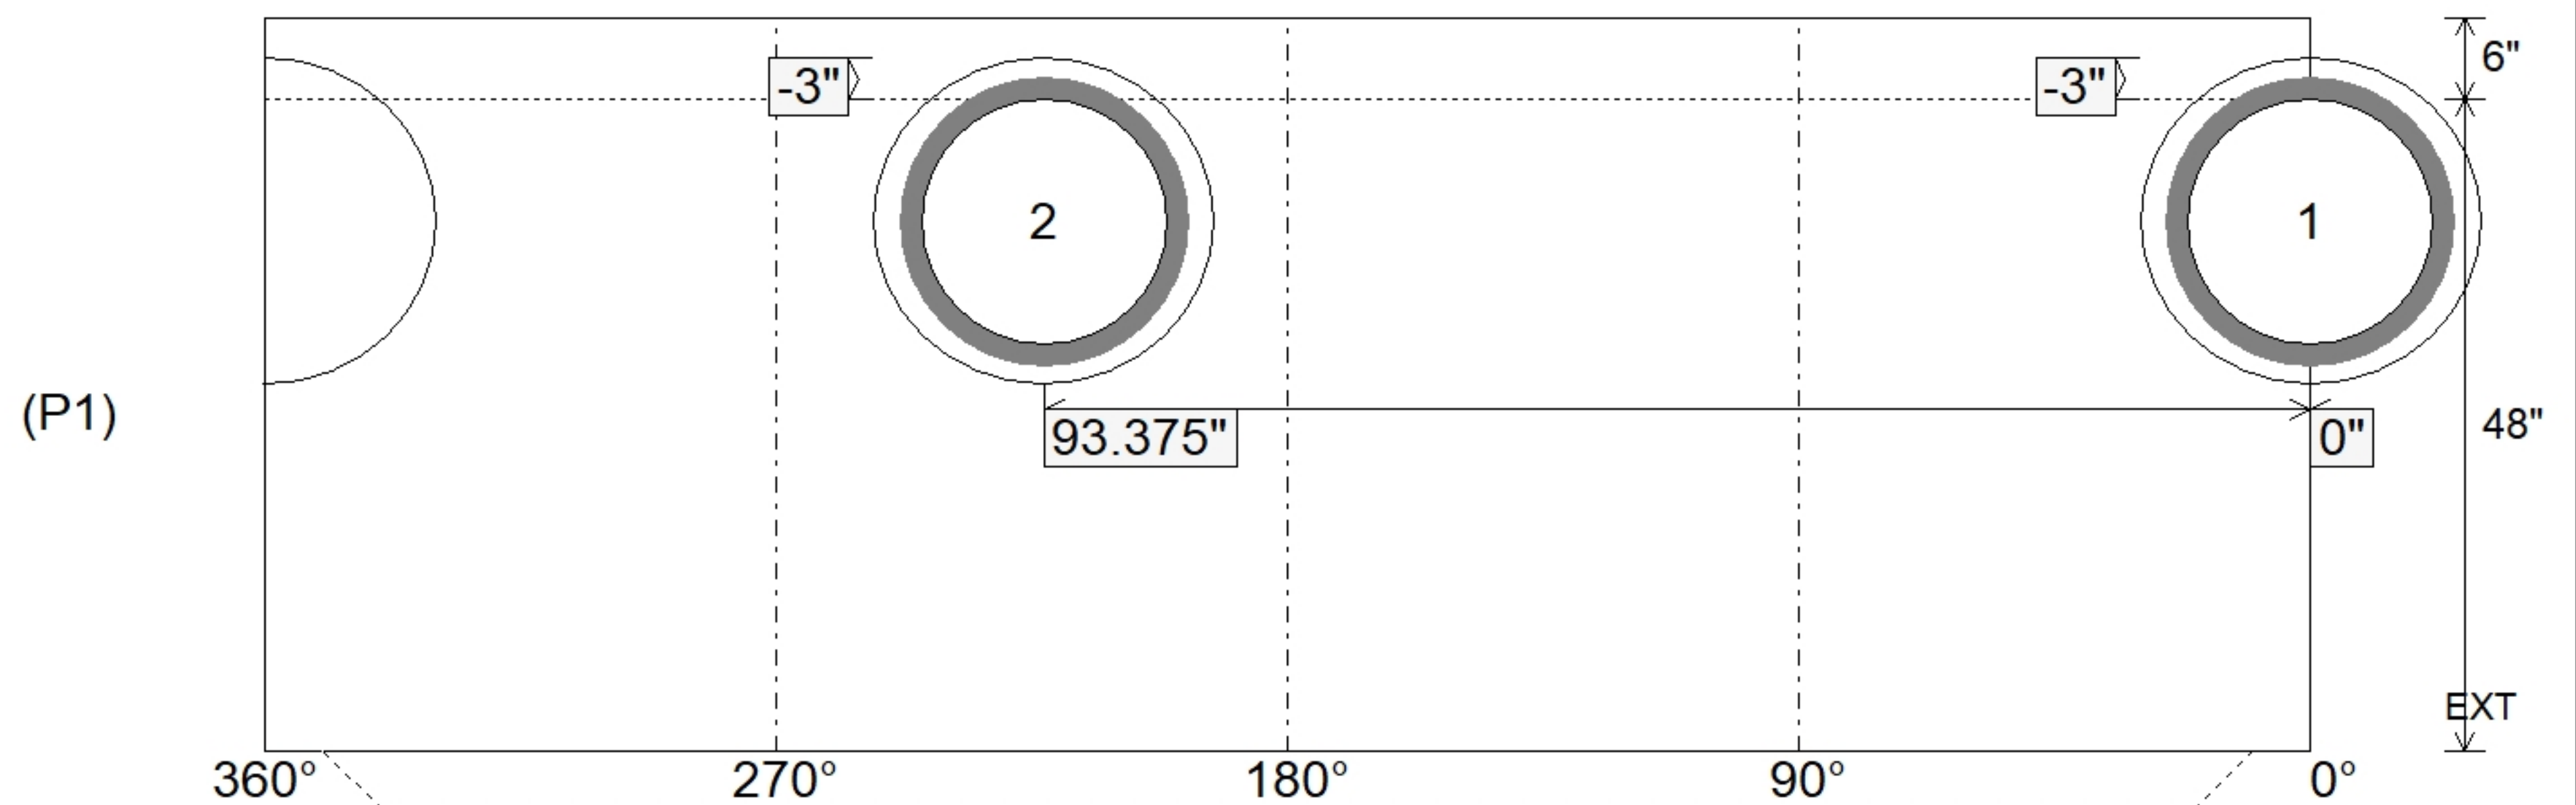

Coating (Int):	Seam Up: Tongue	Wall Thickness: 5"	Height (Int): 48"
Coating (Ext):	Seam Dn: n/a	Floor Height: 6"	Height (Ext): 54"
		Weight (Net): 4289 lb	
		Volume (Net): 1.1cu.yd	