

Job Name: 26-2484 Bass Pro Shops Outpost Paducah

Job Location: Paducah, KY

Contractor: Central Paving Co. of Paducah, Inc.

Plant: Beaver Dam

6/16/2026 8:02:28 AM

Tech: S. Felletter

PC: A. Chambers



Structure ID: X3.2 ST-CI

P1 BX2424-08BA36

BOX BASE 8inW, 8inF F/n

P2) 24" x 24" - CASTING HEIGHT - 5"

P1) 24" x 24" - BOX BASE 8inW, 8inF F/n - 36"

1) CASTING - HOE KY-465 SET (CBI TY F)

1) 24" x 24" - Conseal CS-102 1.00"

2) Hole - 24

0 lb

3712 lb

465 lb

0 lb

0 lb

0 lb

Structure Total: 4177 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. CASTING BY ICAST (HOE 465 F/G/H).

REINFORCING PER ASTM A615 (GRADE 60).

- WALLS (As .12) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 367.11'

Rim to Invert: 3.31'

Slack: 0.32"


Sump: 1.6"

Step Position: 0°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	363.8'	0°	20"	18" HDPE	21.2"	Hole 24	24"	24"	0"	0"
Invert 2	363.8'	270°	20"	18" HDPE	21.2"	Hole 24	24"	24"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

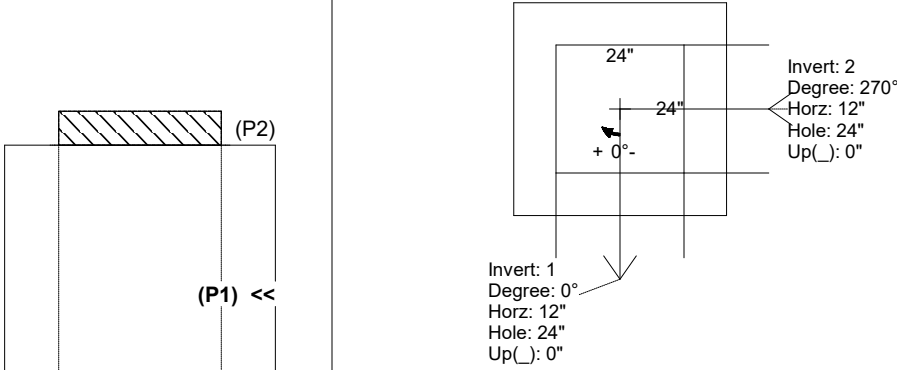


(P1) <<

(P2)

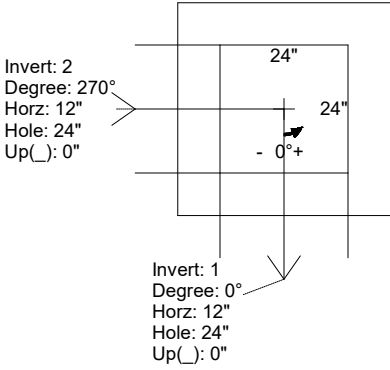

INSIDE WALL DIMENSIONS

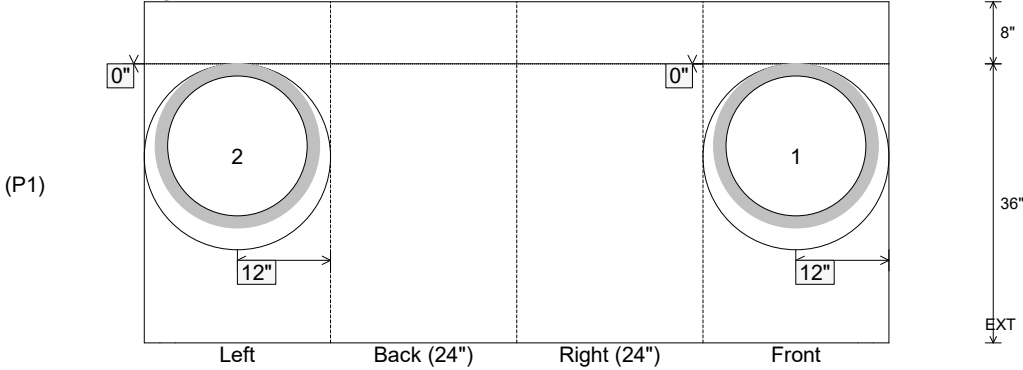

(P1)

Left Back (24") Right (24") Front

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 36"

Height (Ext): 44"

Weight (Net): 3712 lb

Volume (Net): 0.95cu.yd