

Job Name: 26-2484 Bass Pro Shops Outpost Paducah
Job Location: Paducah, KY
Contractor: Central Paving Co. of Paducah, Inc.

Plant: Beaver Dam

6/16/2026 8:01:25 AM

Tech: S. Felletter

PC: A. Chambers



Structure ID: Z3 ST-OCS


P3 MH048LD12S

MH FLAT TOP SPECIAL (MCS-295-B) F/G


- P4) 24" - CASTING HEIGHT - 0"
P3) 48" - MH FLAT TOP SPECIAL (MCS-295-B) F/G - 12"
P2) 48" - MH RISER T/G - 24"
P1) 48" - MH BASE T/n - 72"
1) SECONDARY POUR - WEIR WALL
1) CASTING - HOE MCS-295B F/G
2) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 24"

Structure Total:

- 0 lb
1593 lb
1677 lb
5966 lb
1099 lb
123 lb
0 lb
0 lb
0 lb
10458 lb
- Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MCS-295-B F/G). CAST-IN.
4. WEIR WALL POURED IN PLACE BY ICAST.
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

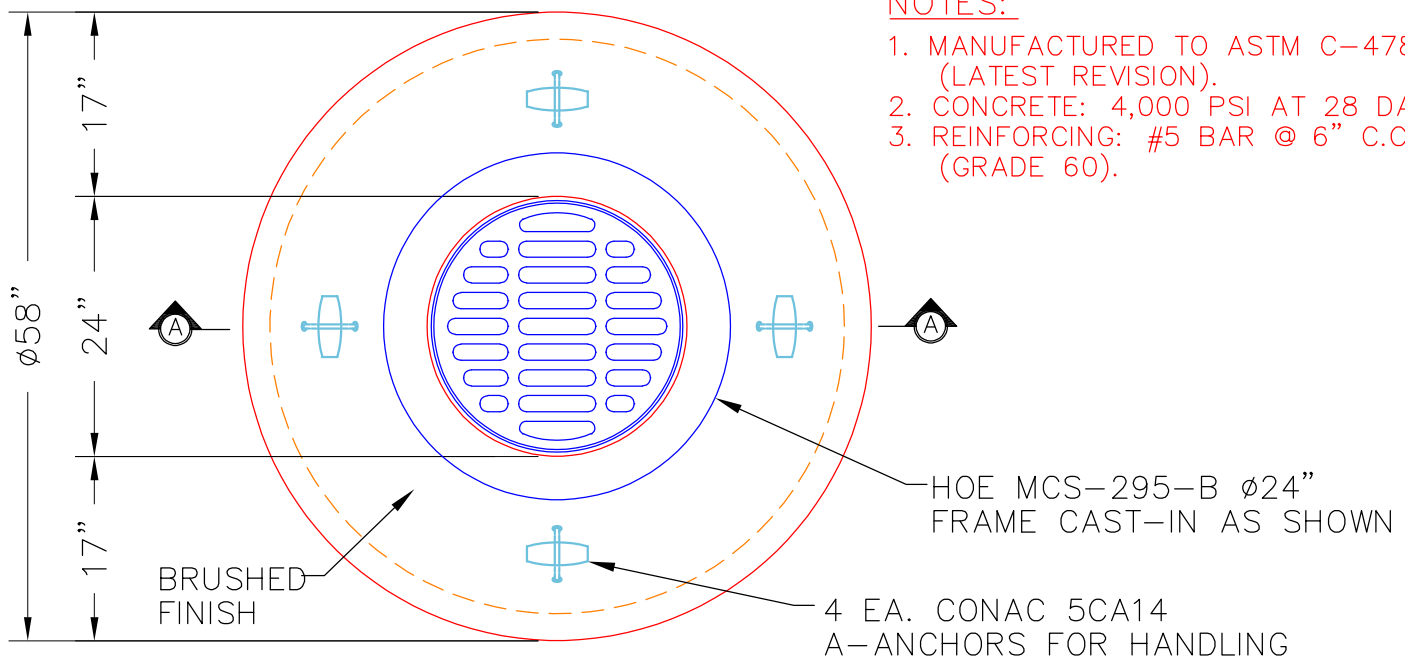

PLAN VIEW

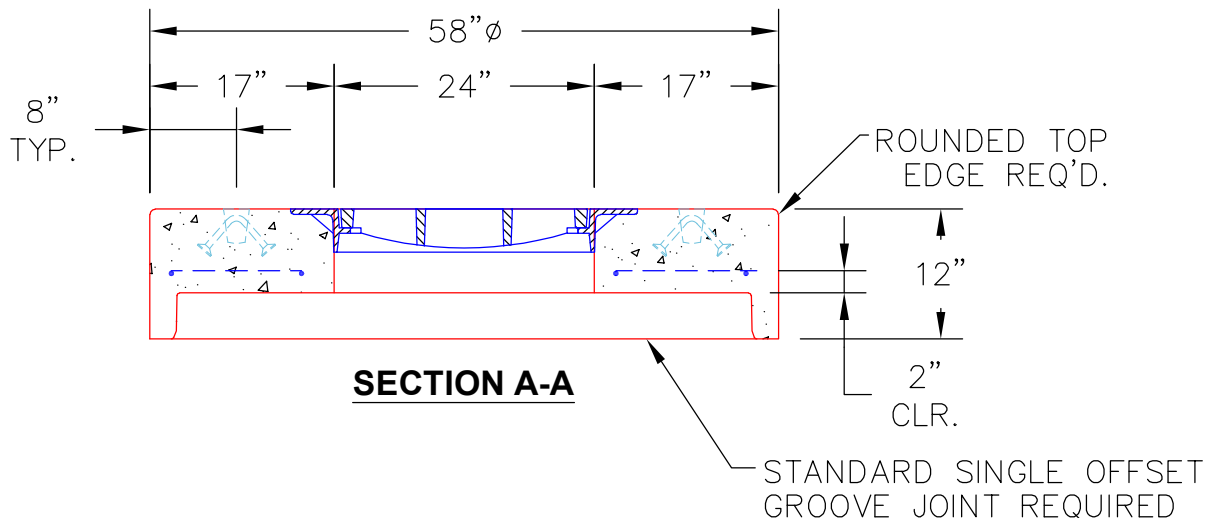

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1593 lb
Volume (Net): 0.41cu.yd