


Structure Notes: 1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. REINFORCING PER ASTM A615 (GRADE 60).
- AS SHOWN BELOW

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	0'							
Reducer								
Invert 1								
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

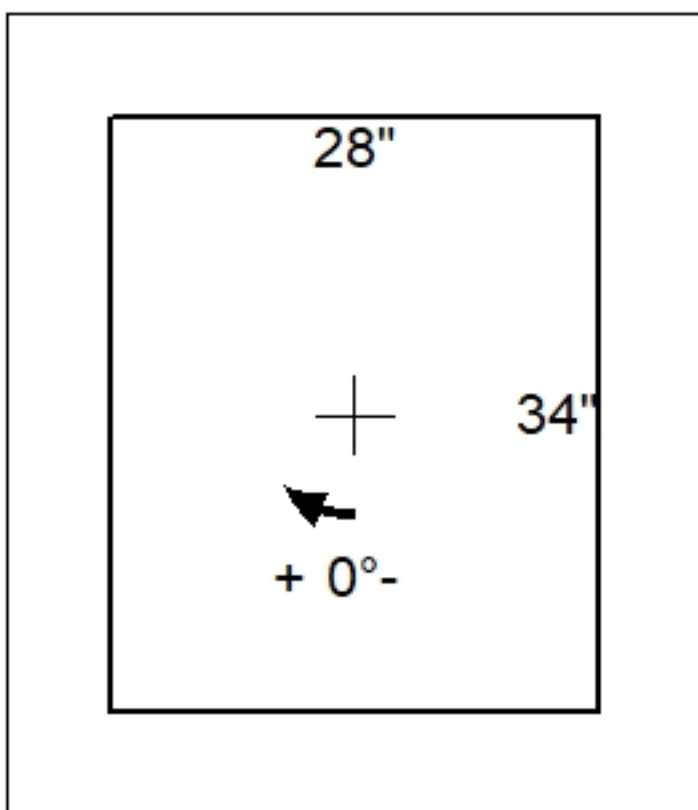

	28" x 34" - GRADE RING - 6" - (P13)
	28" x 34" - GRADE RING - 6" - (P12)
	28" x 34" - GRADE RING - 6" - (P11)
	28" x 34" - GRADE RING - 6" - (P10)
	28" x 34" - GRADE RING - 6" - (P9)
	28" x 34" - GRADE RING - 6" - (P8)
	28" x 34" - GRADE RING - 6" - (P7)
	28" x 34" - GRADE RING - 6" - (P6)
	28" x 34" - GRADE RING - 6" - (P5)
	28" x 34" - GRADE RING - 6" - (P4)
	28" x 34" - GRADE RING - 6" - (P3)
	28" x 34" - GRADE RING - 6" - (P2)
	28" x 34" - GRADE RING - 6" - (P1)

Default - Interior Dimensions



(P1)

Front	Right	Back	Left

EXT 6"

Submittal Drawing 8/10/2026 11:21:17 AM	SUBMITTAL APPROVED BY:
--	---------------------------