




P5) 24" x 120" - CASTING (cast in) - 3" P4) 24" x 120" - CB MED BAR BOX INLET 9B1 LH - 17" P3) 48" x 48" - CB FT REDUCER 24"X36" HOLE-FT - 8" P2) 48" x 48" - BOX RISER 8inW, Variable Ht - 18" P1) 48" x 48" - BOX BASE 8inW, 8inF, Variable Ht - 46" 2) 48" x 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 40 1) Hole - 28					0 lb 4000 lb 2170 lb 2707 lb 7512 lb 0 lb 0 lb 0 lb ----- Structure Total: 16388 lb	Structure Notes: . -KYTC STATE PROJECT 251007 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.) -CASTING FRAMES & GRATES BY OTHERS. -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST). -KYTC CERTIFICATIONS REQUIRED.
Rim: 583.81'	Rim to Invert: 7.8'	Slack: 4.6"	Sump: 0"	Step Position:		

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

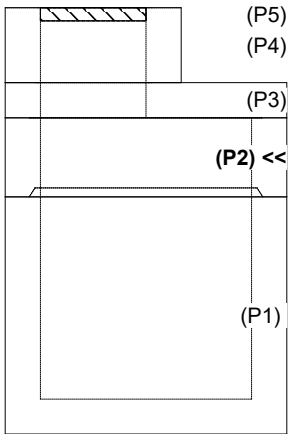

INSIDE WALL DIMENSIONS



Coating (Int):	Seam Up: Flat	Wall Thickness: 8"	Height (Int): 18"	Weight (Net): 2707 lb
Coating (Ext):	Seam Dn: Groove	Floor Height: 0"	Height (Ext): 18"	Volume (Net): 0.69cu.yd