

Job Name: 25-1965 ACEE'S MARKET & DELI
 Job Location: Fulton, KY
 Contractor: Rinker Underground

Plant: Beaver Dam

Tech: J. Coppage

12/2/2025 7:53:20 AM

PC: J. Jarvis



Structure ID: ST 6

P1 BX2460-08BAVF

BOX BASE 8inW, 8inF, Variable Ht

- P2) 24" x 60" - CB INLET KY A 5' TOP LEFT - 10"
- P1) 24" x 60" - BOX BASE 8inW, 8inF, Variable Ht - 29"
- 1) CASTING - HOE KY-206 F/C (KY TY1)
- 1) 24" x 60" - Conseal CS-102 1.00"
- 1) SQ. Hole - 18"x18"
- 1) SQ. Hole - 24"x24"
- 1) Horiz Slot - 60"x8"

- 1895 lb
5055 lb
206 lb
0 lb
0 lb
0 lb


Structure Total: 7156 lb
- Structure Notes:**
1. PER KYTC CBI TYPE A 5' (MOD) / ASTM C913 SPEC'S
 2. CONCRETE = 4,000 PI AT 28 DAYS
 3. REINFORCING PER ASTM A615 (GRADE 60)
 - TOP PHASE TOP (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS & FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
 4. HOE KY-206 PROVIDED BY ICAST
 5. #5 BAR @ 12" C.C. TO BE STUBBED OUT OF 8" DEEP THROAT (INVERT 3) FOR GUTTER POUR TIE-IN

FIRST POUR DRAWING

Rim: 411.7' Rim to Invert: 3' Slack: -3" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	408.7'	330°	15.381"	12" RCP B WALL	16"	SQ. Hole 18"x18"	18" x 18"	20.785"	-3"	15"
Invert 2	408.7'	90°	38"	18" RCP B WALL	23"	SQ. Hole 24"x24"	24" x 24"	24"	-3"	0"
Invert 3	410.45'	90°	38"	60" x 8" Horiz Slot	60" x 8"	Horiz Slot 60"x8"	60" x 8"	60"	21"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

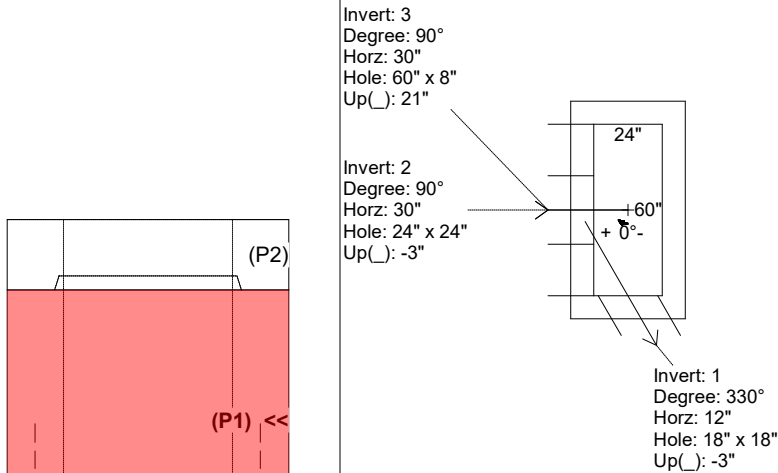


WEIGHTS:

FIRST POUR - 2,041 LBS.


SECOND POUR - 3,014 LBS.

TOTAL - 5,055 LBS.



14" X 14" #5 BAR
@ 12" ON CENTER
TIED INTO THE MAT

INSIDE WALL DIMENSIONS

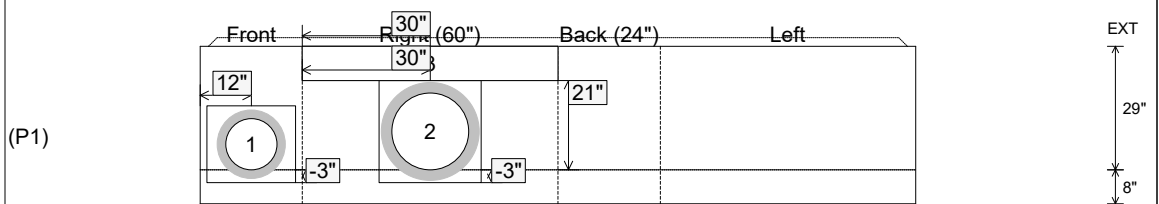

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 29"
Height (Ext): 37"

Weight (Net): 5055 lb
Volume (Net): 1.29cu.yd

Job Name: 25-1965 ACEE'S MARKET & DELI
 Job Location: Fulton, KY
 Contractor: Rinker Underground

Plant: Beaver Dam

12/2/2025 7:53:20 AM

Tech: J. Coppage

PC: J. Jarvis



Structure ID: ST 6

P1 BX2460-08BAVF

BOX BASE 8inW, 8inF, Variable Ht

- P2) 24" x 60" - CB INLET KY A 5' TOP LEFT - 10"
- P1) 24" x 60" - BOX BASE 8inW, 8inF, Variable Ht - 29"
- 1) CASTING - HOE KY-206 F/C (KY TY1)
- 1) 24" x 60" - Conseal CS-102 1.00"
- 1) SQ. Hole - 18"x18"
- 1) SQ. Hole - 24"x24"
- 1) Horiz Slot - 60"x8"

- Structure Notes:
1. PER KYTC CBI TYPE A 5' (MOD) / ASTM C913 SPEC'S
 2. CONCRETE = 4,000 PI AT 28 DAYS
 3. REINFORCING PER ASTM A615 (GRADE 60)
 - TOP PHASE TOP (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS & FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
 4. HOE KY-206 PROVIDED BY ICAST
 5. #5 BAR @ 12" C.C. TO BE STUBBED OUT OF 8" DEEP THROAT (INVERT 3) FOR GUTTER POUR TIE-IN


Structure Total: 7156 lb

SECOND POUR DRAWING

Rim: 411.7' Rim to Invert: 3' Slack: -3" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	408.7'	330°	15.381"	12" RCP B WALL	16"	SQ. Hole 18"x18"	18" x 18"	20.785"	-3"	15"
Invert 2	408.7'	90°	38"	18" RCP B WALL	23"	SQ. Hole 24"x24"	24" x 24"	24"	-3"	0"
Invert 3	410.45'	90°	38"	60" x 8" Horiz Slot	60" x 8"	Horiz Slot 60"x8"	60" x 8"	60"	21"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

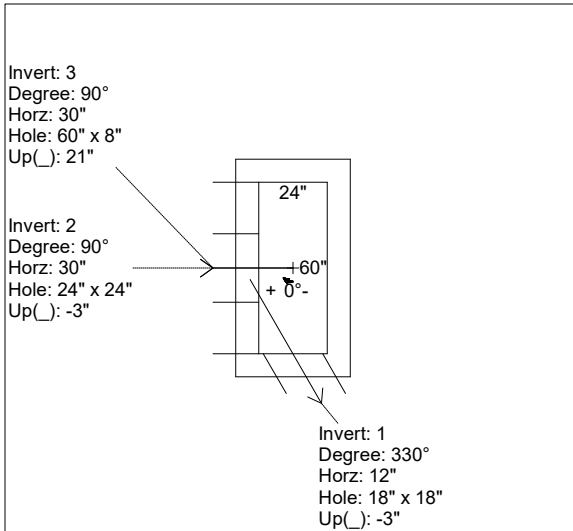


WEIGHTS:

FIRST POUR - 2,041 LBS.


SECOND POUR - 3,014 LBS.

TOTAL - 5,055 LBS.



14" X 14" #5 BAR
 @ 12" ON CENTER
 TIED INTO THE MAT

INSIDE WALL DIMENSIONS

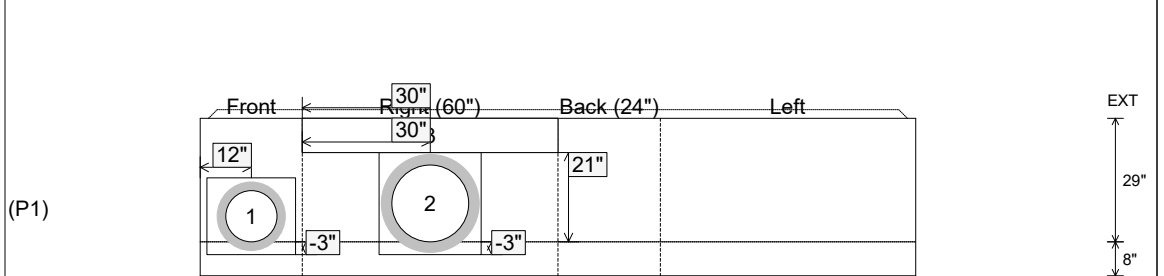

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 29" Height (Ext): 37"	Weight (Net): 5055 lb Volume (Net): 1.29cu.yd
----------------------------------	---------------------------------	--	--	--