



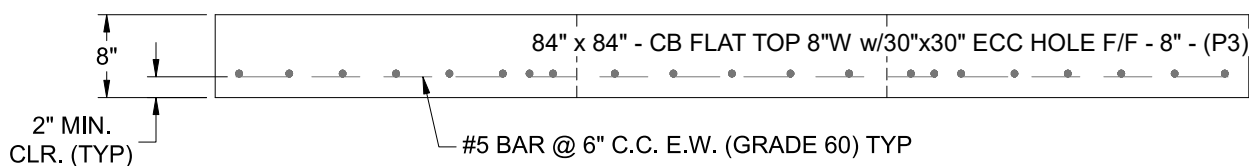

CB FLAT TOP 8"W w/30"x30" ECC HOLE F/F

1. PER ASTM C-913 SPECIFICATIONS
2. CONCRETE: 4,500 PSI AT 28 DAYS
3. REINFORCEMENT: #5 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 - ADDITIONAL #5 BAR @ 3" C.C. E.W. (GRADE 60) AROUND 30" X 30" OPENING REQUIRED
4. HOE 468 FRAME & GRATE SUPPLIED BY ICAST
5. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING
6. TOP SURFACE TO RECEIVE FLOATED FINISH

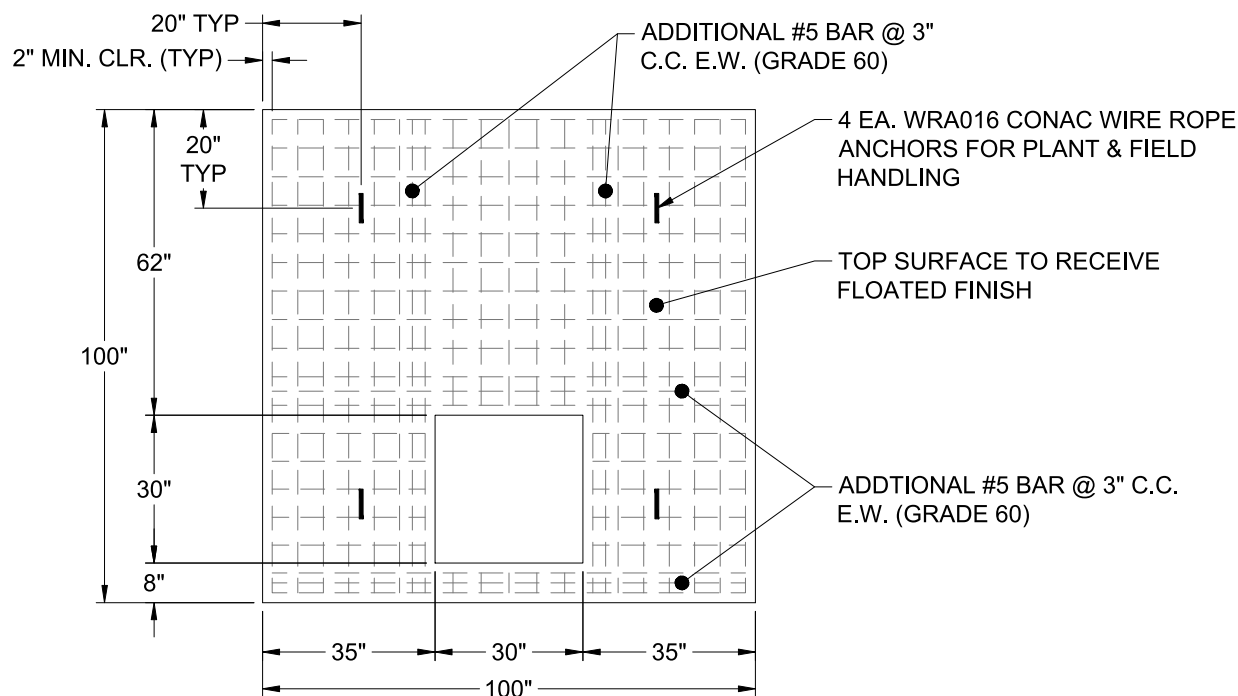

Weight (Net): 6109 lb
Volume (Net): 1.56cu.yd