

Job Name: 26-1800 - Georgetown Community Park
Job Location: Georgetown, IN
Contractor: Song Construction

Plant: 100

7/24/2026 12:15:58 PM

Tech: Jared - A

PC: Jay Ross Jarvis



Structure ID: MH 1 ST-MH DH

P1 MH072MTVF-FB

MH MONOTOP (FB) w/24" Hole, Custom Ht


- P2) 24" - CASTING HEIGHT - 7"
P1) 72" - MH MONOTOP (FB) w/24" Hole, Custom Ht - 54"
1) CASTING - HOE MC-375 F/C Storm
1) 24" - Conseal CS-102 1.00"
2) DOGHOUSE - 52"x52"
1) DOGHOUSE - 18"x22"
5) MH Step ML-10-TDS-NCR - 10"

Structure Total: 7206 lb

- 0 lb
6935 lb
271 lb
0 lb
0 lb
0 lb
0 lb
0 lb
- Structure Notes:**
1. HOE MC-375 F/C STORM PROVIDED BY ICAST.
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER (As .18)

Rim: 697.51' Rim to Invert: 5.01' Slack: 0.37" Sump: 0" Step Position: 173°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	692.5'	263°	197.379"	48" CMP	49"	DOGHOUSE 52"x52"	52" x 52"	58.105"	0"	0"
Invert 2	692.5'	0°	0"	12" HDPE	14.5"	DOGHOUSE 18"x22"	18" x 22"	18.193"	0"	0"
Invert 3	692.5'	83°	62.291"	48" CMP	49"	DOGHOUSE 52"x52"	52" x 52"	58.105"	0"	0"

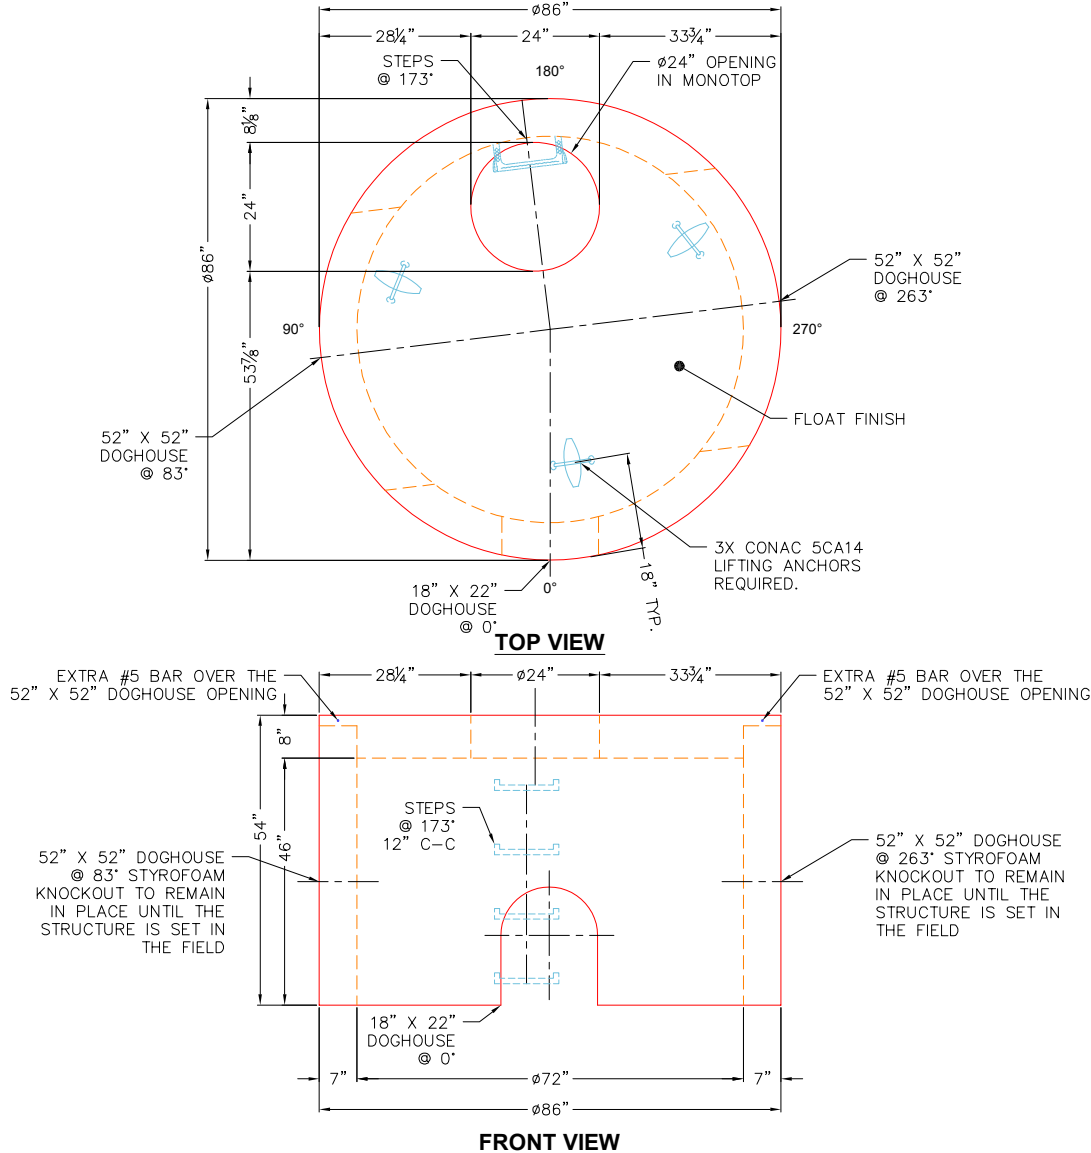

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 7"
Floor Height: 8"

Height (Int): 46"
Height (Ext): 54"

Weight (Net): 6935 lb
Volume (Net): 1.77cu.yd