

Structure ID: QL19

P13 GR28x28x6x6

GRADE RING 6"W F/F

411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb
411 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.


REINFORCING PER ASTM A615 (GRADE 60).

- WALLS (As. 31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE = 4,000 PSI @ 28 DAYS.
3. REINFORCING: #4 BAR AS SHOWN (GRADE 60 KSI).
4. LIFTS: 2 EA. CONAC .8 TON WIRE ROPE ANCHORS REQUIRED.

Structure Total: 9449 lb

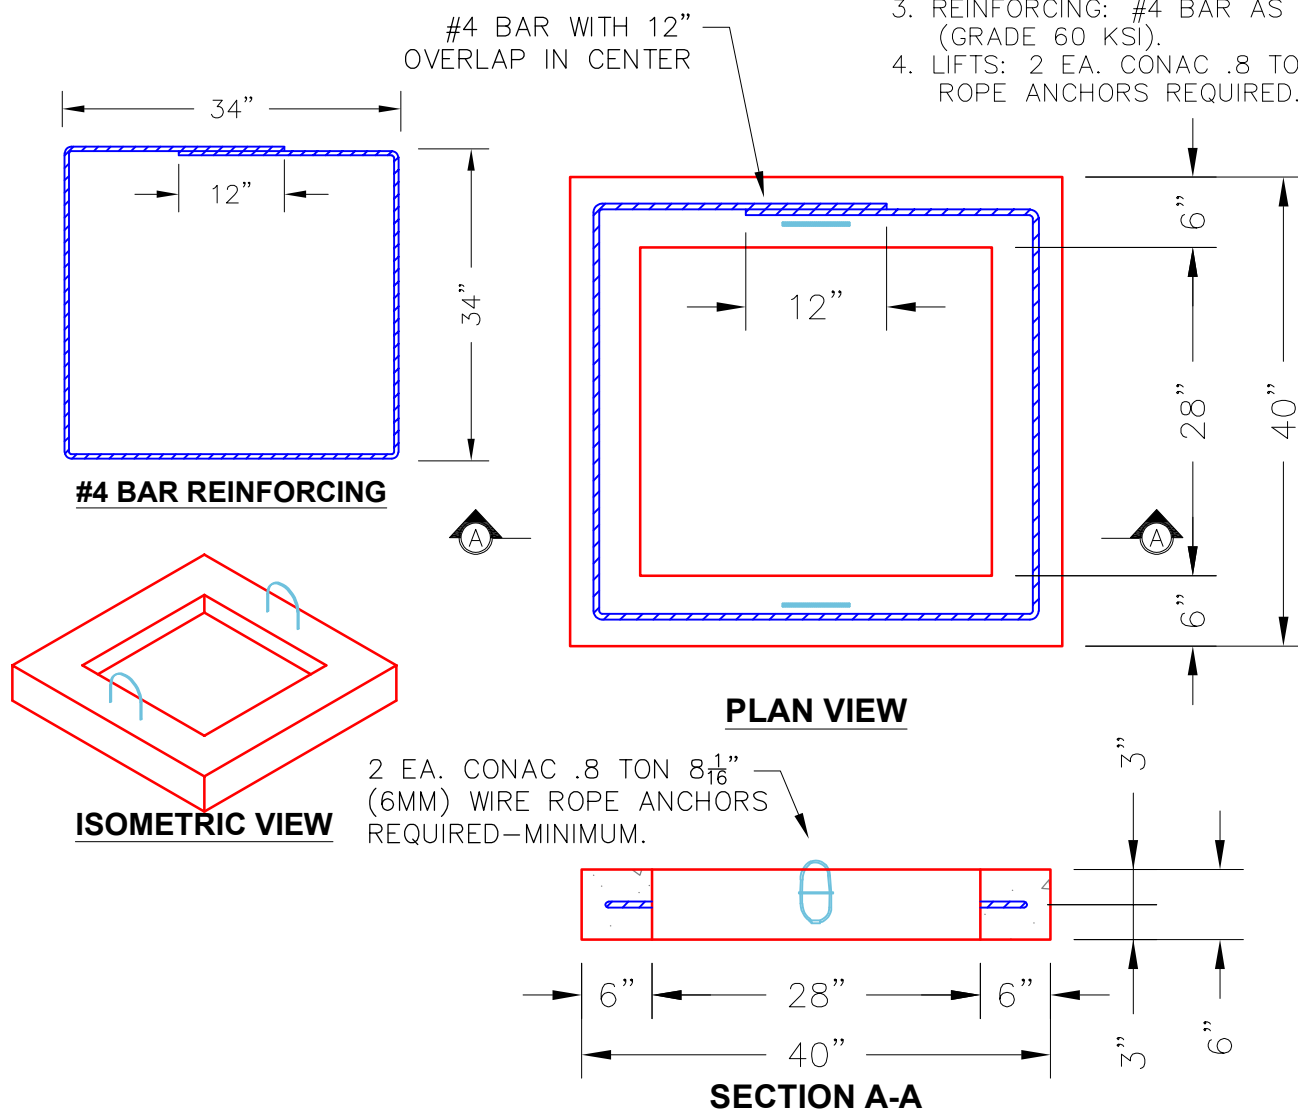

Weight (Net): 411 lb
Volume (Net): 0.1cu.yd