



Weight (Net): 4822 lb
Volume (Net): 1.23cu.yd

Job Name: 25-1401 Irwin Landing Ph. 1 Job Location: Murfreesboro, TN Contractor: Bear Construction LLC					Plant: Beaver Dam 6/9/2026 10:37:06 AM		Tech: S. Felletter PC: Erica Bradley				
Structure ID: R18											
P1 MH048BA60		MH BASE T/n									
P4) 28" x 28" - CASTING HEIGHT - 5" P3) 28" x 28" - GRADE RING F/F - 3" P2) 48" - MH FLAT TOP w/28"x28" Hole F/G - 12" P1) 48" - MH BASE T/n - 60" 1) 48" - STORM INVERT CHANNEL - 1/4 HEIGHT 1) CASTING - JBS 3104-V SINGLE SET 1) 48" - Conseal CS-102 1.00" 2) 28" x 28" - Conseal CS-102 1.00" 3) Hole - 26" 5) MH Step ML-10-TDS-NCR - 10"						0 lb 290 lb 1368 lb 4822 lb 1075 lb 250 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (JBS-3104 SINGLE SET). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Structure Total: 7805 lb						Invert channel drawing 1/4 Height storm invert					
Rim: 578.27' Rim to Invert: 6.46' Slack: 0.02" Sump: 2.5" Step Position: 270°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	571.81'	0°	0"	18" RCP B WALL	23"	Hole 26	26"	27.476"	0"	0"	
Invert 2	573.5'	90°	45.553"	18" RCP B WALL	23"	Hole 26	26"	27.476"	20.28"	0"	
Invert 3	571.81'	180°	91.106"	18" RCP B WALL	23"	Hole 26	26"	27.476"	0"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

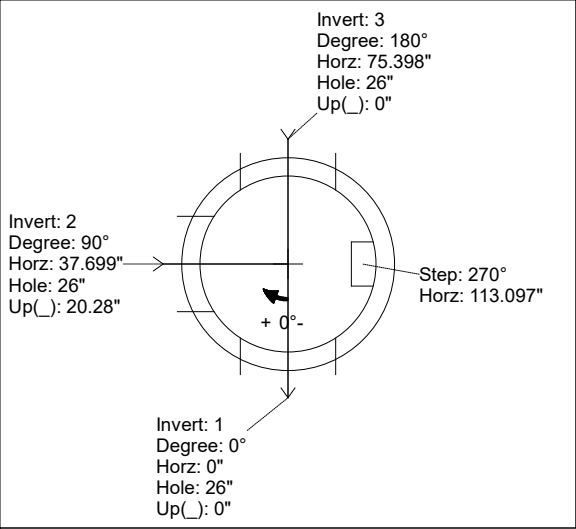

UPSIDE-DOWN VIEW (int. dimensions)

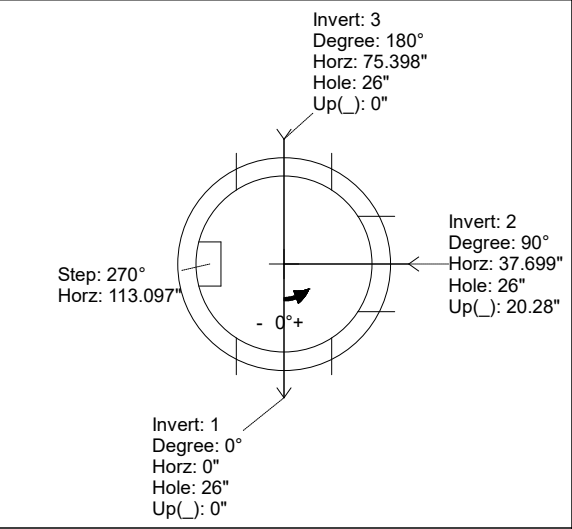

INSIDE WALL DIMENSIONS

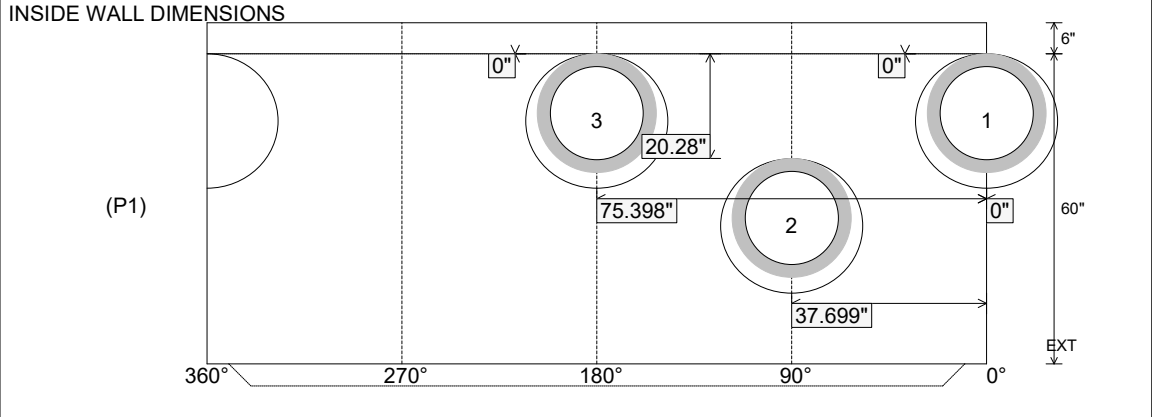

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 60" Height (Ext): 66"	Weight (Net): 4822 lb Volume (Net): 1.23cu.yd
----------------------------------	---------------------------------	--	--	--