


Plant: Beaver Dam

7/21/2026 8:50:21 AM

Tech:	S. Felletter
PC:	A. Chambers



GRADE RING 6"W F/F

[illegible]

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.

REINFORCING PER ASTM A615 (GRADE 60).


- WALLS (As .31) #5 BARS AT 12" C.C.E.W.

411 lb
411 lb
411 lb
411 lb
411 lb

Structure Total: 9449 lb

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE = 4,000 PSI @ 28 DAYS.
3. REINFORCING: #4 BAR AS SHOWN (GRADE 60 KSI).
4. LIFTS: 2 EA. CONAC .8 TON WIRE ROPE ANCHORS REQUIRED.

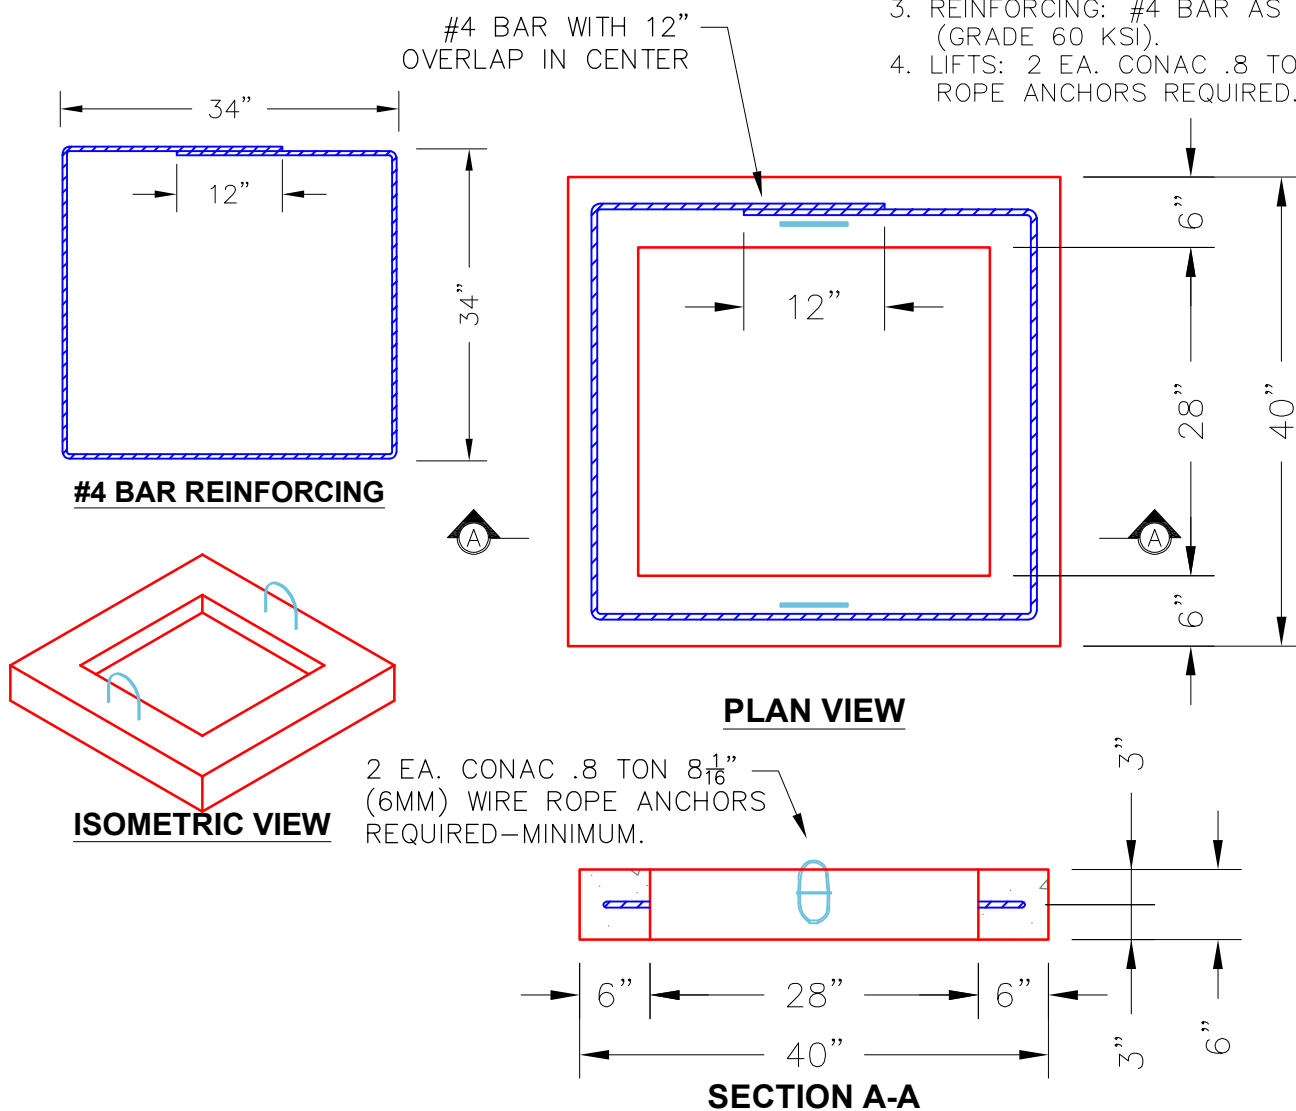

Weight (Net): 411 lb
Volume (Net): 0.1cu.yd