



Job Name: 25-1401 Irwin Landing Ph. 1 Job Location: Murfreesboro, TN Contractor: Bear Construction LLC					Plant: Beaver Dam 6/9/2026 10:46:25 AM		Tech: S. Felletter PC: Erica Bradley				
Structure ID: R53											
P2		MH048RSVF		MH RISER Custom Ht F/G							
P3) 48" - MH FLAT TOP - TDOT D-RJB-1 (SOLID) F/F - 8" P2) 48" - MH RISER Custom Ht F/G - 44" P1) 48" - MH BASE Custom Ht T/n - 34" 1) 48" - STORM INVERT CHANNEL - 1/4 HEIGHT 2) 48" - Conseal CS-102 1.00" 3) Hole - 26					1774 lb 2841 lb 3239 lb 1075 lb 0 lb 0 lb ----- Structure Total: 8928 lb		Structure Notes: 1. PER TDOT D-RJB-1 / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. REINFORCING PER ASTM A615 (GRADE 60). ** SEE TDOT STD DRAWING D-RJB-1 ** - TOP SLAB (As .42) #5 BARS AT 10" C.C.E.W. - WALLS (As .47) #5 BARS AT 8" C.C.E.W. - FLOOR (As .47) #5 BARS AT 8" C.C.E.W.				
Rim: 568.97' Rim to Invert: 8.21' Slack: 15.02" Sump: 2.5" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3	564.34'	242°	122.487"	18" RCP B WALL	23"	Hole 26	26"	27.476"	4.71"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

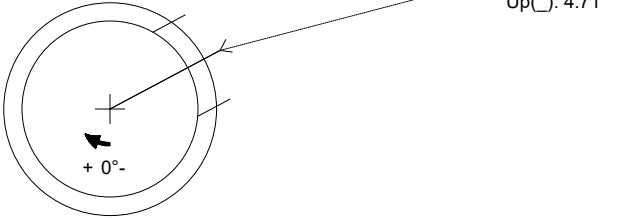

INSIDE WALL DIMENSIONS

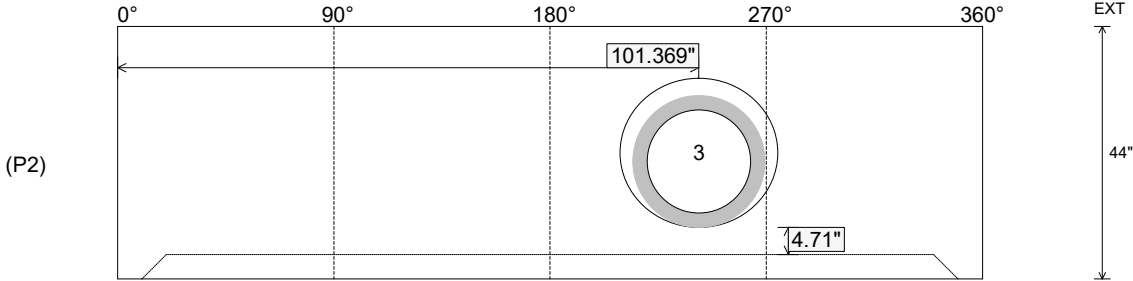

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 44" Height (Ext): 44"	Weight (Net): 2841 lb Volume (Net): 0.73cu.yd
----------------------------------	----------------------------------	--	--	--