

Job Name: 25-2397 Sandy Springs Sec. 2
Job Location: Elizabethtown, KY 42701
Contractor: Dirt Works Unlimited, LLC.

Plant: 100

7/9/2026 2:52:14 PM

Tech: Jared - A

PC: Thomas Ryan



Structure ID: O

P2 MH072LD08S

MH FLAT TOP SPEC. HT. (8") w/24" ECC Hole



- P3) 24" - CASTING HEIGHT - 4"
P2) 72" - MH FLAT TOP SPEC. HT. (8") w/24" ECC Hole - 8"
P1) 72" - MH BASE - 54"
1) CASTING - HOE MC-285 F/C Storm
1) 72" - Conseal CS-102 1.00"
2) Hole - 50
1) Hole - 30
4) MH Step ML-10-TDS-NCR - 10"

0 lb	Structure Notes:
3596 lb	PLAN LABEL: O
8840 lb	1. HOE MC-285 F/C "STORM" PROVIDED BY ICAST.
284 lb	2. PER ASTM C478 SPECIFICATIONS.
0 lb	3. CONCRETE = 4,000 PSI AT 28 DAYS.
0 lb	4. REINFORCING PER ASTM A615 (GRADE 60).
0 lb	- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
0 lb	- RISER/WALLS (As .18)
12719 lb	- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

Structure Total:

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615 (GRADE 60)
- AS SHOWN BELOW.

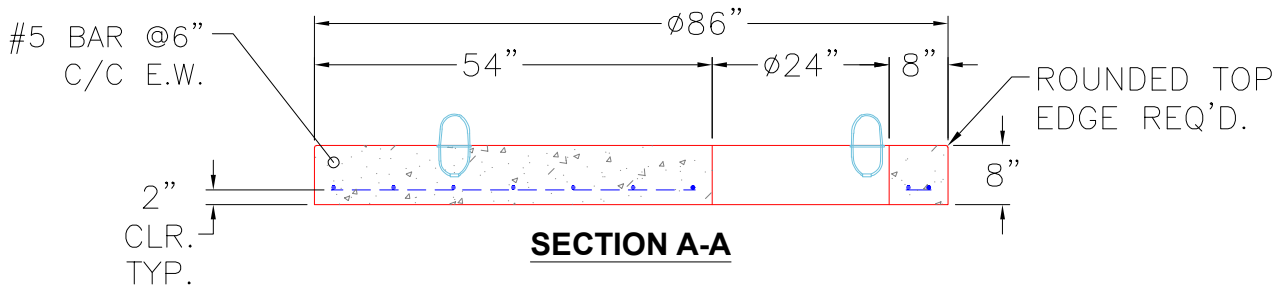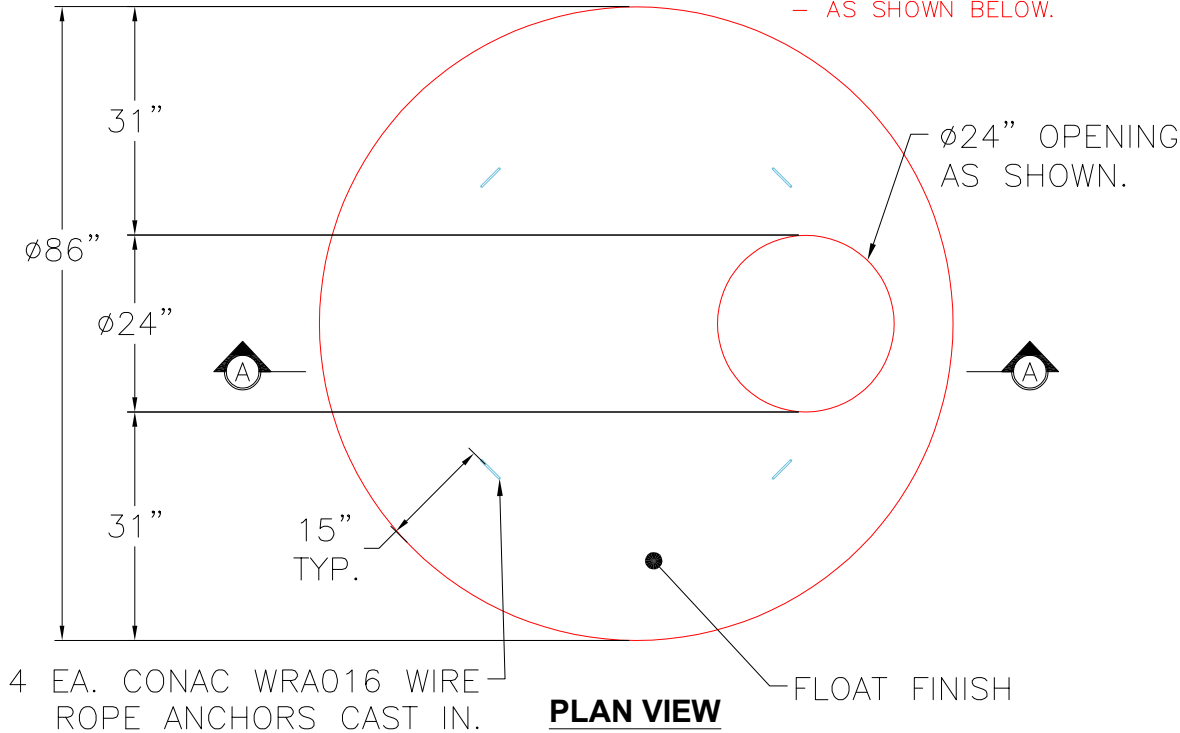

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 7"

Height (Ext): 8"

Weight (Net): 3596 lb
Volume (Net): 0.92cu.yd