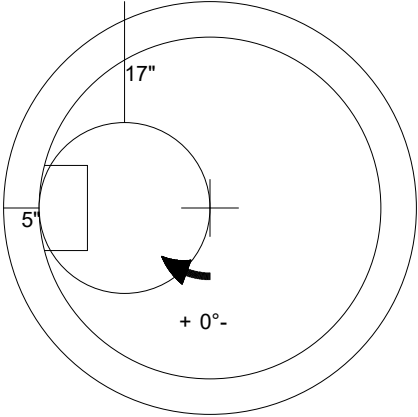
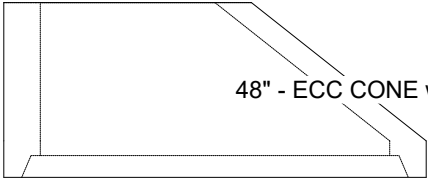


Job Name: 25-2471 - Texas Roadhouse Job Location: Danville, KY Contractor: McCain Bros Excavating LLC		Plant: 100 6/12/2026 3:42:21 PM	Tech: Jared - F PC: M. Sullivan		
Structure ID: 1					
P5 MH048CN24		ECC CONE w/ 24" HOLE F/G			
P7) 24" - CASTING HEIGHT - 7" P6) 24" - GRADE RING F/F - 4" P5) 48" - ECC CONE w/ 24" HOLE F/G - 24" P4) 48" - MH RISER T/G - 24" P3) 60" - MH Transition Slab 48" Hole T/G - 13" P2) 60" - MH RISER T/F - 72" P1) 60" - P.I.P. BY OTHERS - BTM SLAB F/n - 0" 2) 60" - Conseal CS-202 1.00" 2) 48" - Conseal CS-202 1.00" 2) DOGHOUSE - 40"x42" 1) Hole - 30 10) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 1550 lb 1677 lb 1928 lb 5413 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 10838 lb	Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. (7" TALL CASTING BY OTHERS) . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12). - RISER/WALLS (As .12) - TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .18)		
					
 48" - ECC CONE w/ 24" HOLE F/G - 24" - (P5)					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd