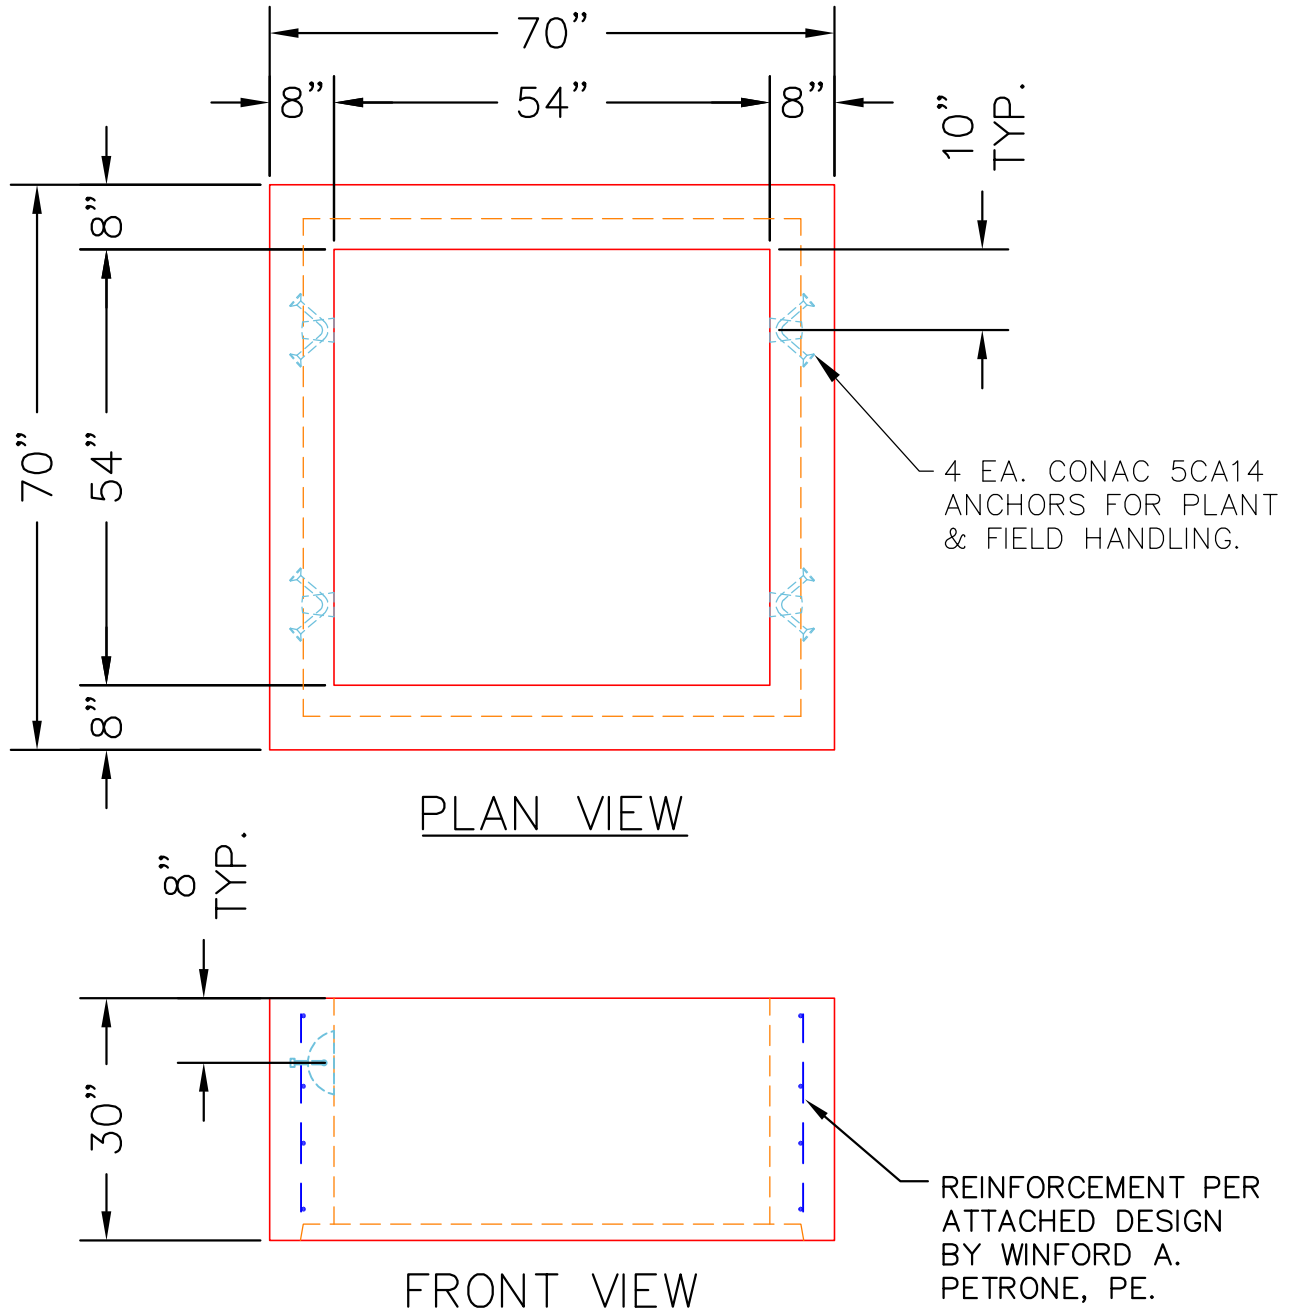


STRUCTURE NOTES:

1. MANUFACTURED PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 5,000 PSI AT 28 DAYS.
3. JOINT SEALANT - CONSEAL CS-231.
4. EXTERIOR JOINT WRAP - CONSEAL CS-212 & CS-75.
5. REINFORCING PER ASTM A615 (GRADE 60) EPOXY COATED. SEE ATTACHED DESIGN BY WINFORD A. PETRONE, PE.

**PRODUCTION WORK ORDER**

PRODUCT I.D.:
BX5454-08RVF

DESCRIPTION: 54" X 54" X 30" TALL BOX RISER

**QUALITY CONTROL CHECKLIST**

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED INSIDE.
- ☐ RECESS WITH HAUNCHES CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ LIFTERS INSTALLED OUTSIDE.
- ☐ PRODUCT SQUARE.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 4,994 LBS.

TOP JOINT: FLAT

BOTTOM JOINT: GROOVE

QC CHECK INITIALS:

CUSTOMER: CLEARY CONSTRUCTION INC

PROJECT: UK BP9 SITE THERMAL AND ELECTRIC UTILITIES

STRUCTURE: VAULT 3

SALES ORDER/QUOTE NO: 25-2504

PC: C. GOFF

DRAWING: S. FELLETTER

DATE: 07/31/26



SCALE: NTS

PG.

1 of 1

NOTE: SEE "PRECAST DESIGN SUBMITTALS, CONCRETE COMPONENTS" SHEET FOR SUMMARY OF BUILDING AND DESIGN CODES, MATERIALS REQUIREMENTS, AND DESIGN LOADS.

NOTE: SEE ICAST WORKING DRAWINGS FOR ADDITIONAL INFORMATION AND LOCATION OF EACH COMPONENT.

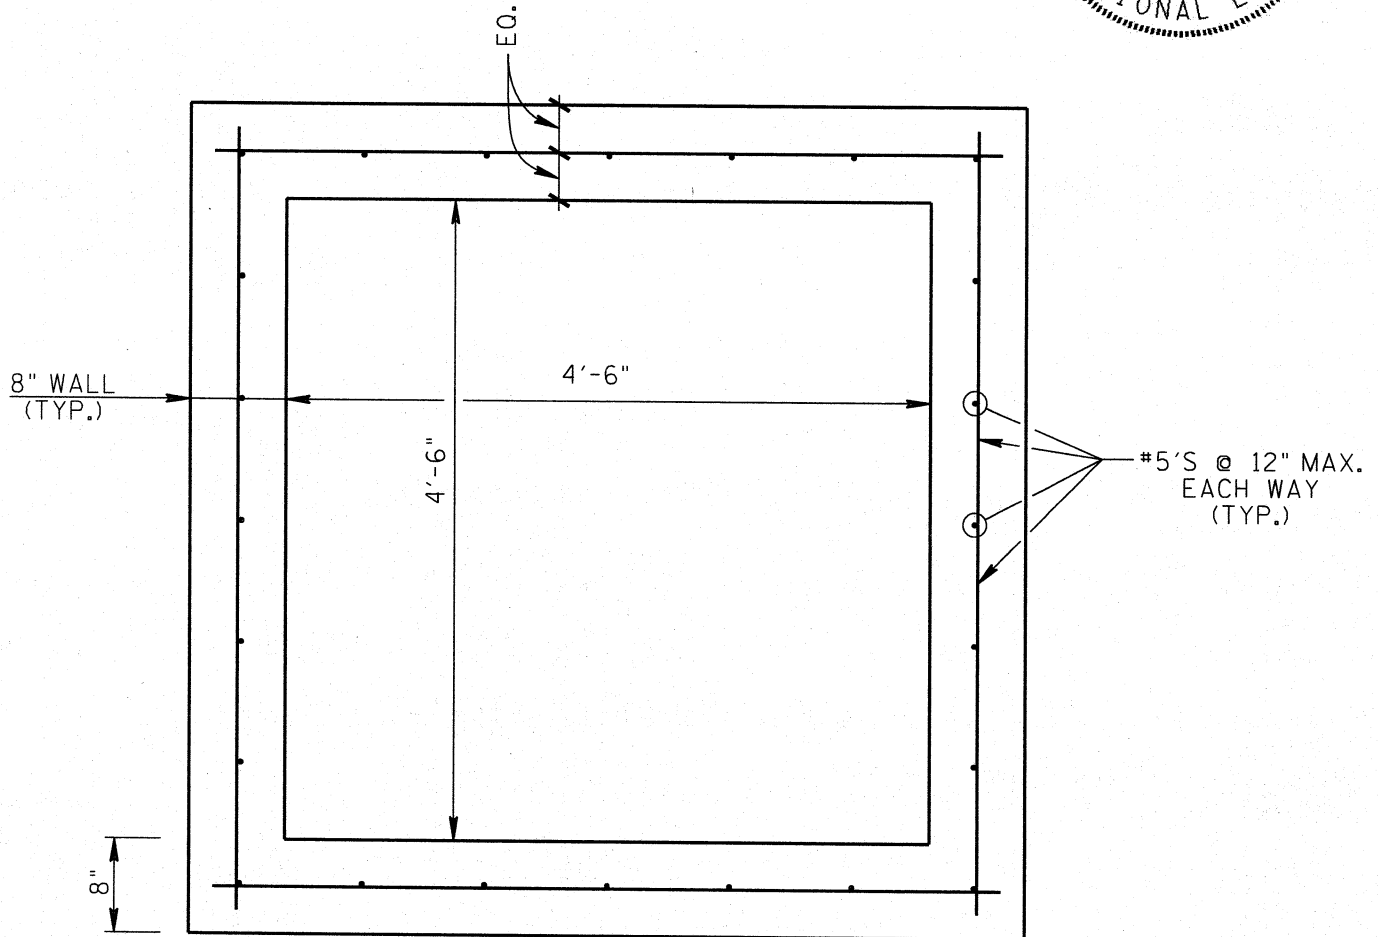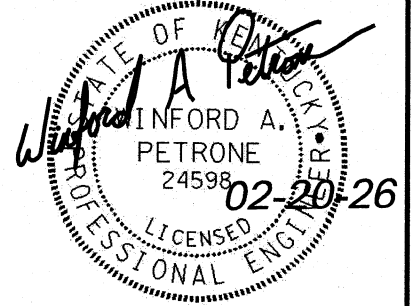

TYPICAL WALL SECTION
54"X54" RISER: SHOWING REINFORCEMENT

SK-3

VAULT 3: 54"X54" RISER, WALL SECTION
UK BP9 SITE THERMAL AND ELECTRIC