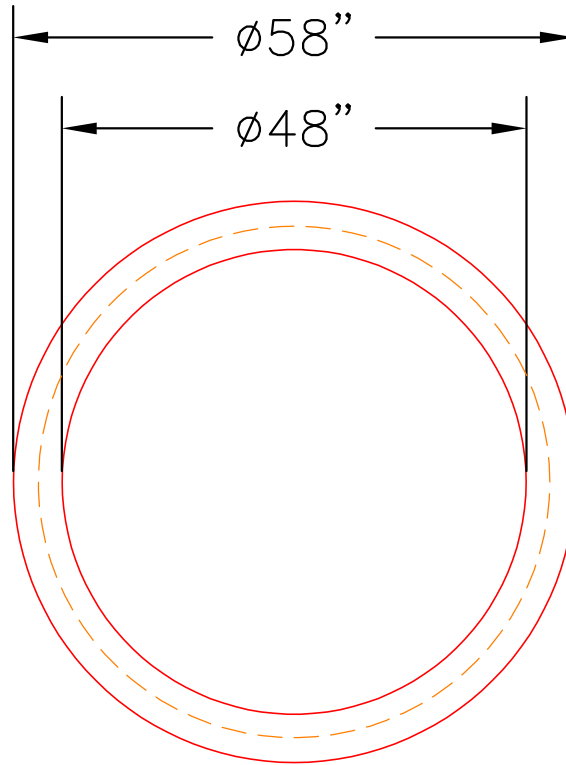


STRUCTURE NOTES:

1. MANUFACTURED PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 5,000 PSI AT 28 DAYS.
3. JOINT SEALANT – CONSEAL CS-231.
4. EXTERIOR JOINT WRAP – CONSEAL CS-212 & CS-75.
5. REINFORCING PER ASTM C-478/ASTM A615.
6. USE STANDARD 48" DIA. MANHOLE LIFTER SYSTEM.

PLAN VIEWFRONT VIEW

PRODUCTION WORK ORDER		PRODUCT I.D.: MH048RS24	DESCRIPTION: ø48" MH RISER NO TONGUE	
	QUALITY CONTROL CHECKLIST ☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED INSIDE. ☐ RECESS WITH HAUNCHES CORRECT. ☐ REINFORCING CORRECT. ☐ SURFACE QUALITY ACCEPTABLE. ☐ LIFTERS INSTALLED OUTSIDE. ☐ PRODUCT SQUARE.	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: CLEARY CONSTRUCTION INC	
		PLANT: BEAVER DAM, KY.	PROJECT: UK BP9 SITE THERMAL AND ELECTRIC UTILITIES	
		WEIGHT: 1,677 LBS.	STRUCTURE: VAULT 3	
		TOP JOINT: FLAT	SALES ORDER/QUOTE NO: 25-2504	
		BOTTOM JOINT: GROOVE	PC: C. GOFF	DRAWING: S. FELLETER
		QC CHECK INITIALS:	DATE: 07/31/26	SCALE: NTS PG. 1 of 1