
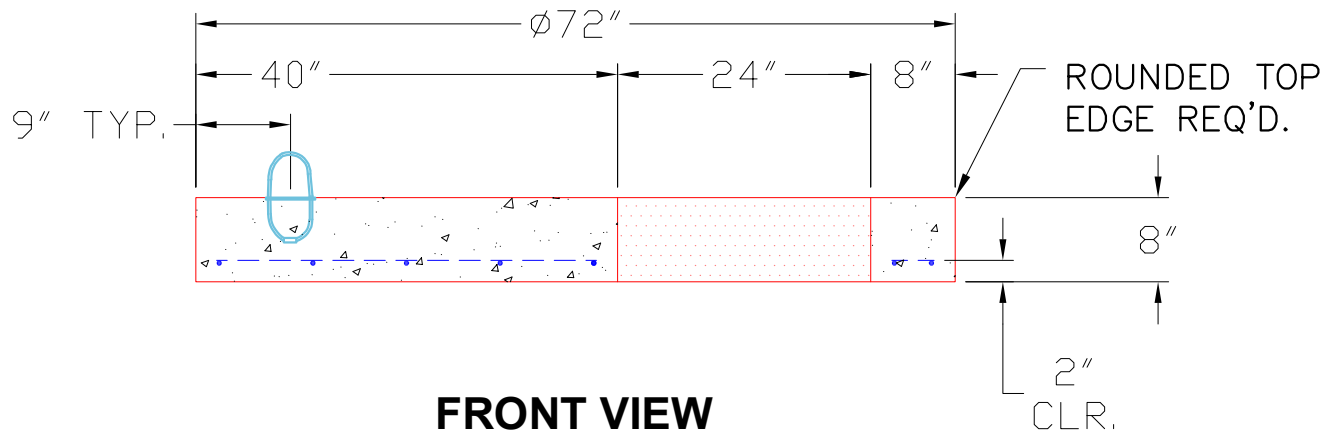



THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

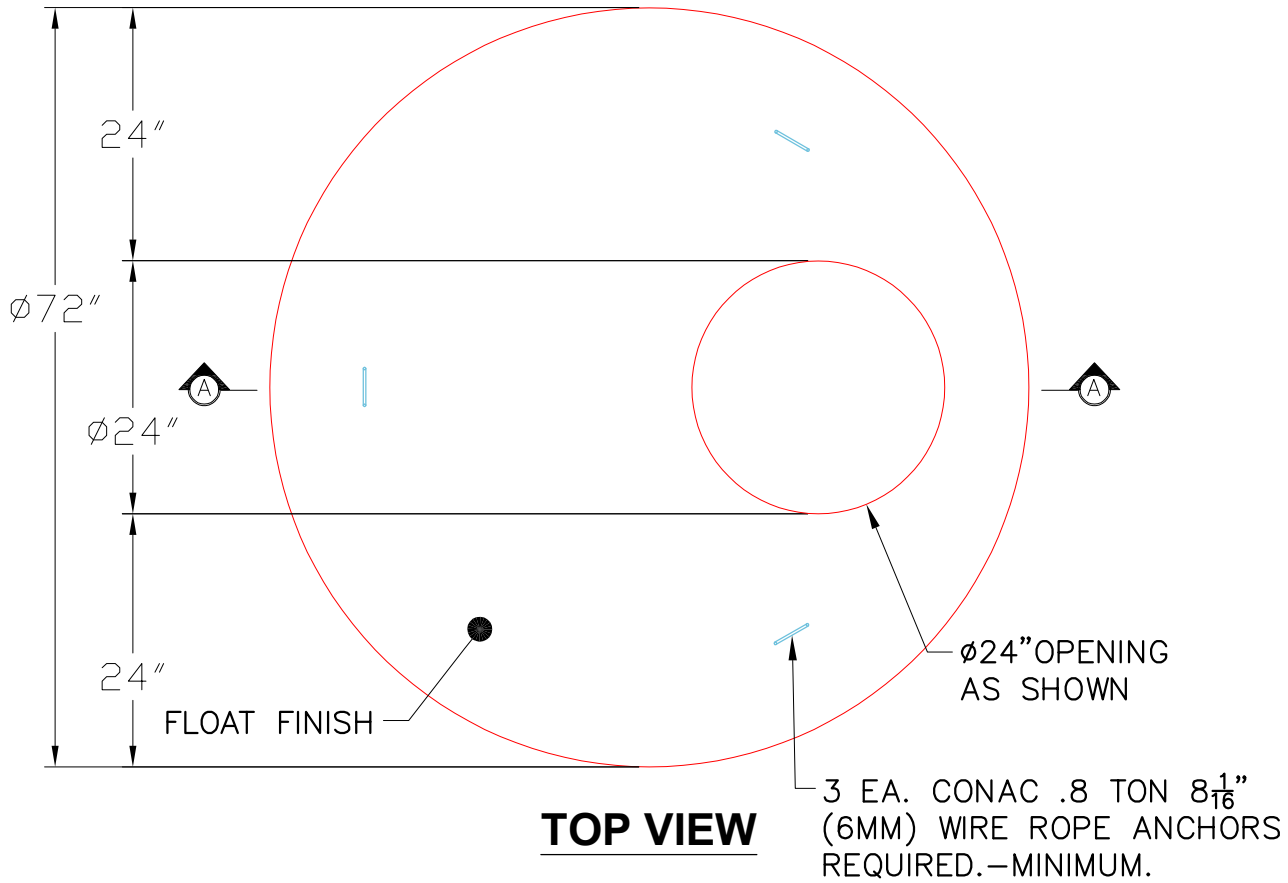

**NOTES:**

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 9" O.C. E.W. (GRADE 60).

<b>PRODUCTION WORK ORDER</b>		PRODUCT I.D.: MH060LD08	DESCRIPTION: 60"ø X 8" MH TOP SLAB ø24" ECCENTRIC OPENING	
	<b>QUALITY CONTROL CHECKLIST</b>		PRODUCT VIEW: RIGHT SIDE UP	
	<input type="checkbox"/> ALL DIMENSIONS CORRECT.		CUSTOMER: WOODALL CONSTRUCTION CO., INC.	
	<input type="checkbox"/> LIFTERS INSTALLED.		PLANT: BEAVER DAM, KY.	
	<input type="checkbox"/> HOLE LOCATION CORRECT.		PROJECT: THE MAXWELL PH 2	
	<input type="checkbox"/> REINFORCING CORRECT.		WEIGHT: 2,429 LBS.	
	<input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM.		STRUCTURE: TB4-256MH	
<input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED.		TOP SECTION JOINT: N/A		
<input type="checkbox"/> FLAT JOINT INSTALLED.		QUOTE/SALES ORDER NO: 25-2631		
		BASE SECTION JOINT: FLAT	PC: J. JARVIS	DRAWING: J. COPPAGE
		QC CHECK INITIALS:	DATE: 11/7/25	SCALE: NTS
				PG. 1 of 1