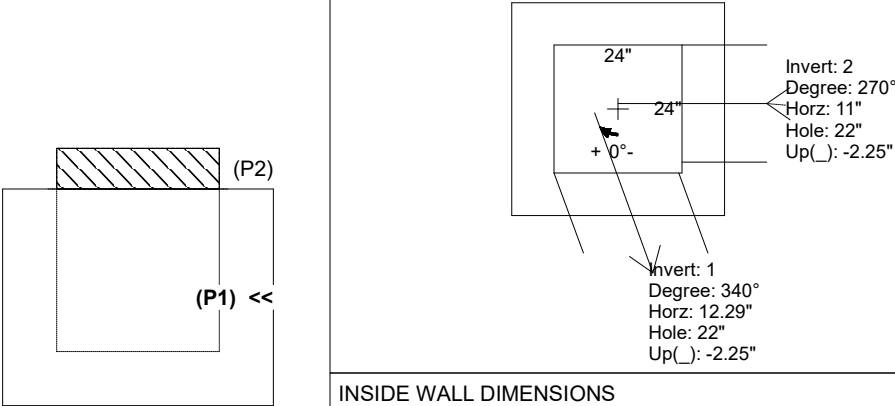
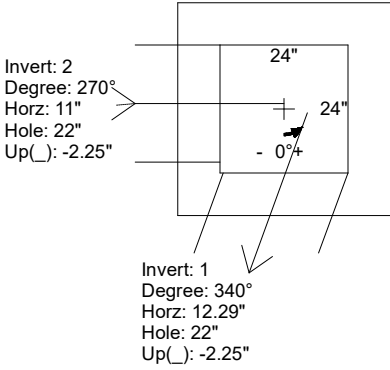
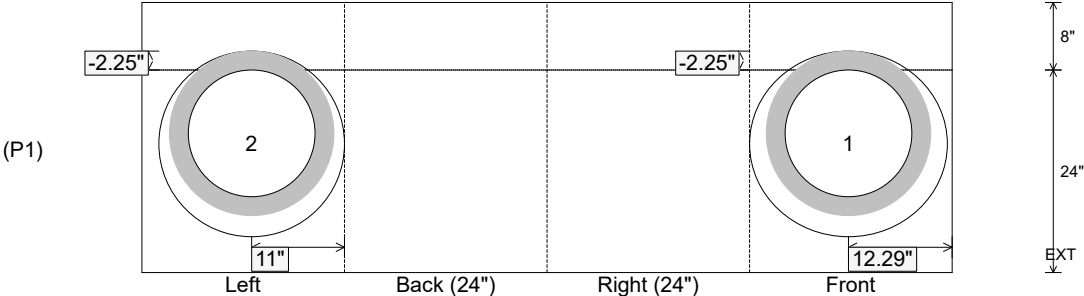


Job Name: 23-2309 - Richland Estates Subdivision Job Location: Portland, TN Contractor: Core & Main LP (BG)					Plant: 100 6/30/2026 8:52:14 AM		Tech: J. Horsley PC: T. Lewis					
Structure ID: 17 ST-SCI												
P1 BX2424-08BA24		BOX BASE 8inW, 8inF										
P2) 24" x 24" - CASTING HEIGHT - 6" P1) 24" x 24" - BOX BASE 8inW, 8inF - 24" 1) 24" x 24" - Conseal CS-102 1.00" 2) Hole - 22"					0 lb 2685 lb 0 lb 0 lb ----- Structure Total: 2685 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY OTHERS (NEENAH R-3501 TR/TL). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 806.18'					Rim to Invert: 2.94'		Slack: 5.28"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	803.24'	340°	17.378"	15" RCP B WALL	19.5"	Hole 22	22"	23.412"	-2.25"	4.377"		
Invert 2	803.24'	270°	19"	15" RCP B WALL	19.5"	Hole 22	22"	22"	-2.25"	-1"		
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions)   INSIDE WALL DIMENSIONS  Coating (Int): Coating (Ext): Seam Up: Flat Seam Dn: n/a Wall Thickness: 8" Floor Height: 8" Height (Int): 24" Height (Ext): 32" Weight (Net): 2685 lb Volume (Net): 0.69cu.yd												