

Structure ID: CB-1A

P1 BX2424-08BA60

BOX BASE 8inW, 8inF F/n

- P2) 24" x 24" - CASTING HEIGHT - 6"
- P1) 24" x 24" - BOX BASE 8inW, 8inF F/n - 60"
- 1) 24" x 24" - SGL 1"x14.5' Butyl
- 1) Hole - 18
- 1) Hole - 8

0 lb
 6025 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 6025 lb




- Structure Notes:
1. (6" TALL CASTING BY OTHERS)
 2. PER ASTM C913 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. REINFORCING PER ASTM A615 (GRADE 60).
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 744.8' Rim to Invert: 5.6' Slack: 1.2" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	739.2'	0°	20"	12" HDPE	14.5"	Hole 18	18"	18"	-1.25"	0"
Invert 2	739.2'	90°	20"	4" PVC SCH40	4.5"	Hole 8	8"	8"	-0.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

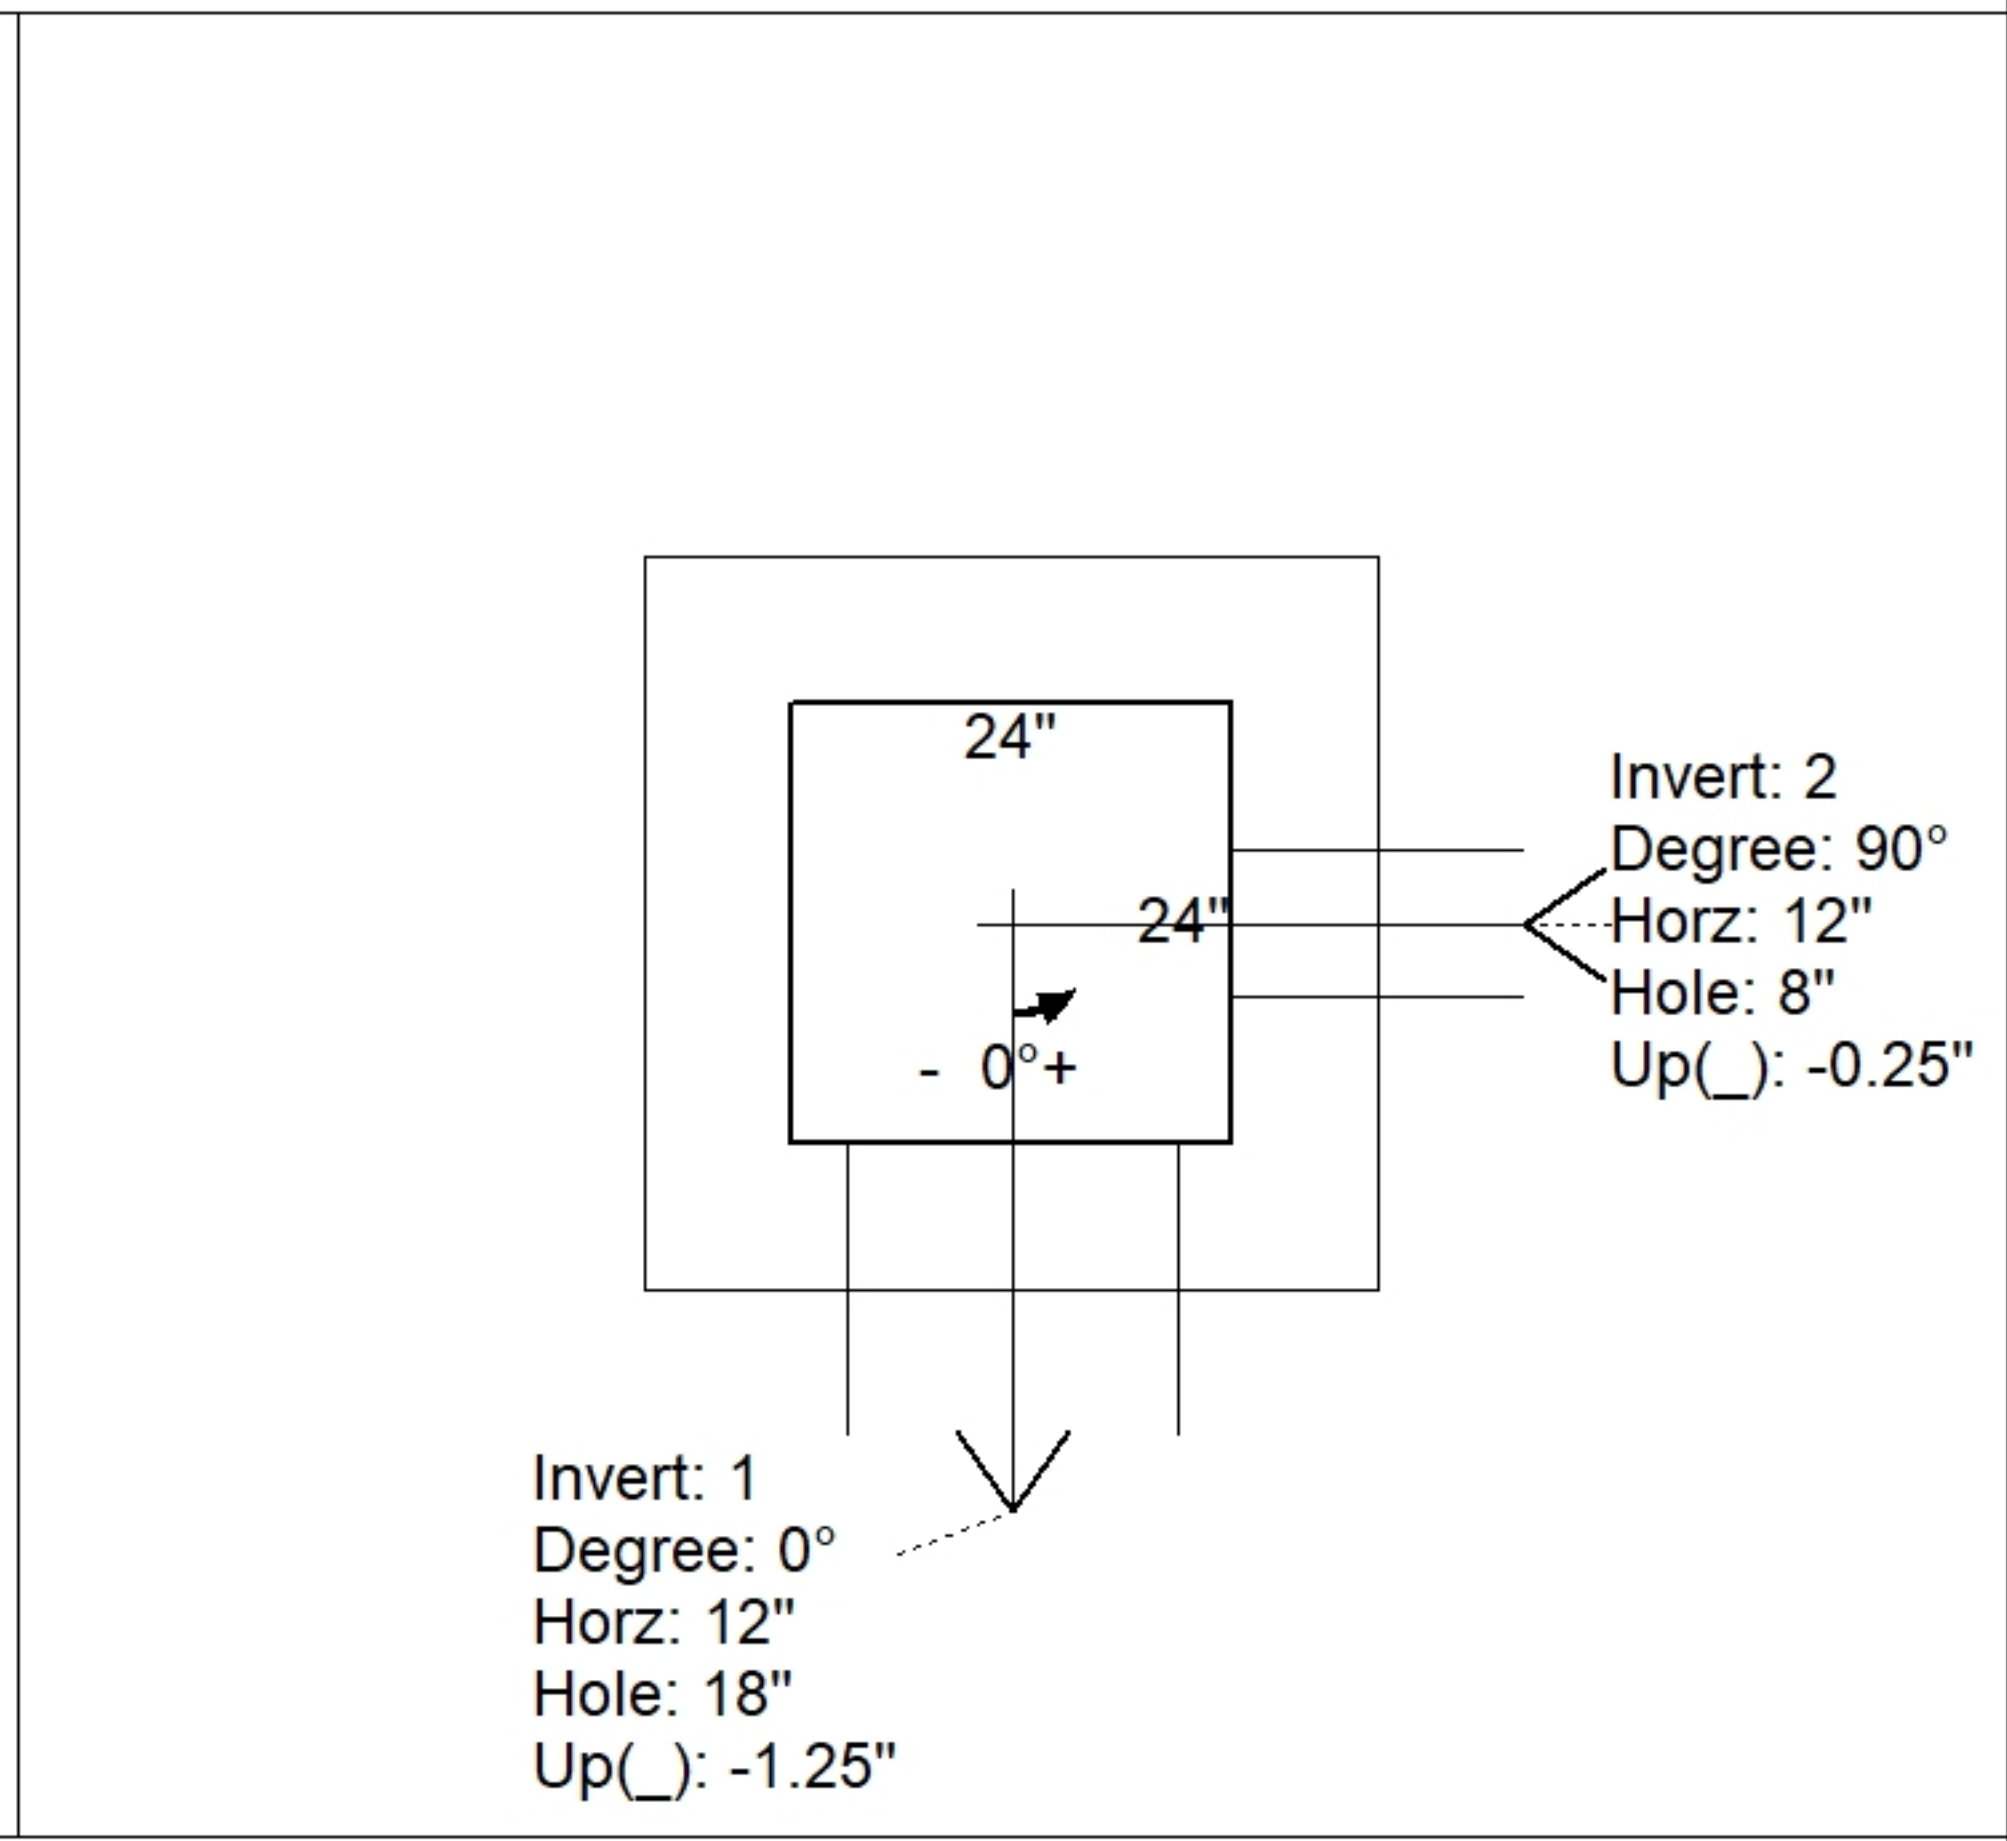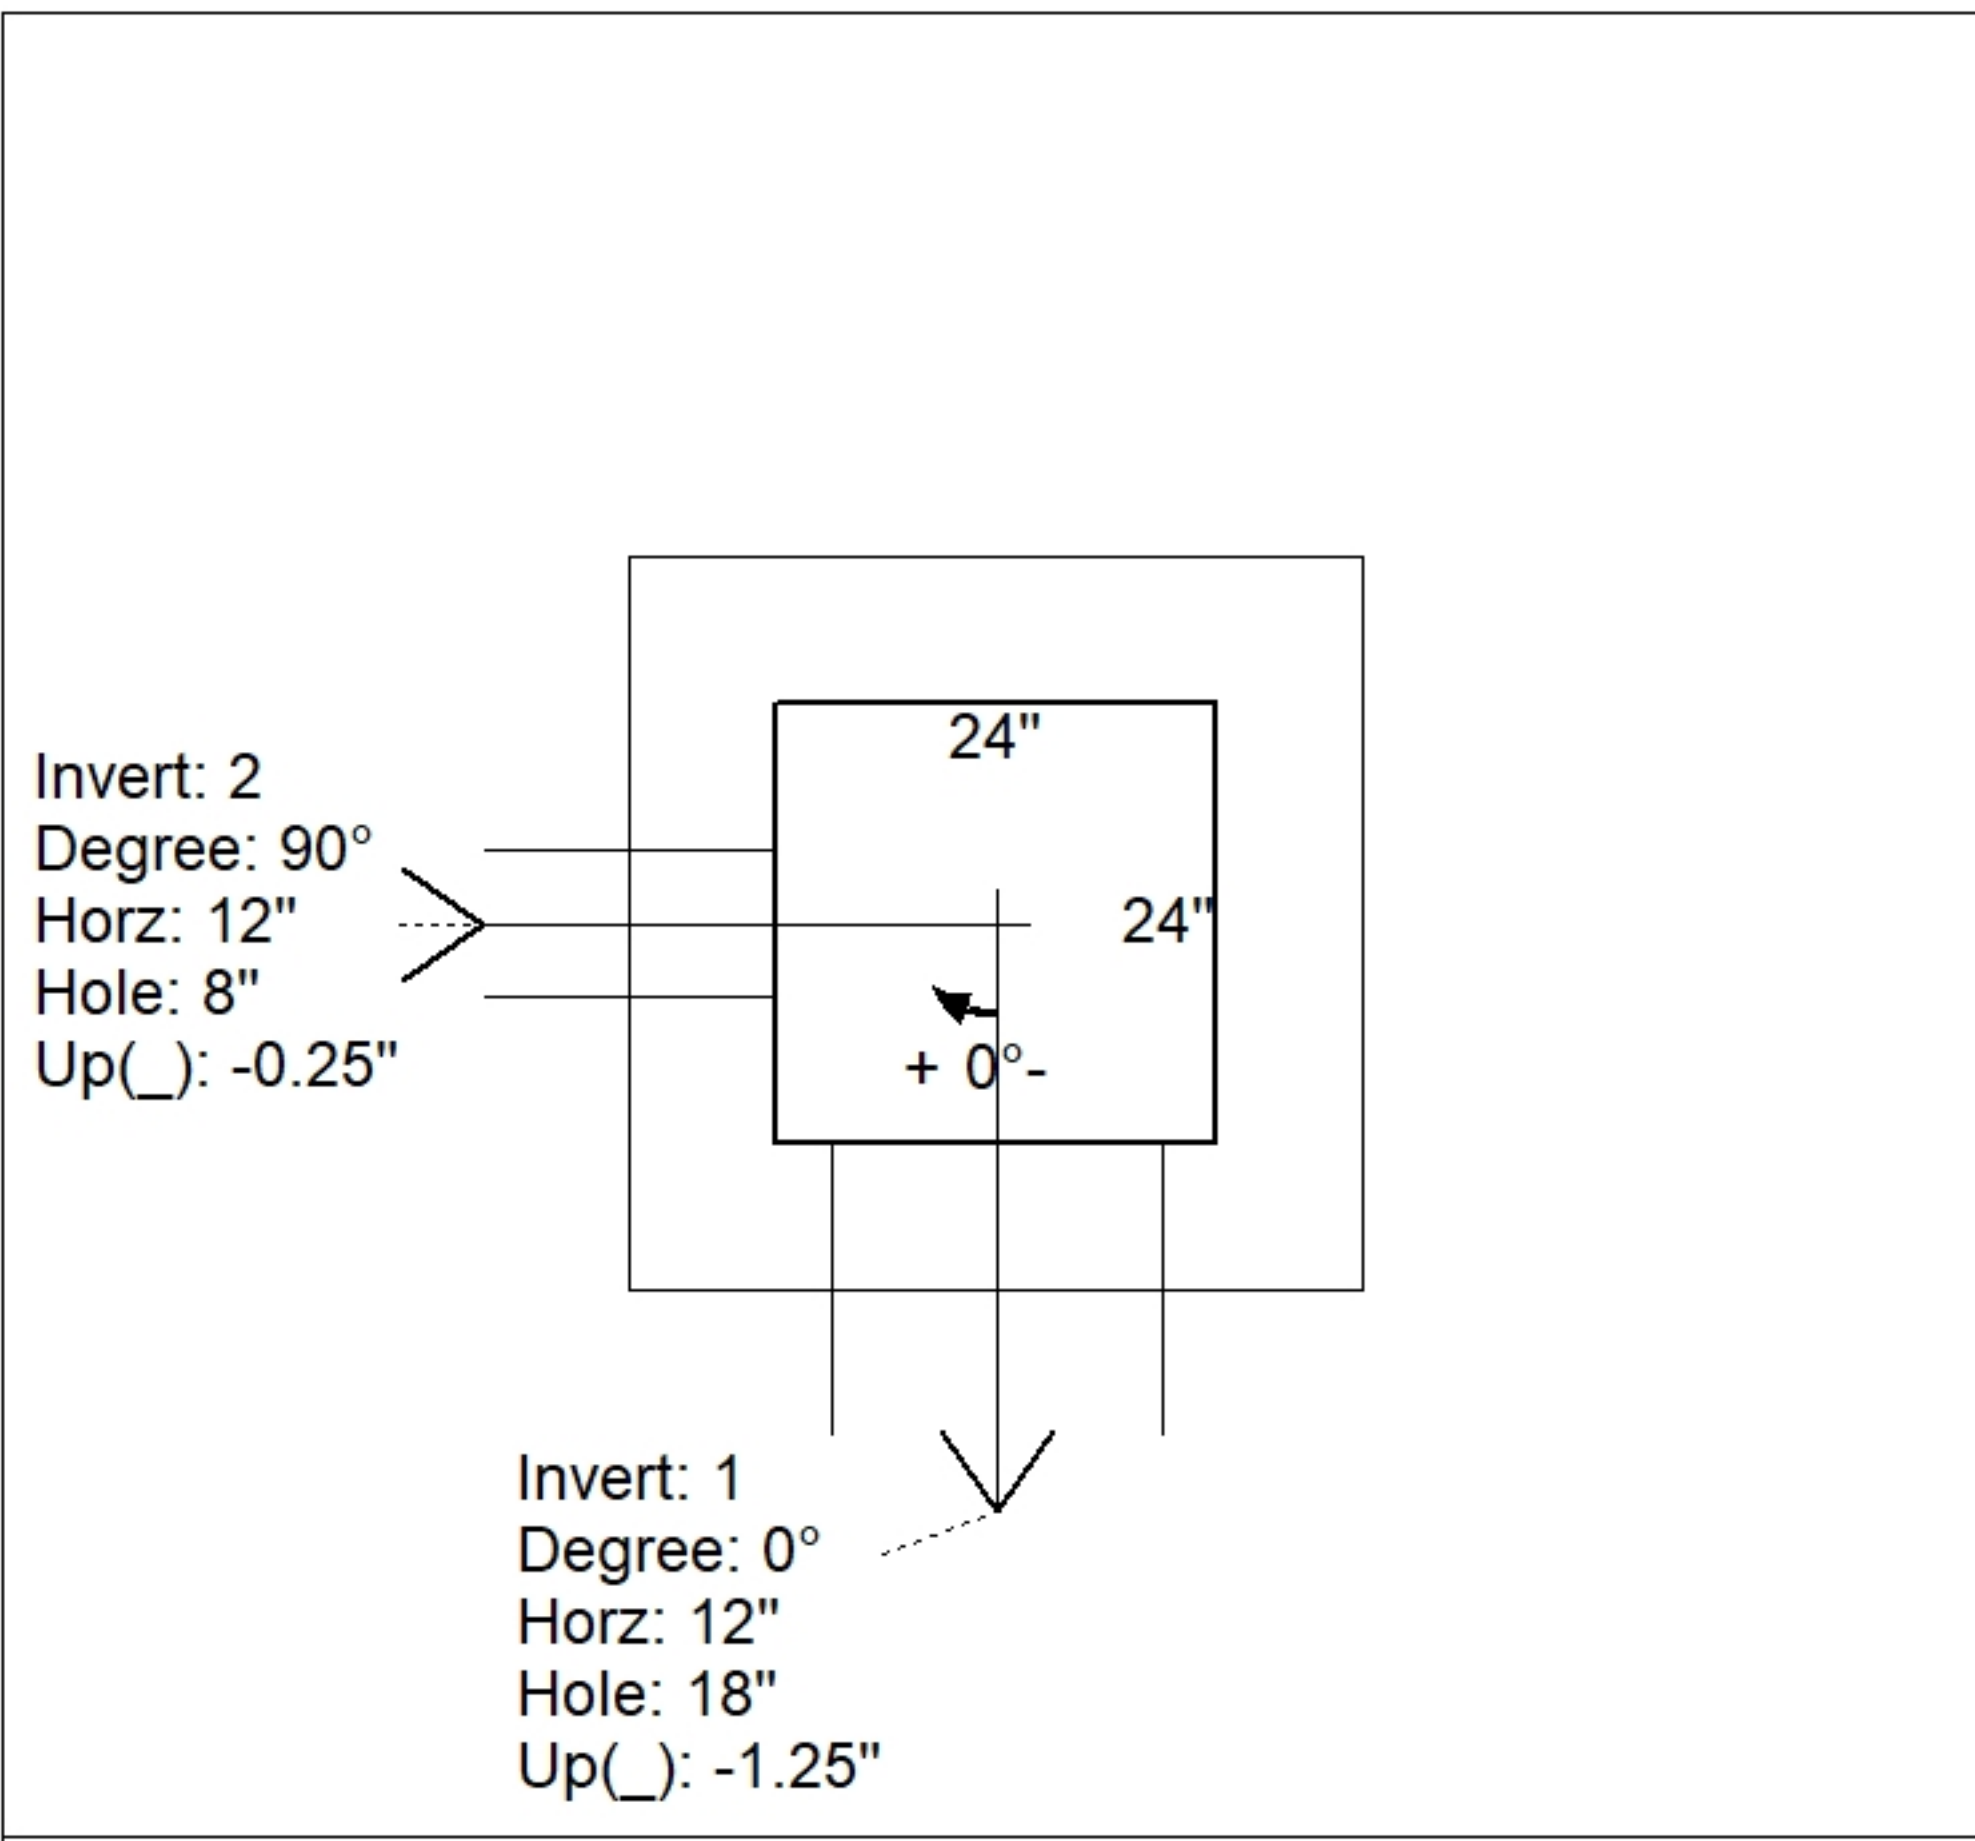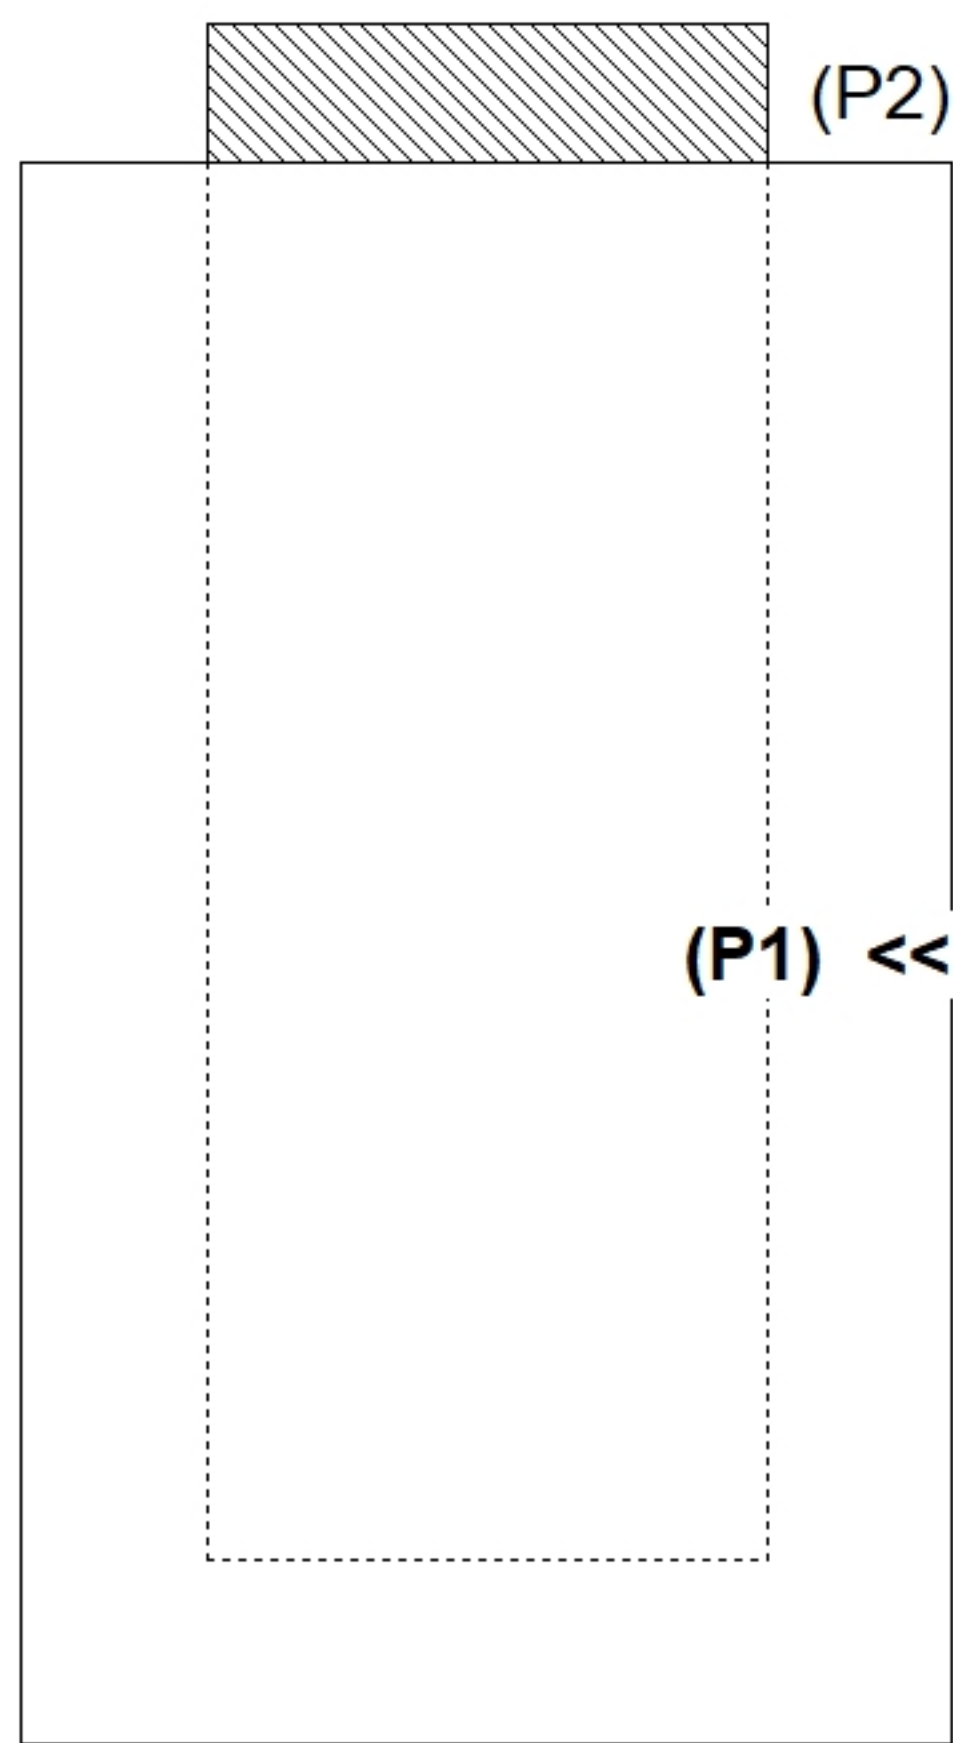

INSIDE WALL DIMENSIONS

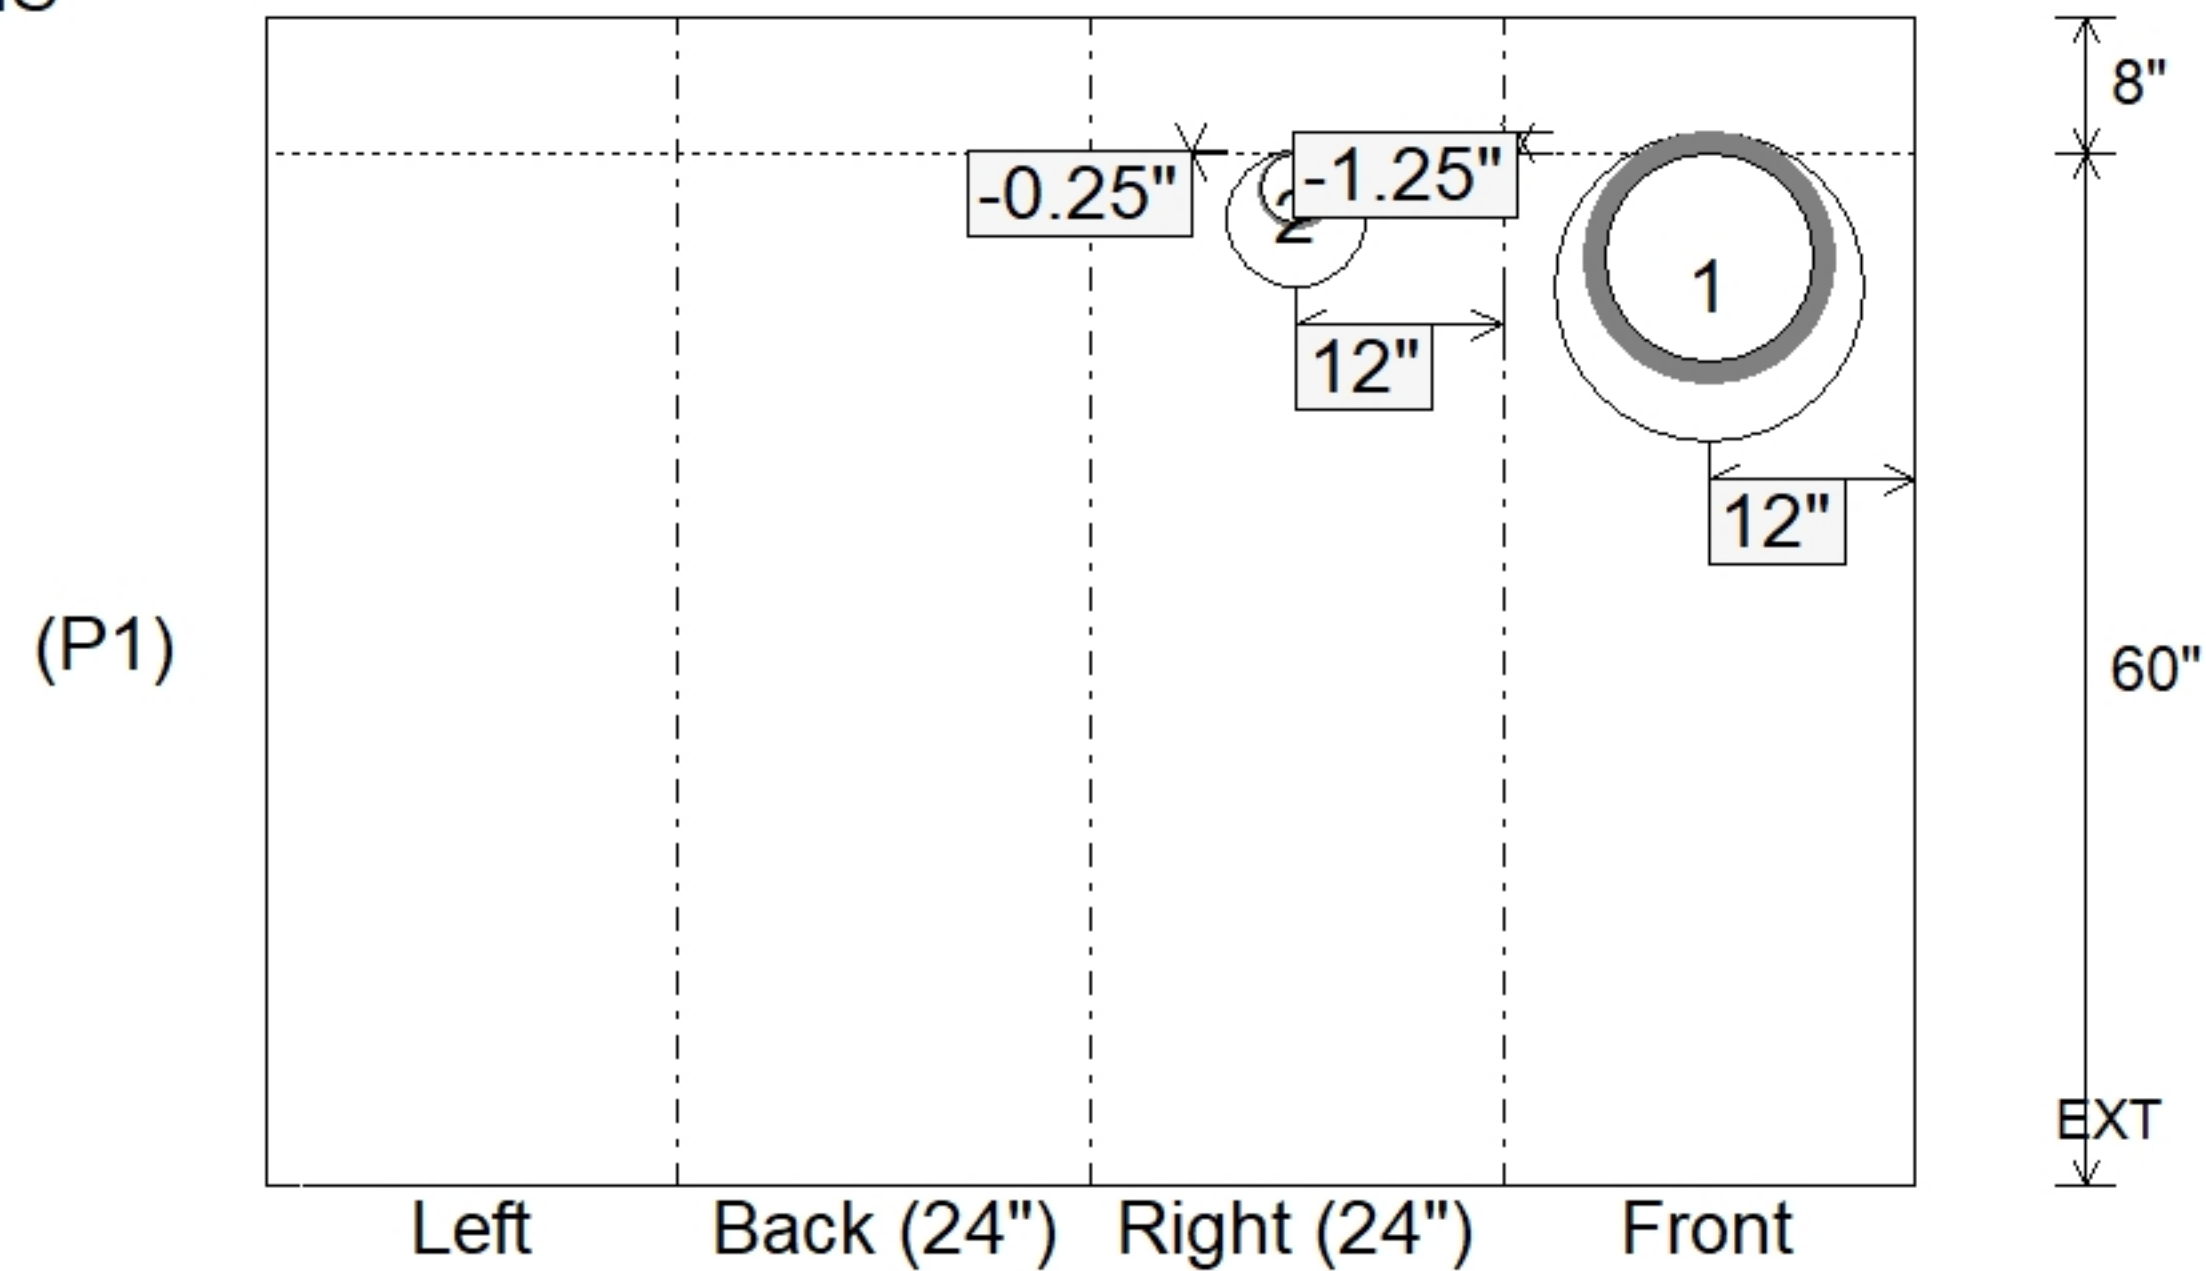

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 60" Height (Ext): 68"	Weight (Net): 6025 lb Volume (Net): 1.54cu.yd
----------------------------------	-------------------------------	--	--	--