

**Structure ID: CBI-1E**

**P1 MH048BA66**

**MH BASE T/n**

P3) 24" x 24" - CASTING HEIGHT - 7" P2) 48" - MH FLAT TOP w/24"x24" Hole F/G - 12" P1) 48" - MH BASE T/n - 66" 1) 48" - SGL 1"x14.5' Butyl (2x) 1) Hole - 18 6) MH Step ML-10-TDS-NCR - 10"	0 lb 2080 lb 5832 lb 0 lb 0 lb 0 lb ----- Structure Total: 7912 lb
--	---

**Structure Notes:**




1. (7" TALL CASTING BY OTHERS)
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).  
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..  
 - RISER/WALLS (As .12)  
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 740.65'    Rim to Invert: 7.15'    Slack: 0.8"    Sump: 0"    Step Position: 180°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	733.5'	0°	0"	12" HDPE	14.5"	Hole 18	18"	18.451"	-1.25"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

**UPSIDE-DOWN VIEW (int. dimensions)**

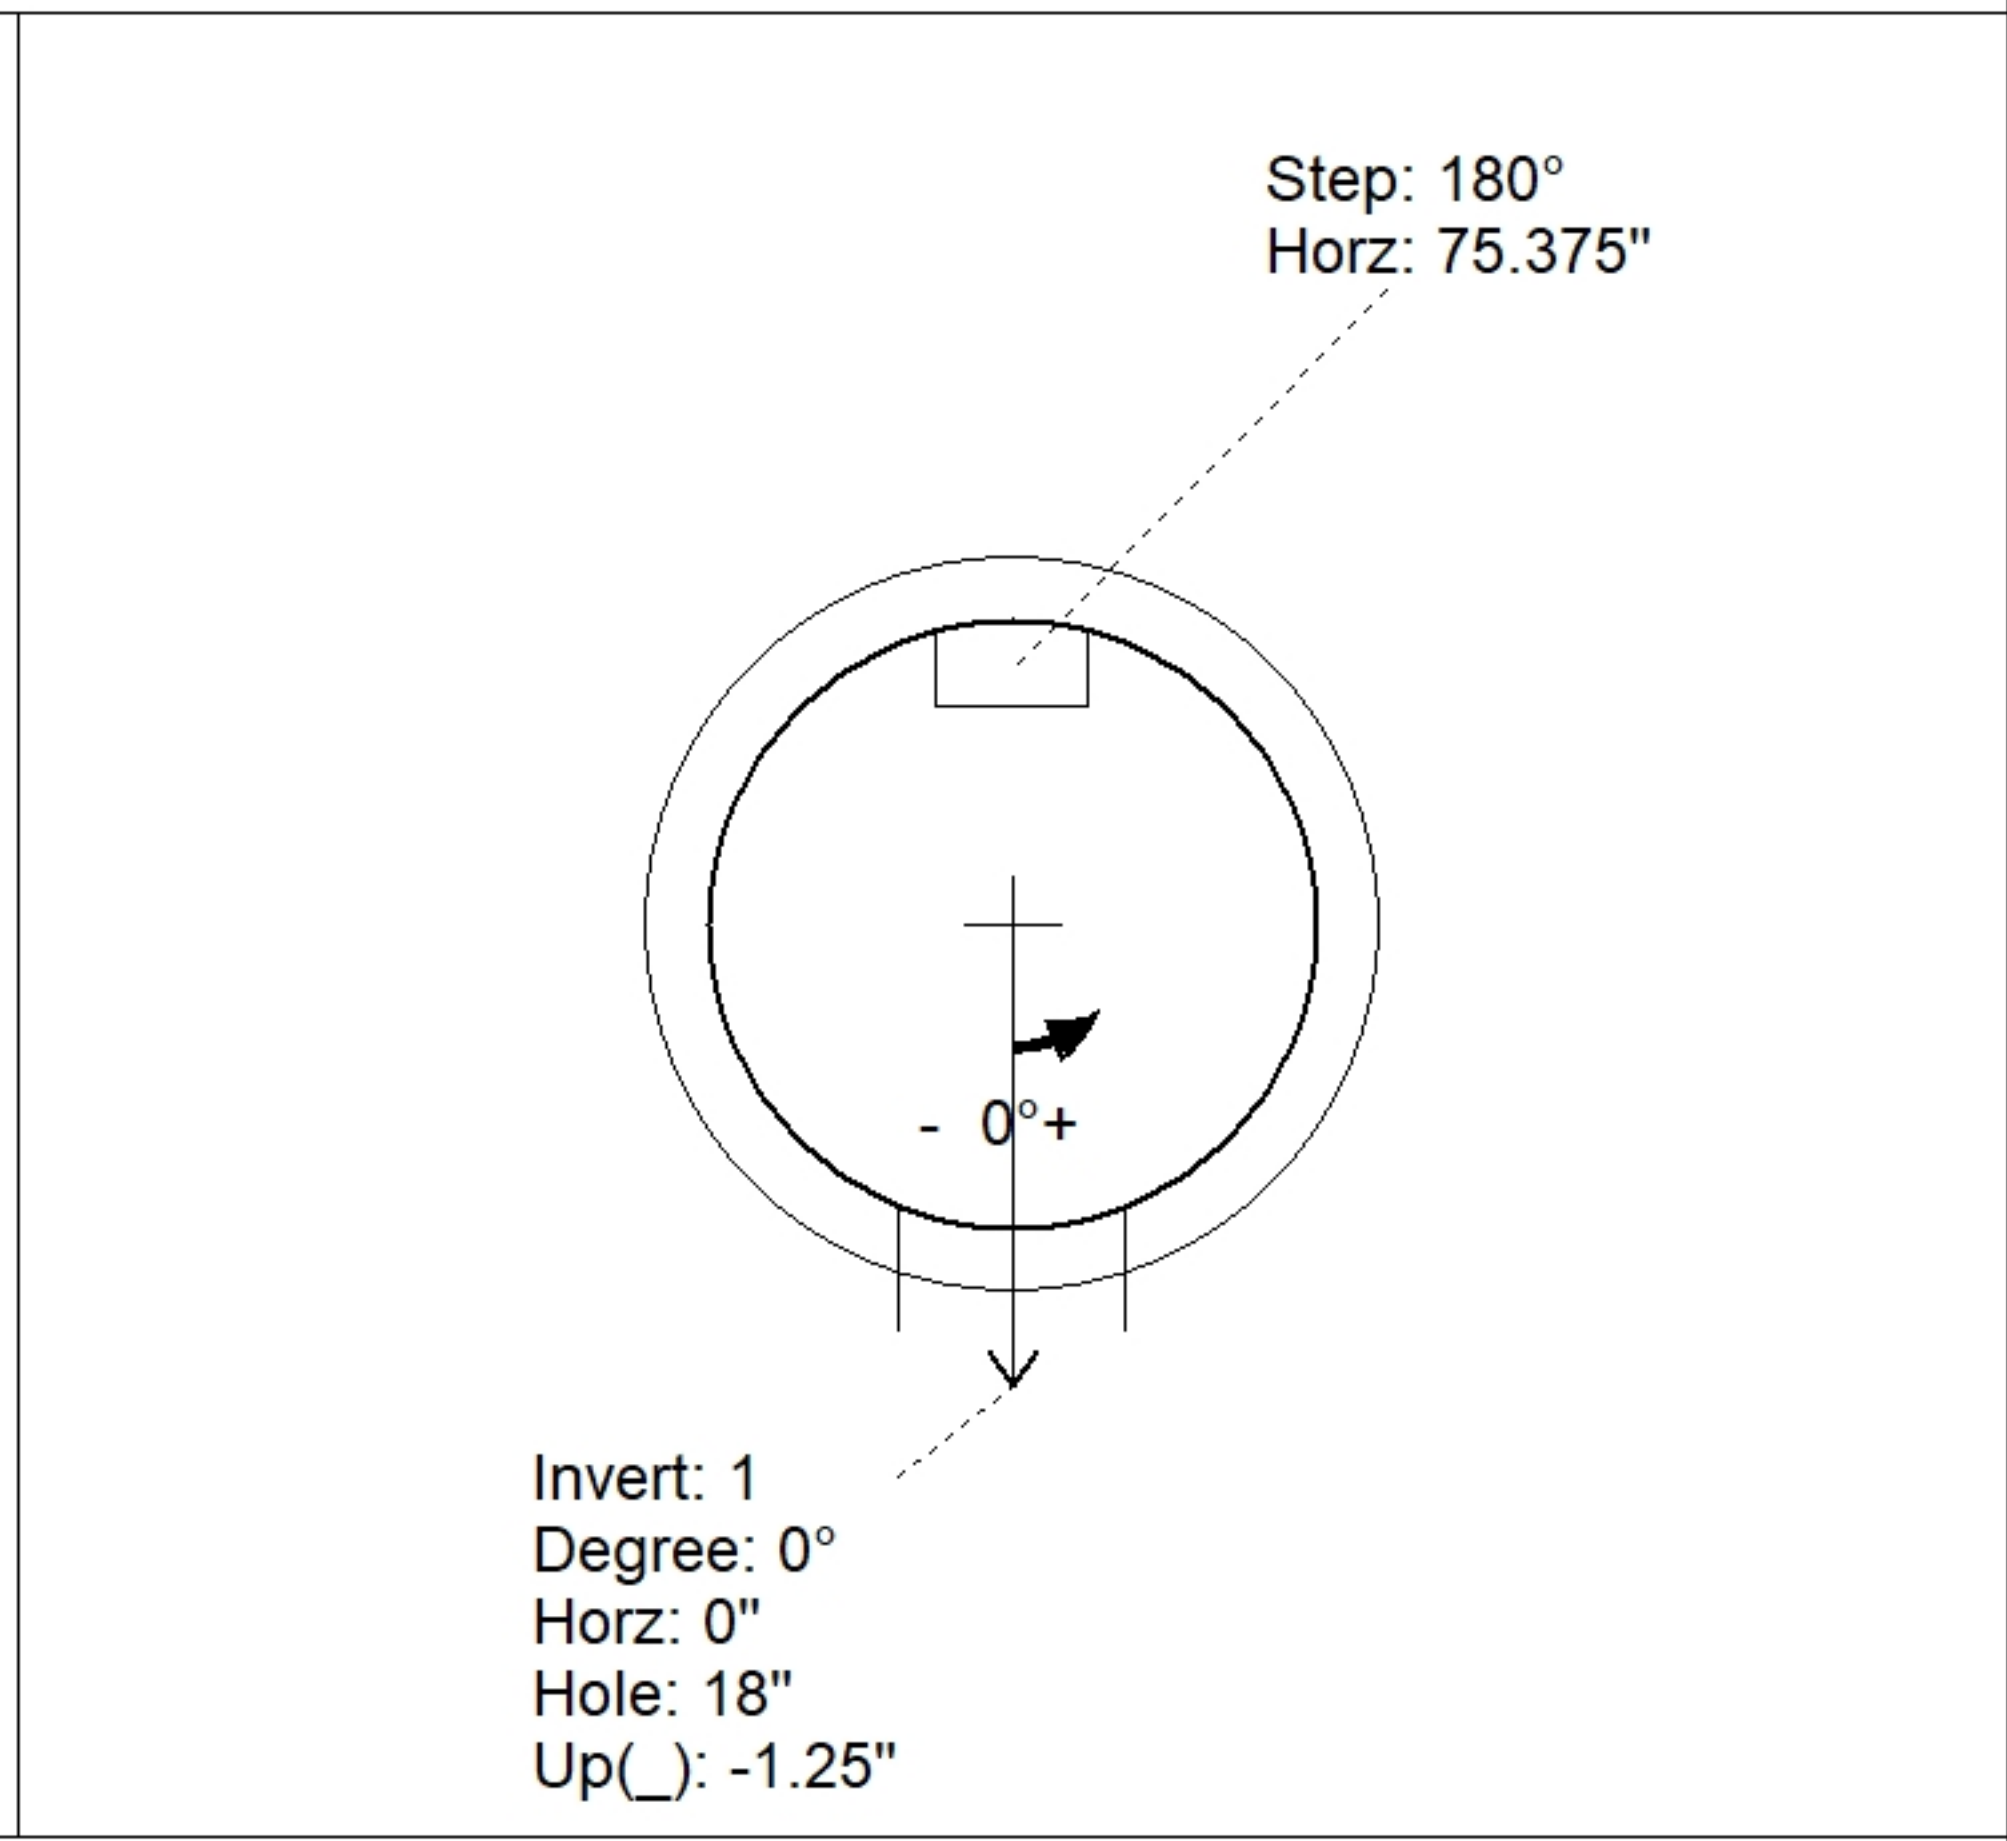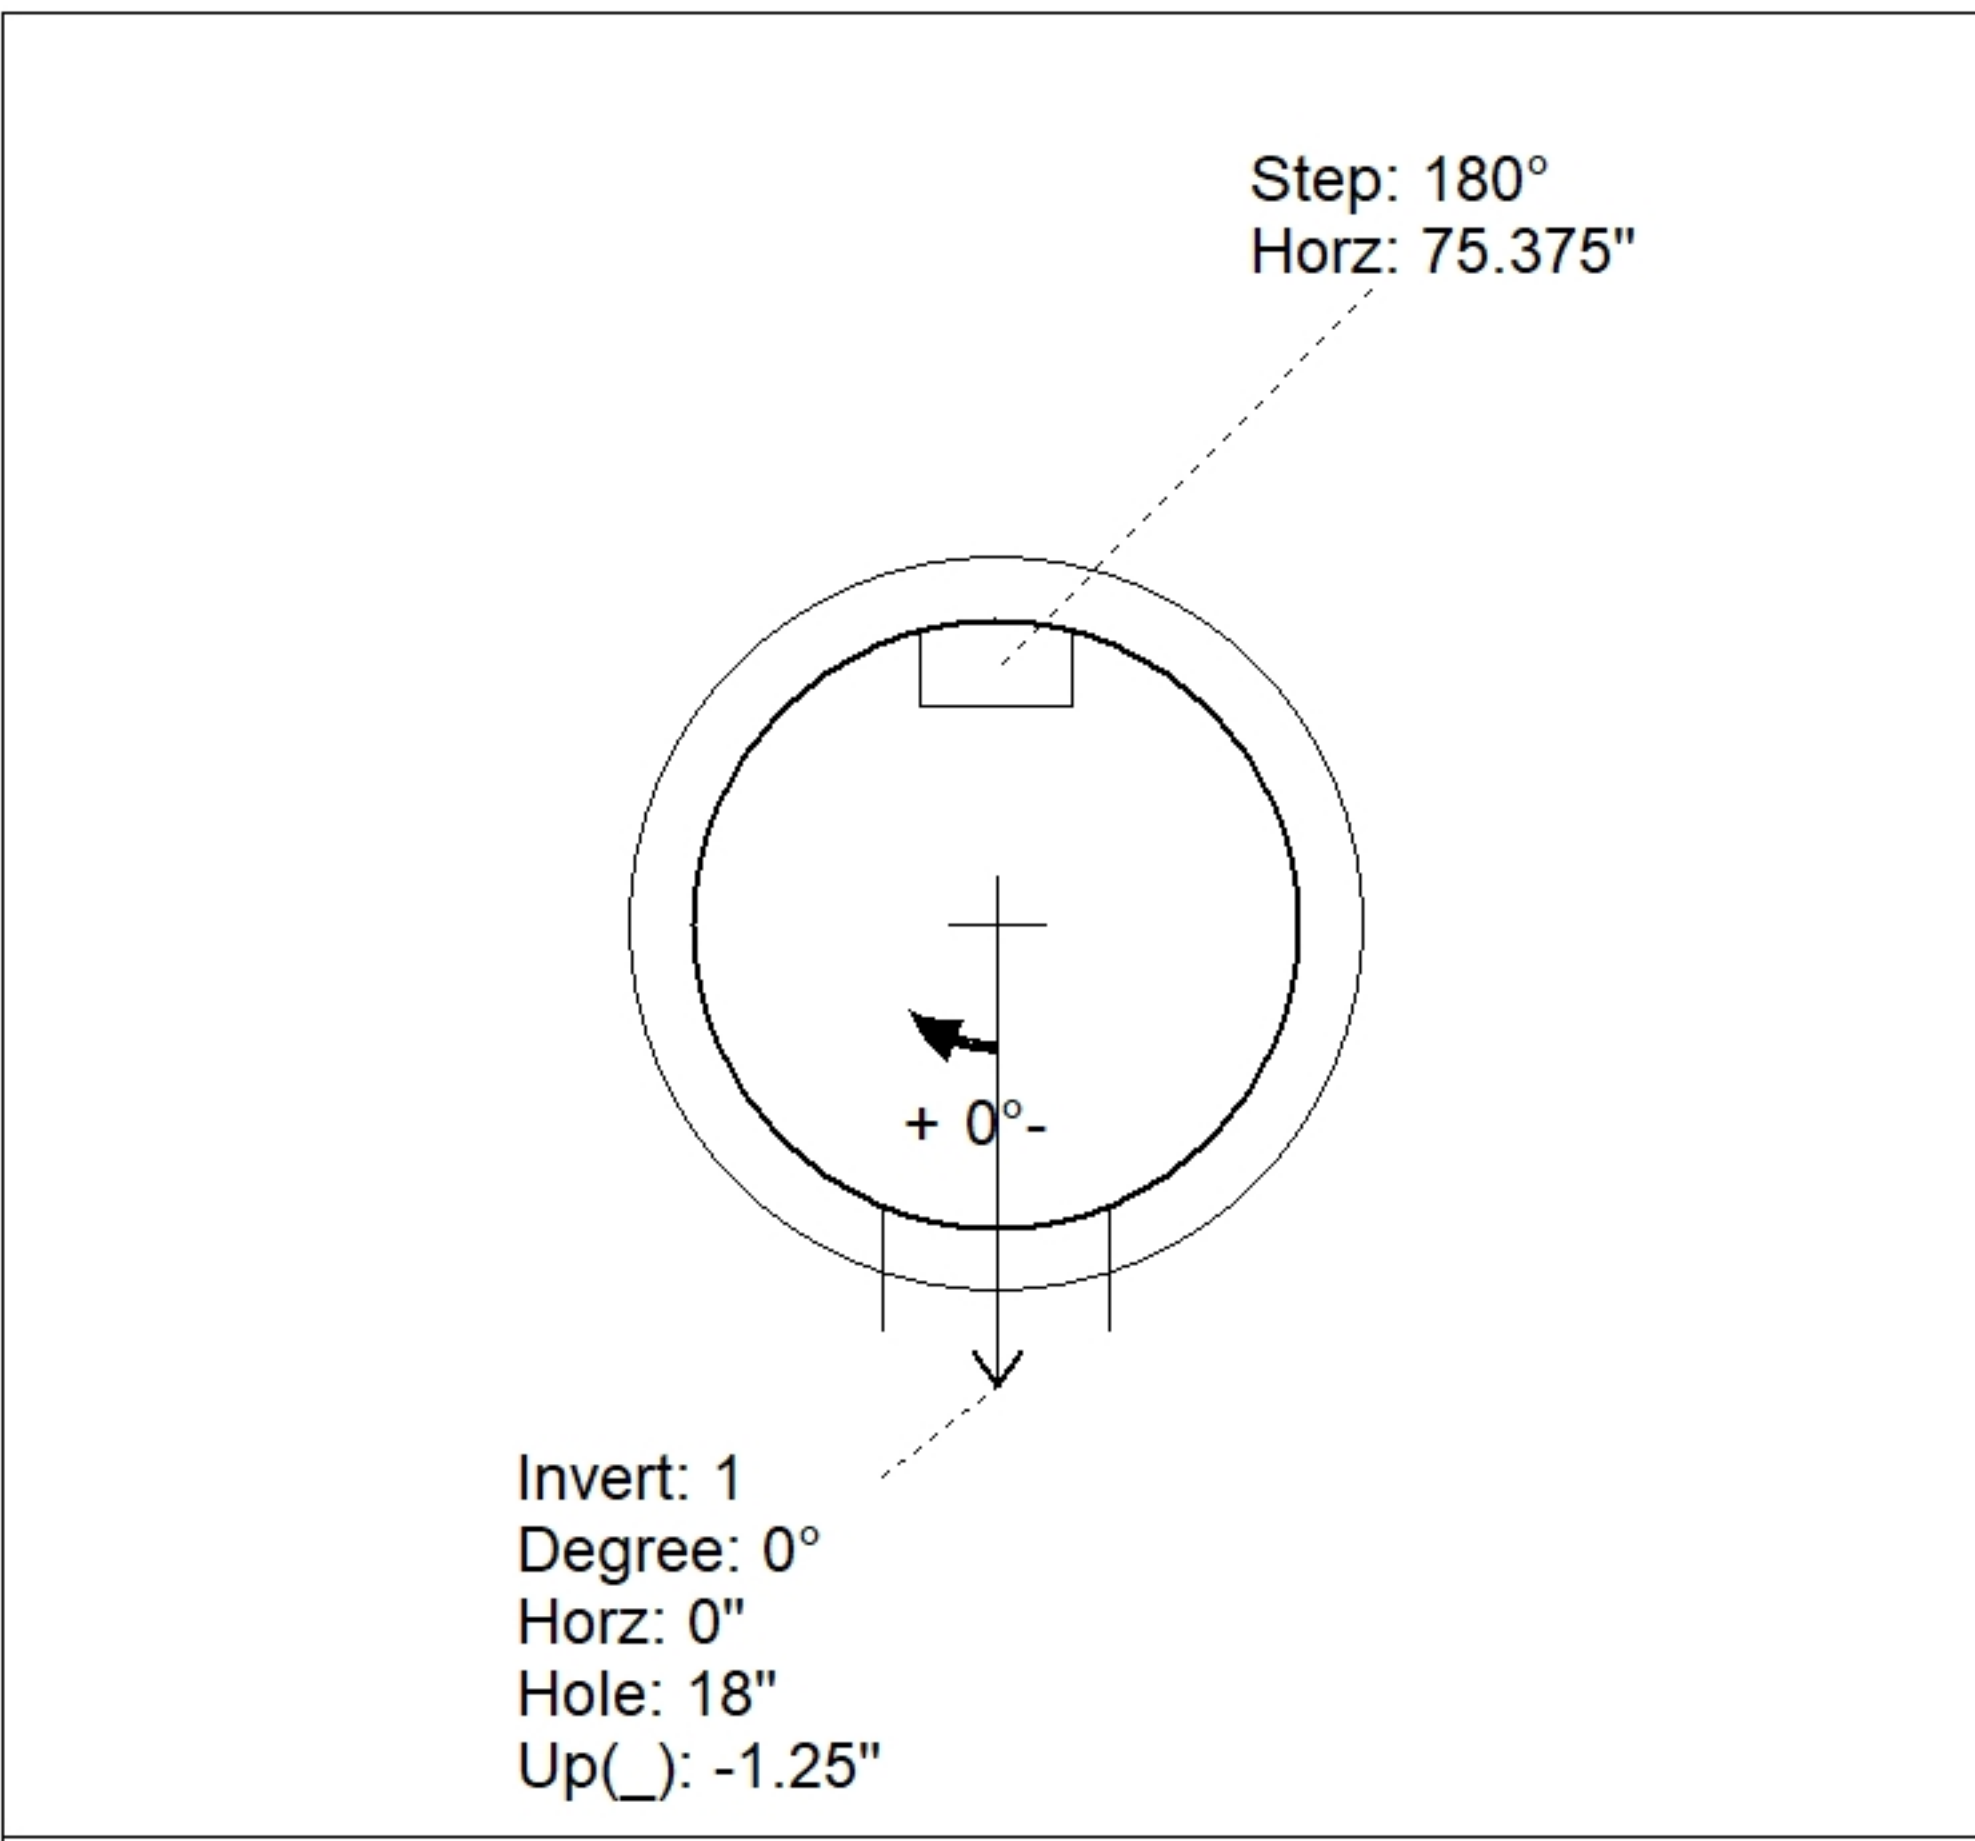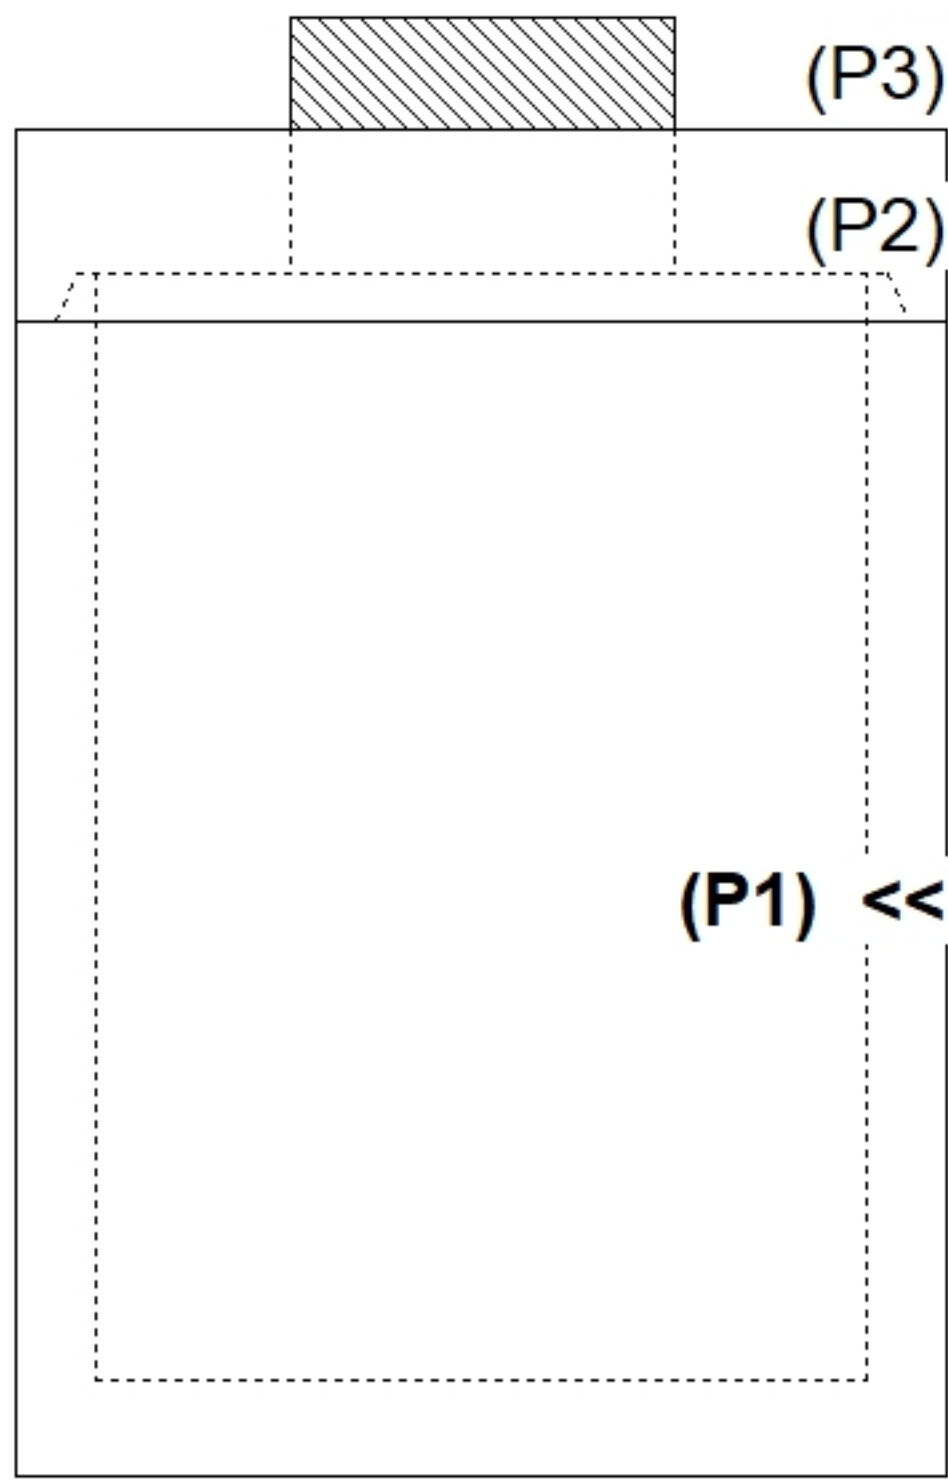

**INSIDE WALL DIMENSIONS**

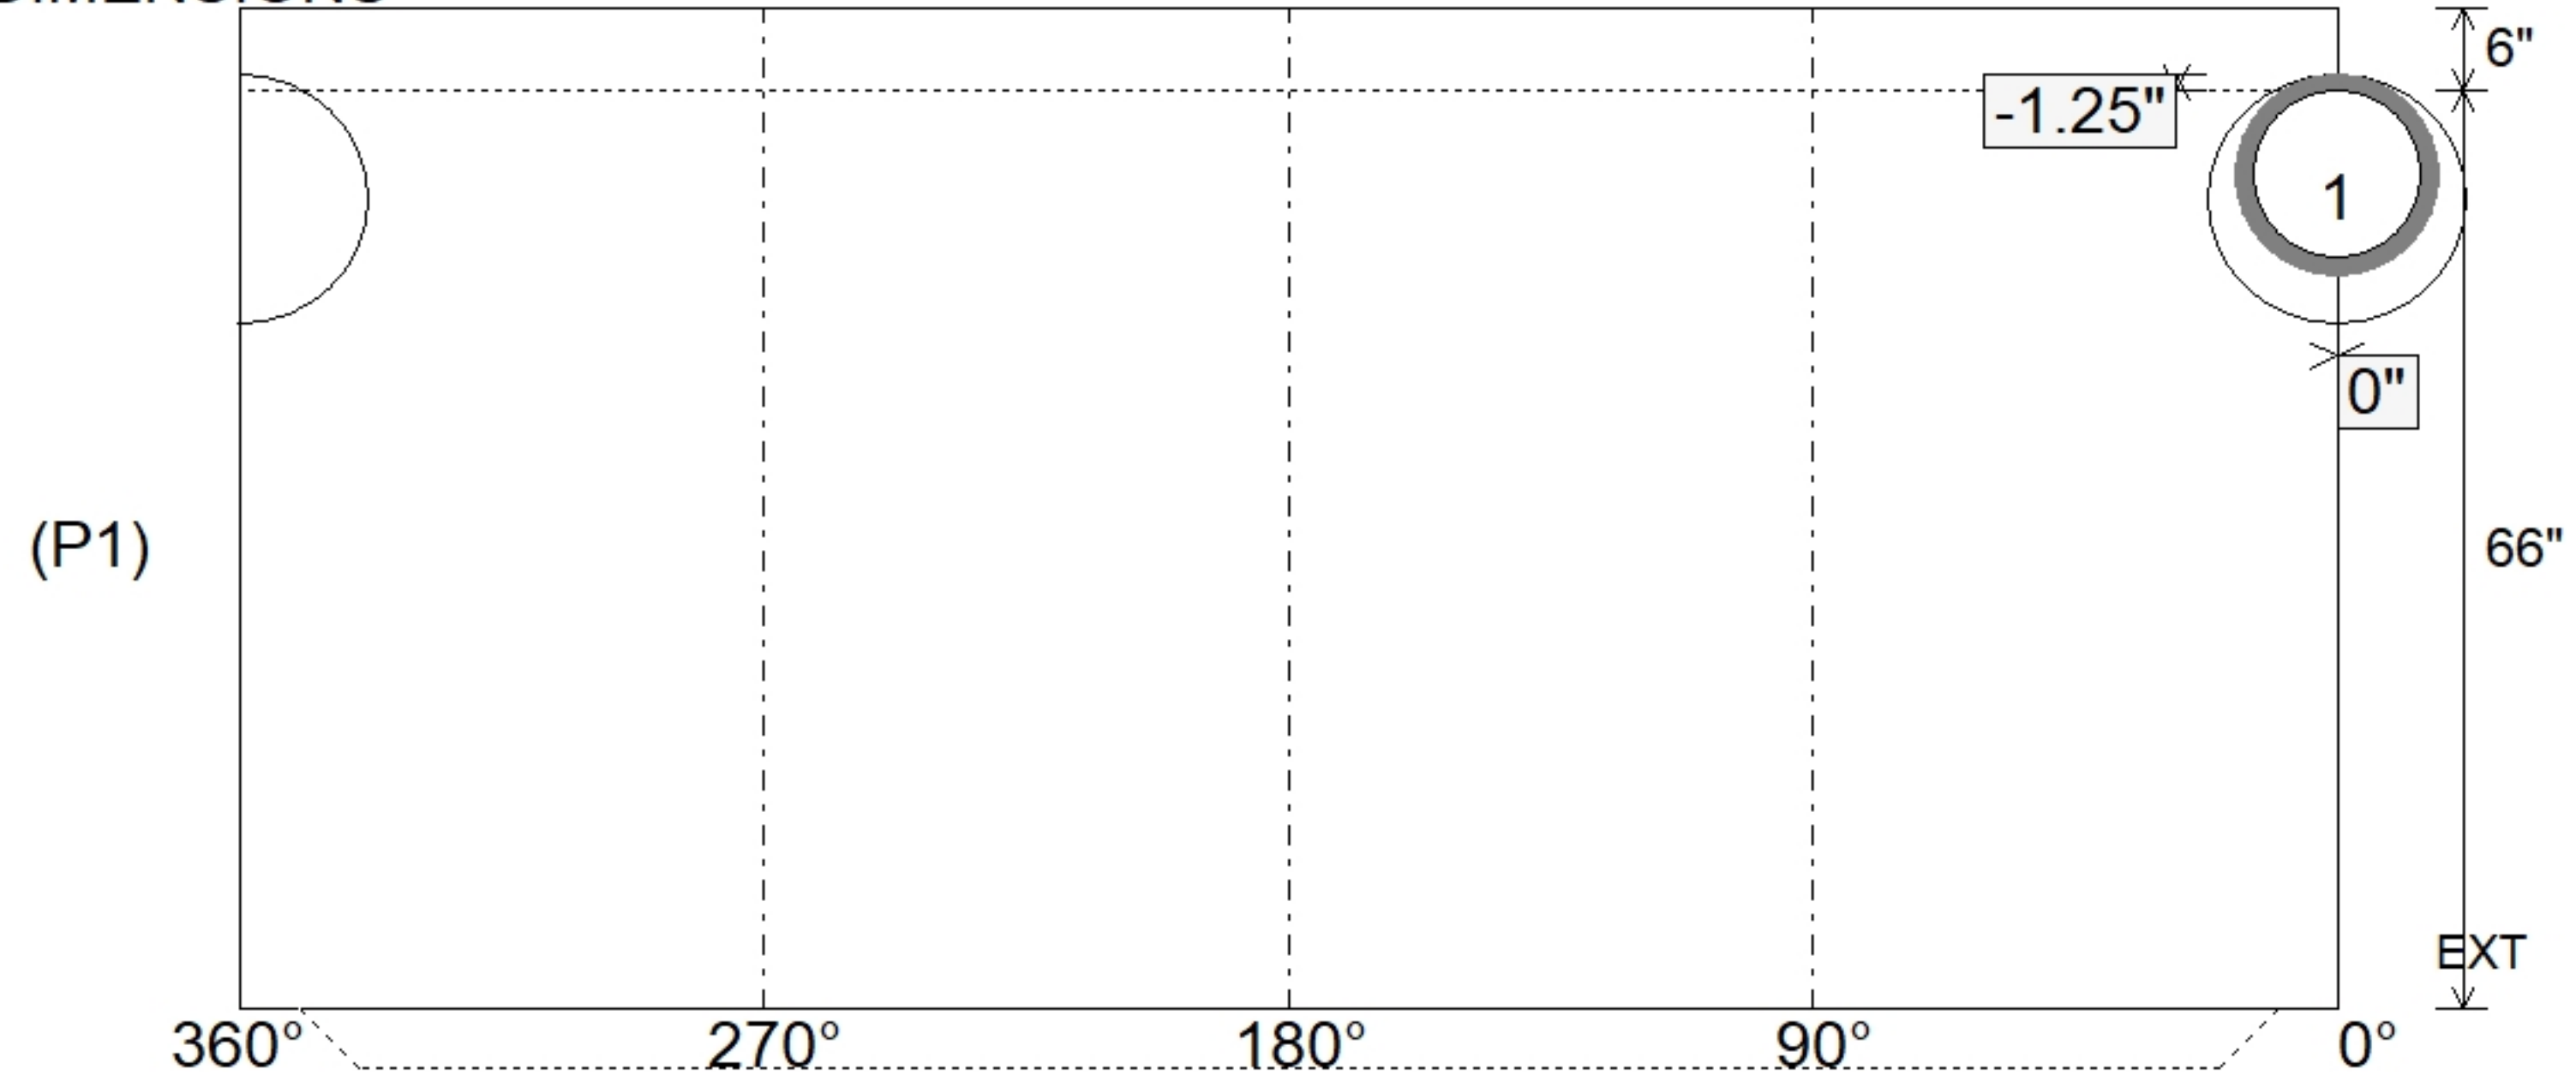

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 66" Height (Ext): 72"	Weight (Net): 5832 lb Volume (Net): 1.49cu.yd
----------------------------------	---------------------------------	--	--	--