

Job Name: 25-2860 Grace Park
 Job Location: Nashville, TN
 Contractor: Elite Building Group Inc.

Plant: Beaver Dam
 10/14/2025 3:22:04 PM

Tech: C.Russ
 PC: A.Chambers



Structure ID: 1B



P2 MH048LD12X-32ECC

MH FLAT TOP w/32" Hole ECC w/Xypex F/G

P3) 32" - CASTING HEIGHT - 7"	0 lb
P2) 48" - MH FLAT TOP w/32" Hole ECC w/Xypex F/G - 12"	1851 lb
P1) 48" - MH BASE Custom Ht, w/YYPEX T/n - 21"	2701 lb
1) 48" - MH INVERT CHANNEL w/YYPEX - FULL HEIGHT	1440 lb
1) JOINT WRAP - 0.085"x8"x50' CONSEAL CS212	0 lb
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)	0 lb
1) ADMIXTURE CONBLOCK CDA RED	0 lb
1) 48" - DBL 1"x14.5' Butyl (2x)	0 lb
1) PSX - 12-08 NYLO	8 lb
1) PSX - 12-08 NYLO	8 lb
Structure Total:	6008 lb

Structure Notes:
 1. PER ASTM C913 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. NO INVERT CHANNEL.
 4. CASTING BY OTHERS

REINFORCING PER ASTM A615 (GRADE 60).
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

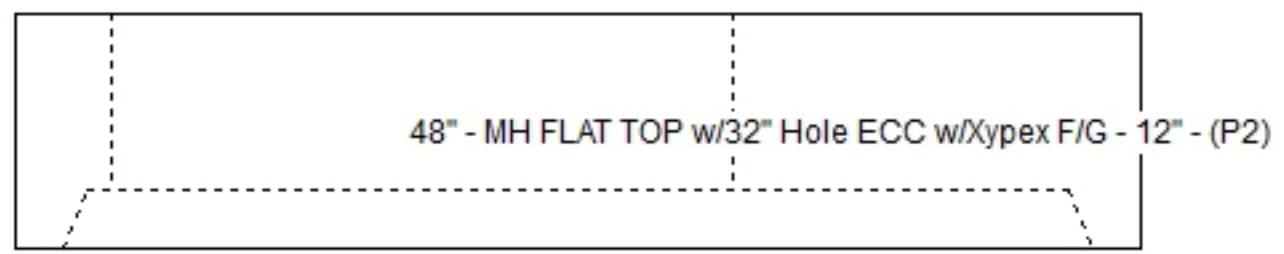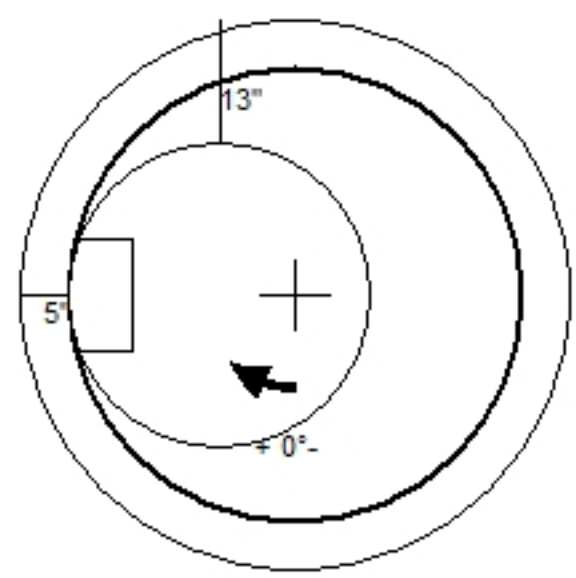

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 12"	Weight (Net): 1851 lb Volume (Net): 0.47cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--