

Structure ID: 9

P1 BX4848-08BAVF

BOX BASE 8inW, 8inF, Variable Ht T/n

P3) 48" x 48" - CASTING HEIGHT - 0" P2) 48" x 48" - BOX RISER 8inW, Variable Ht F/G - 43" P1) 48" x 48" - BOX BASE 8inW, 8inF, Variable Ht T/n - 26" 1) Hole - 26 1) Hole - 3 1) Vert. Slot n/n - 12"x30" 3) Horiz Slot n/n - 24"x6"	0 lb 5981 lb 6298 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 12279 lb
--	--

Structure Notes:
 1. PER ASTM C913 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. NO INVERT CHANNEL.
 4. CASTING BY OTHERS




REINFORCING PER ASTM A615 (GRADE 60).
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 575.75' Rim to Invert: 5.75' Slack: 0" Sump: 0" Step Position: 0°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	570'	0°	32"	18" RCP B WALL	23"	Hole 26	26"	26"	-2.5"	0"
Invert 2	570'	180°	32"	3" Orifice	3"	Hole 3	3"	3"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

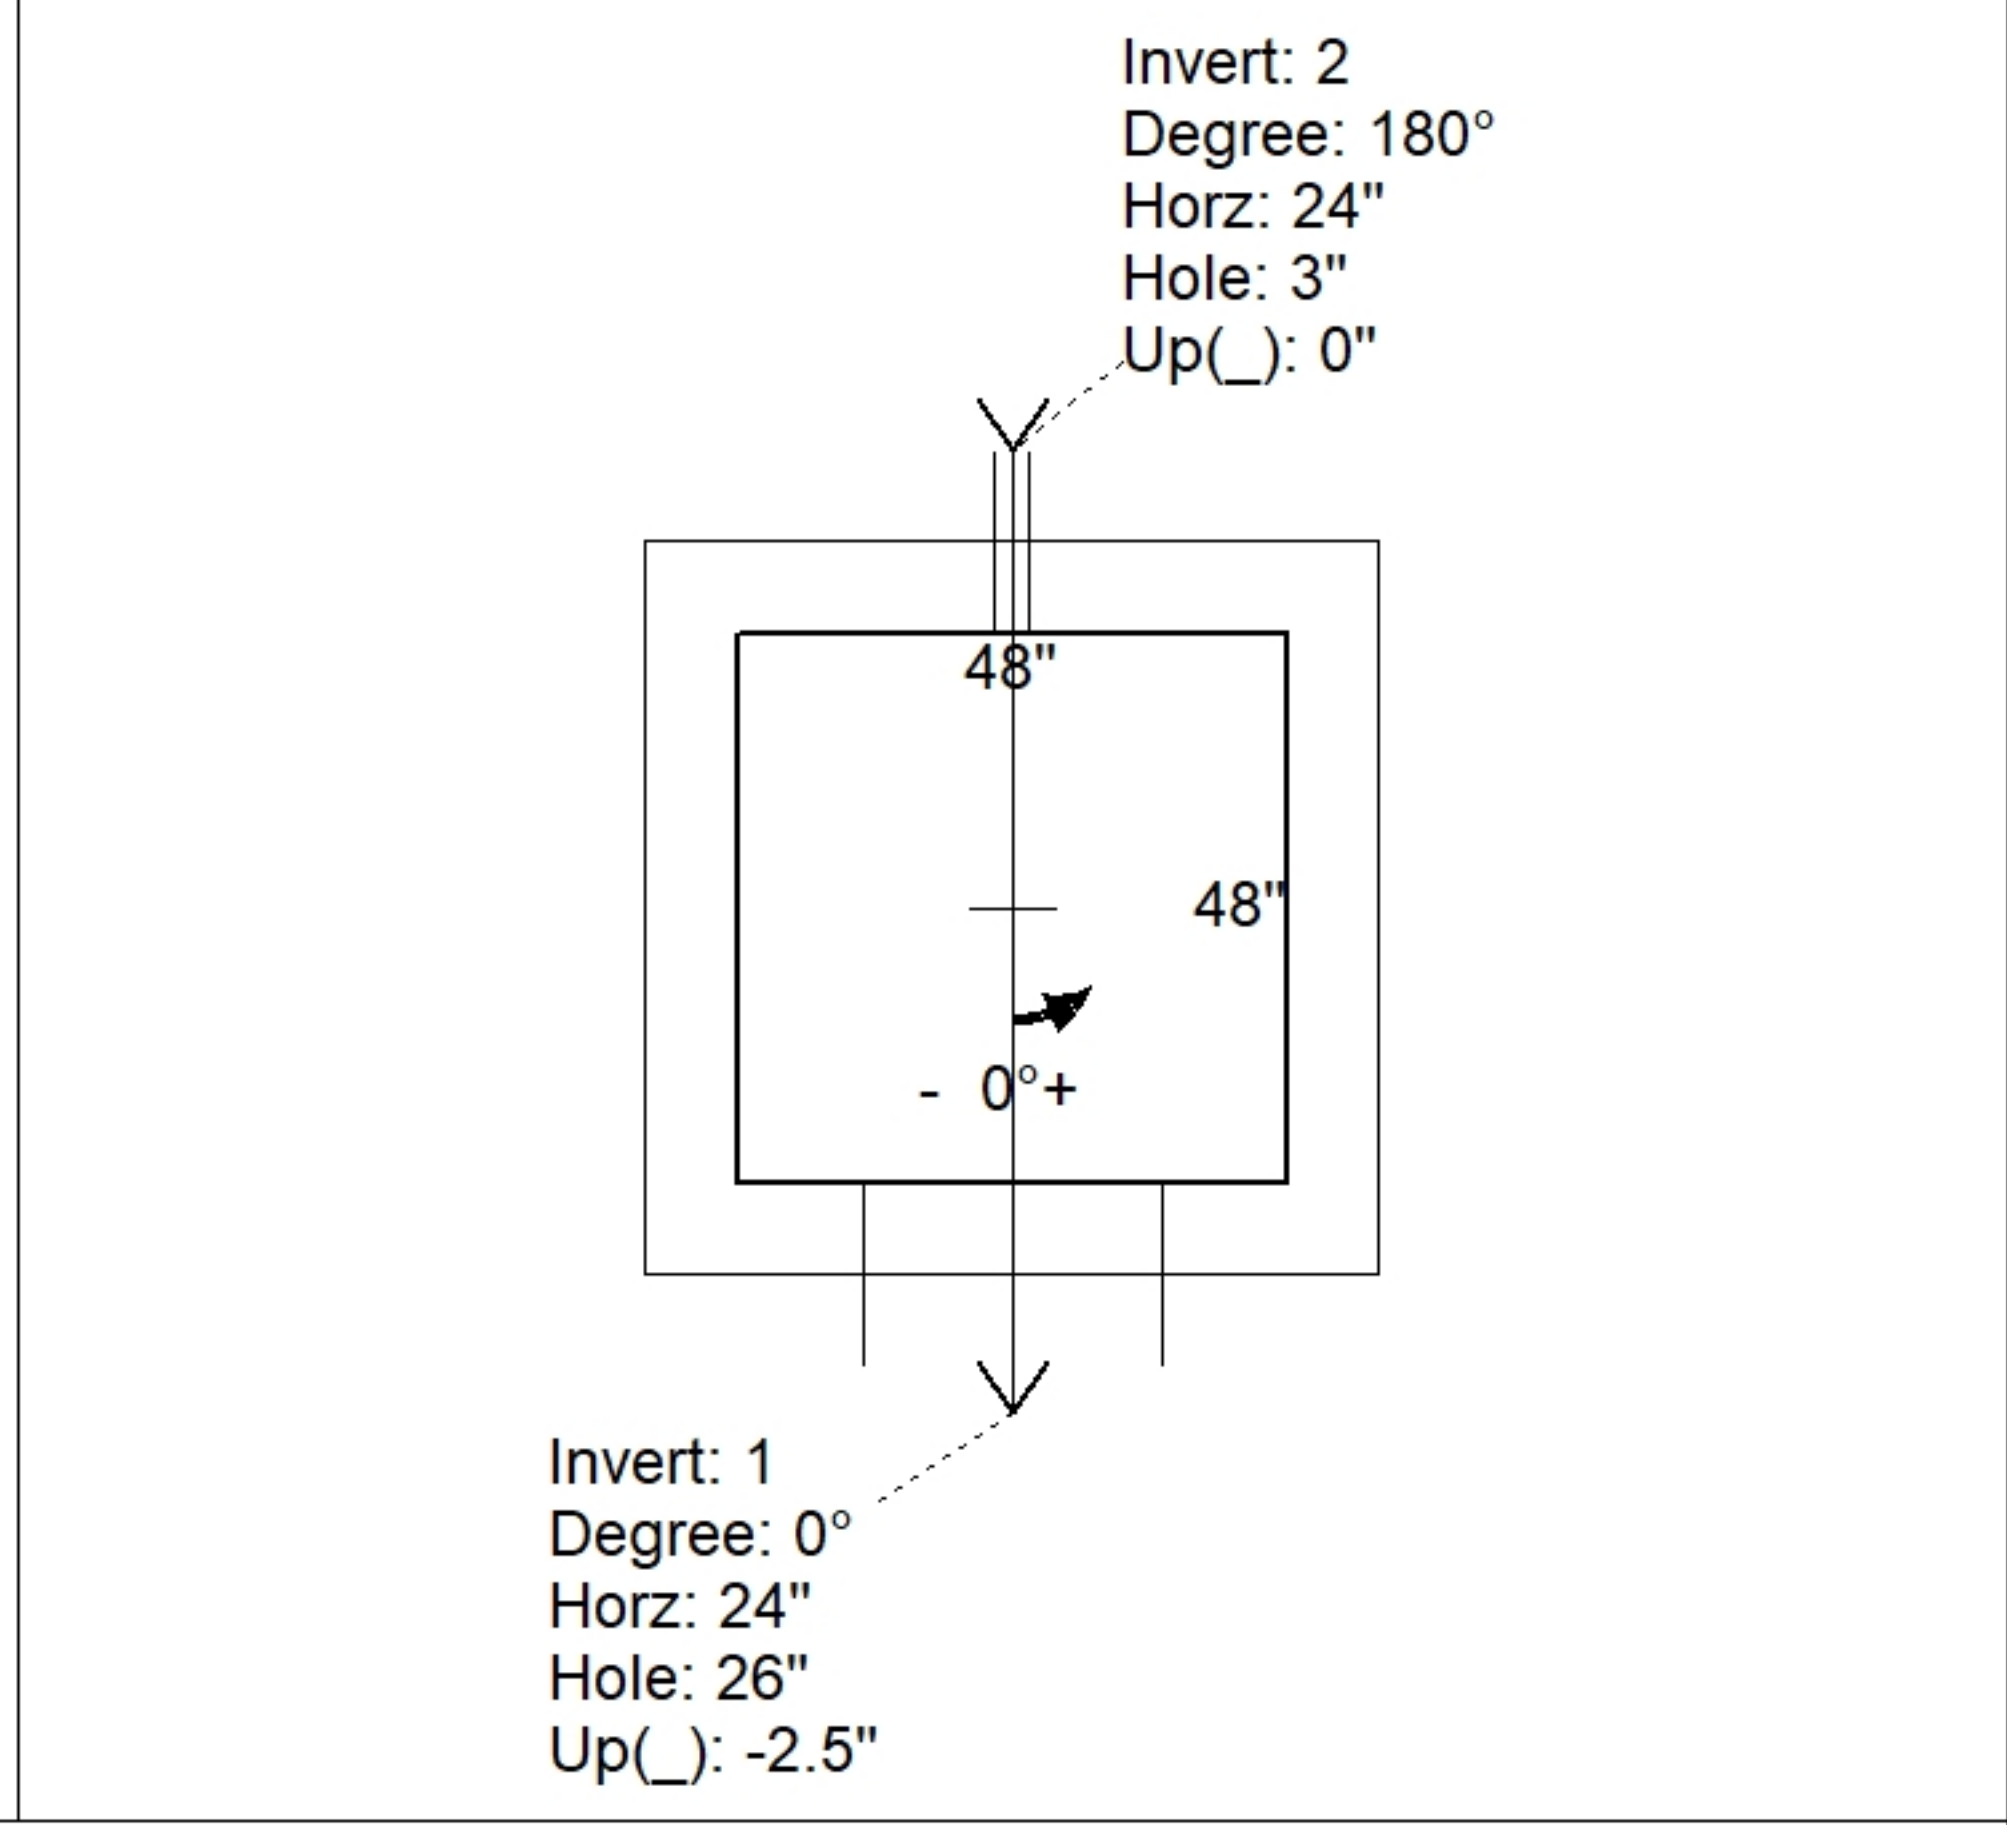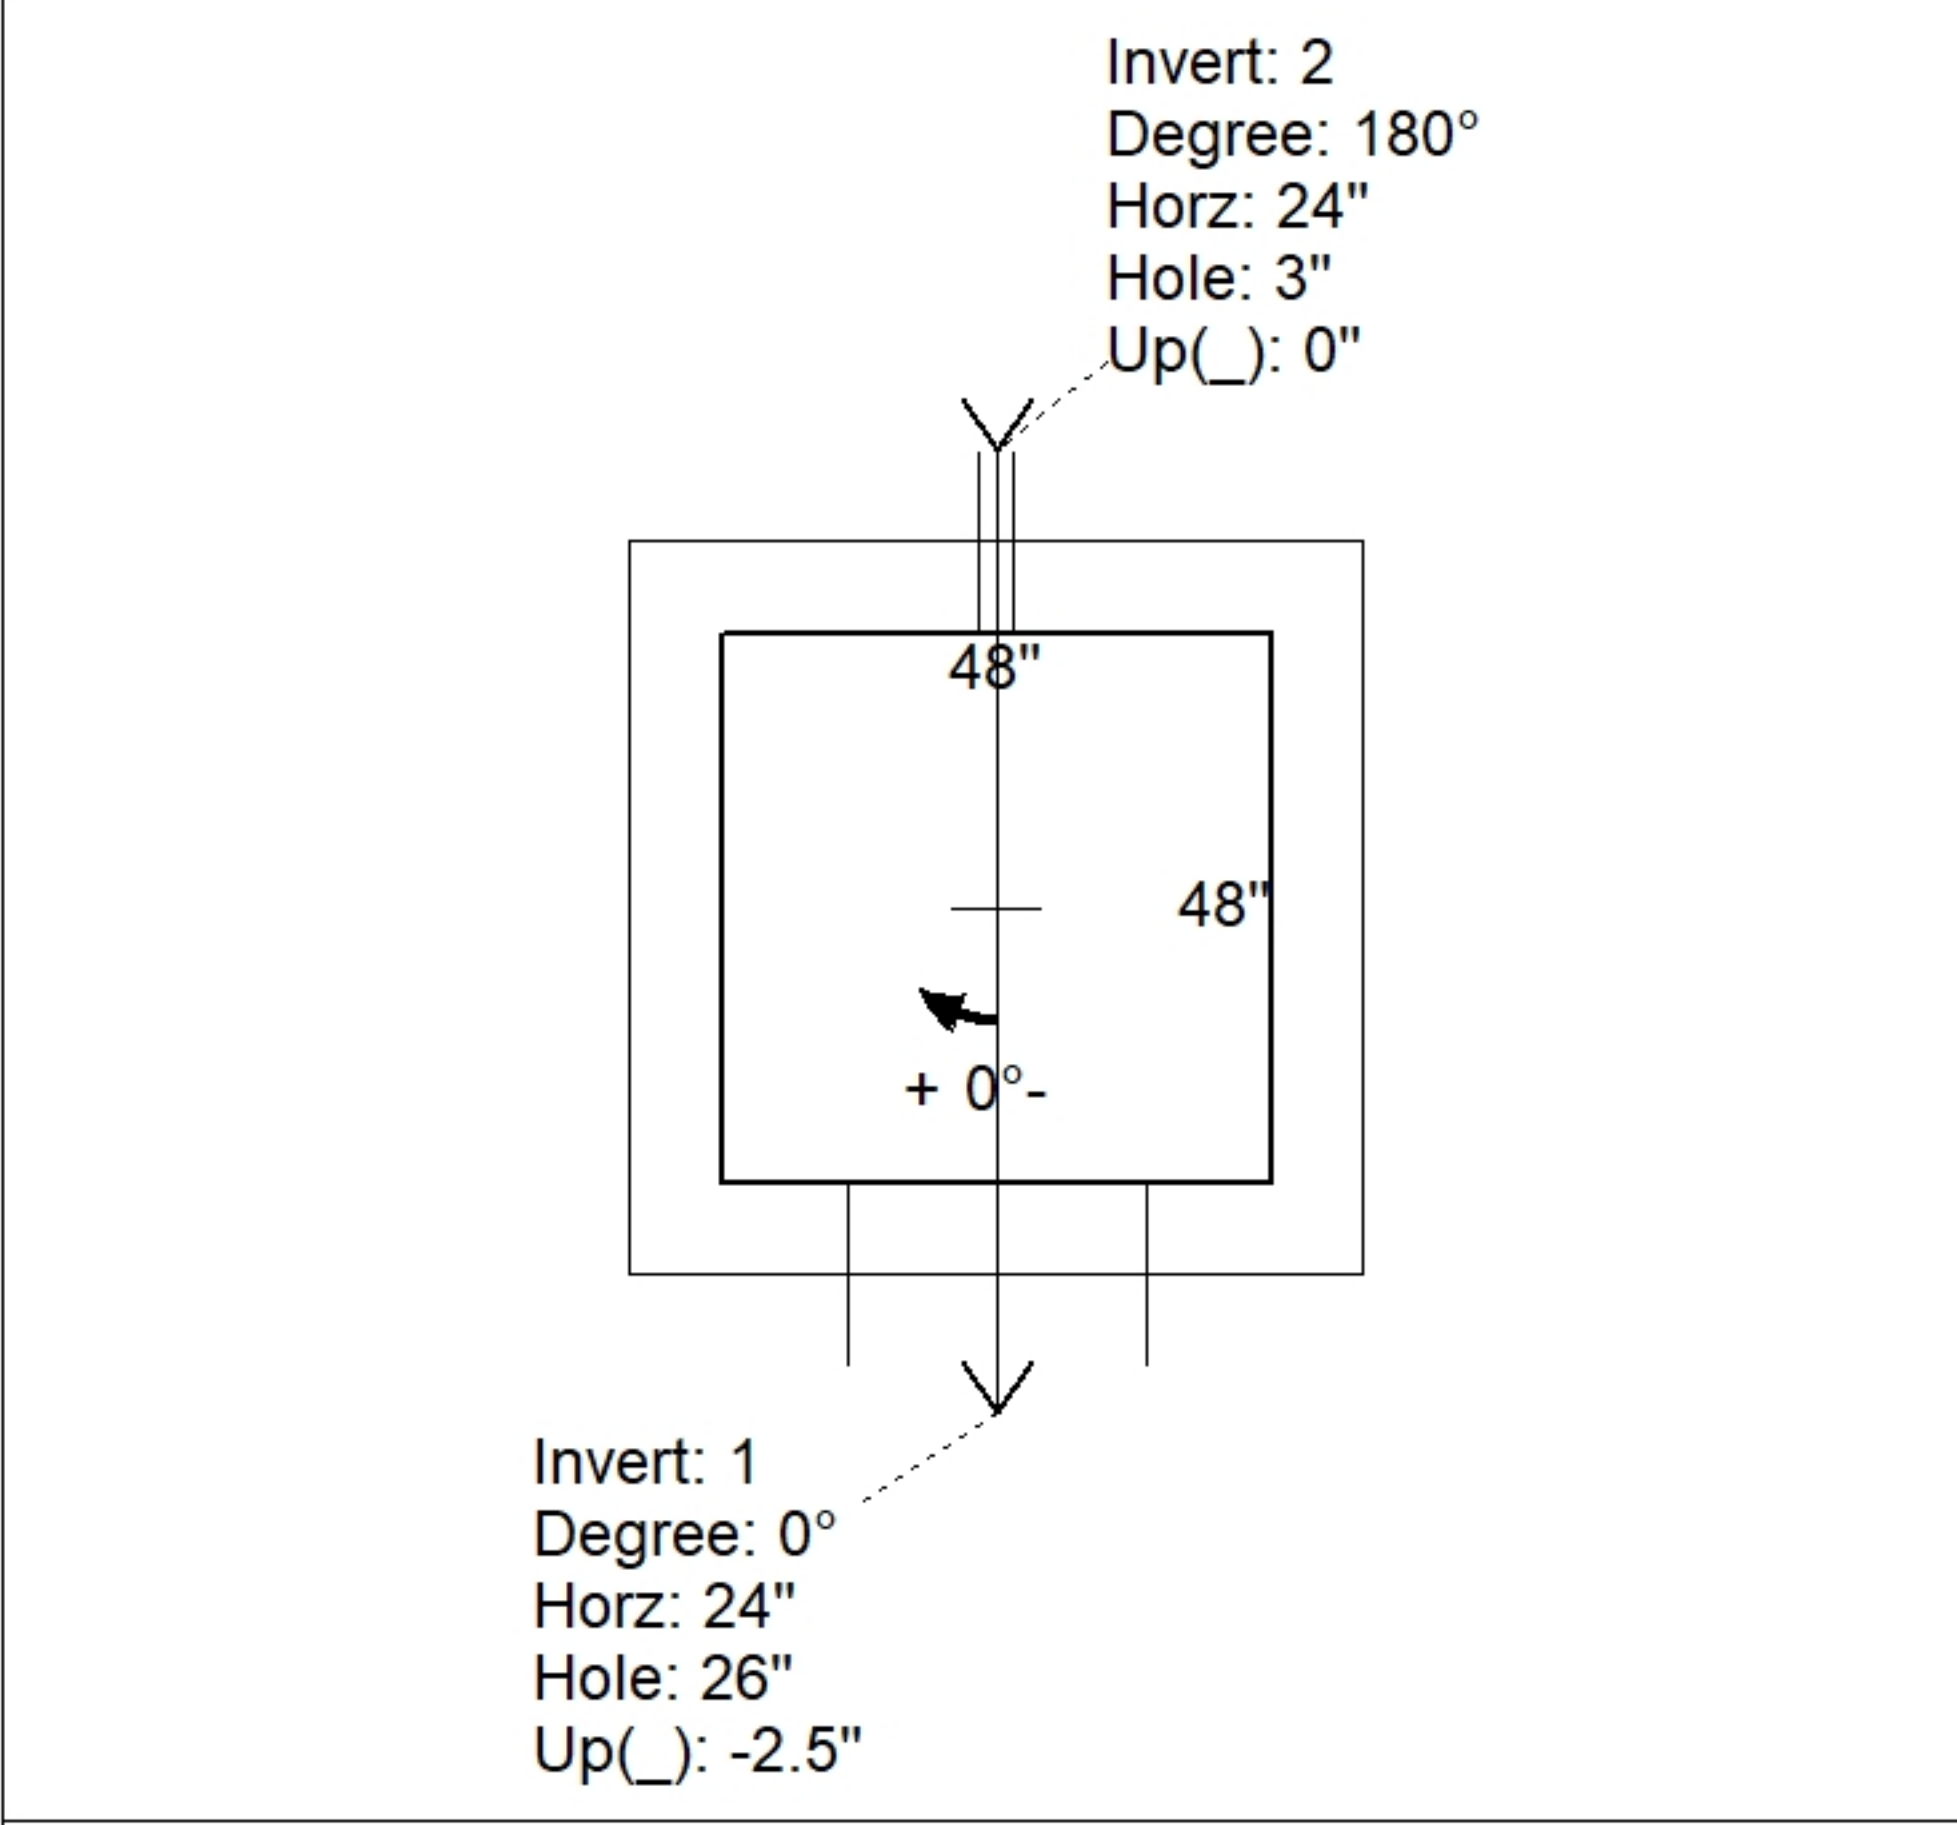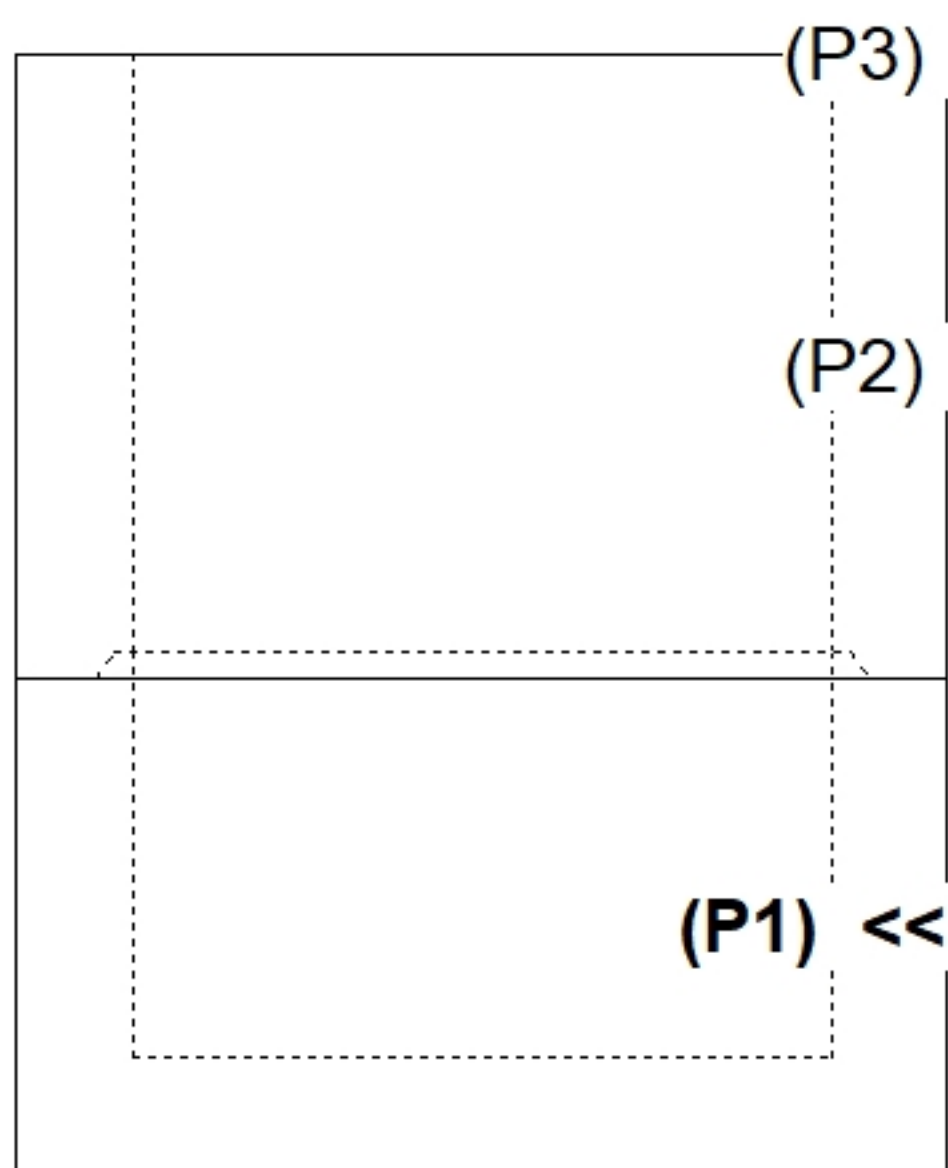

INSIDE WALL DIMENSIONS

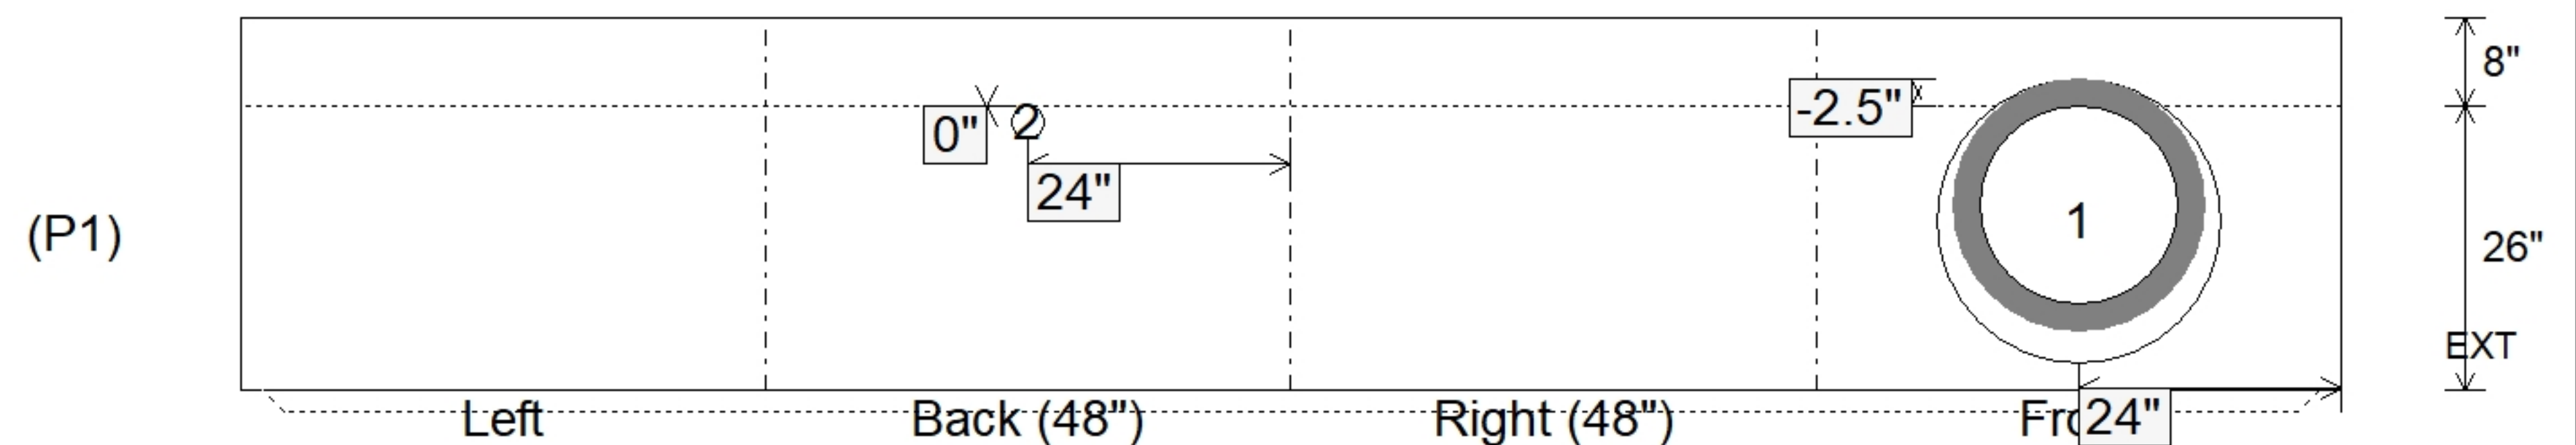

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 26" Height (Ext): 34"	Weight (Net): 6298 lb Volume (Net): 1.61cu.yd
----------------------------------	---------------------------------	--	--	--