

Structure ID: SCI 3

P2 MH048RS48

MH RISER T/G



P4) 28" x 28" - CASTING HEIGHT - 6" P3) 48" - MH FLAT TOP w/28"x28" Hole F/G - 12" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE T/n - 48" 2) 48" - SGL 1"x14.5' Butyl (2x) 2) Hole - 22 8) MH Step ML-10-TDS-NCR - 10"	0 lb 1368 lb 3353 lb 4354 lb 0 lb 0 lb 0 lb ----- Structure Total: 9075 lb
--	--

- Structure Notes:**
1. PER ASTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. NO INVERT CHANNEL.
 4. REINFORCING PER ASTM A615 (GRADE 60).
 5. CASTING BY OTHERS


Rim: 607.51' Rim to Invert: 9.72' Slack: 2.64" Sump: 0" Step Position: 270

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

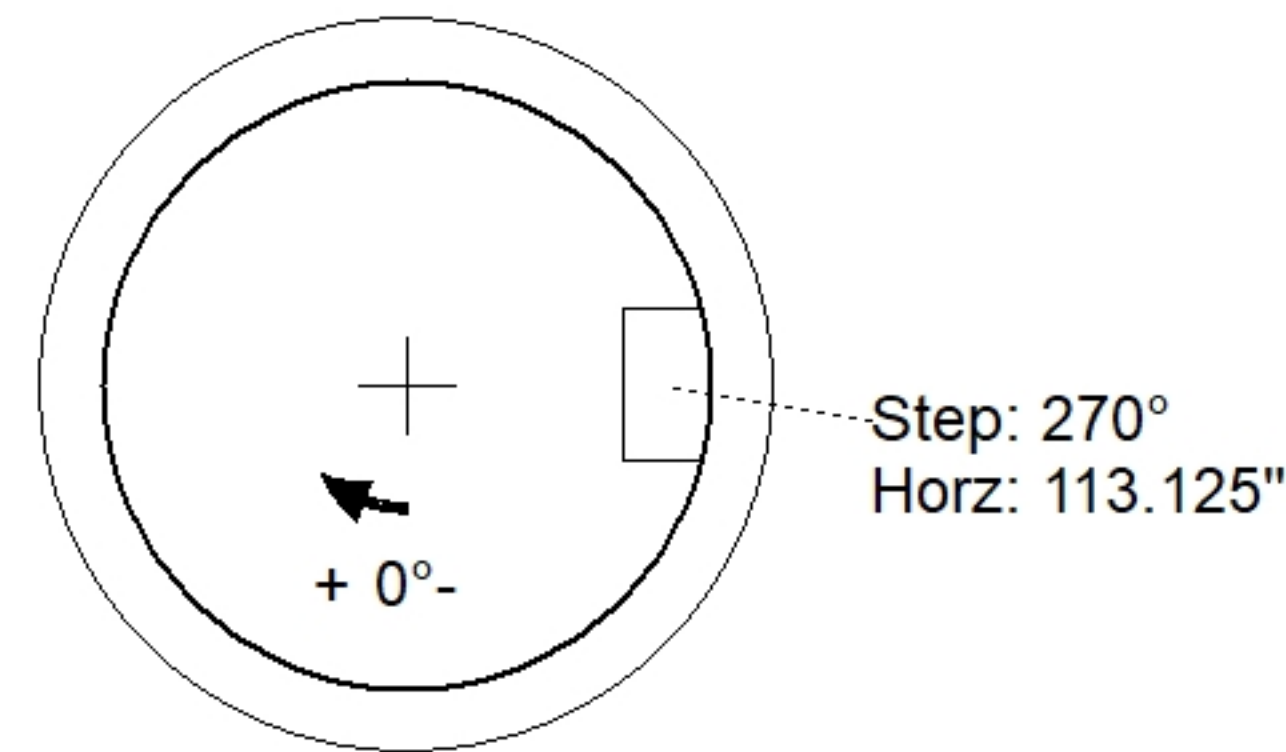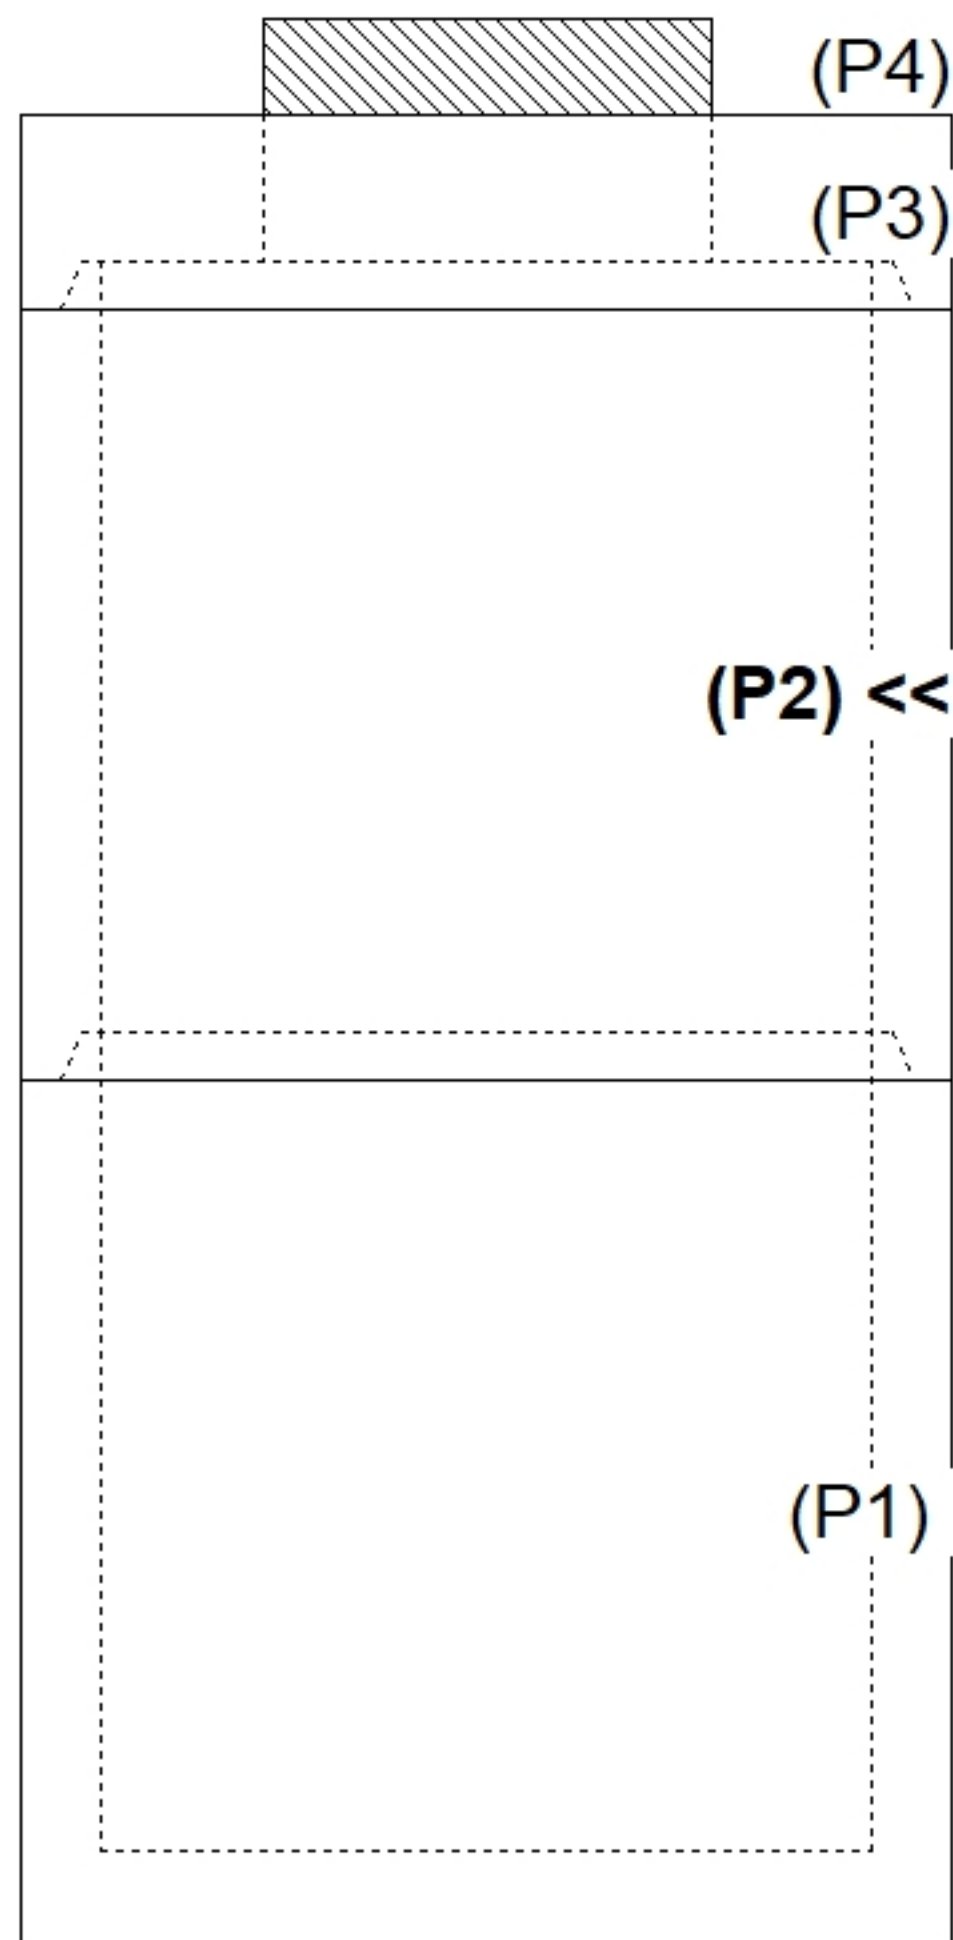

INSIDE WALL DIMENSIONS

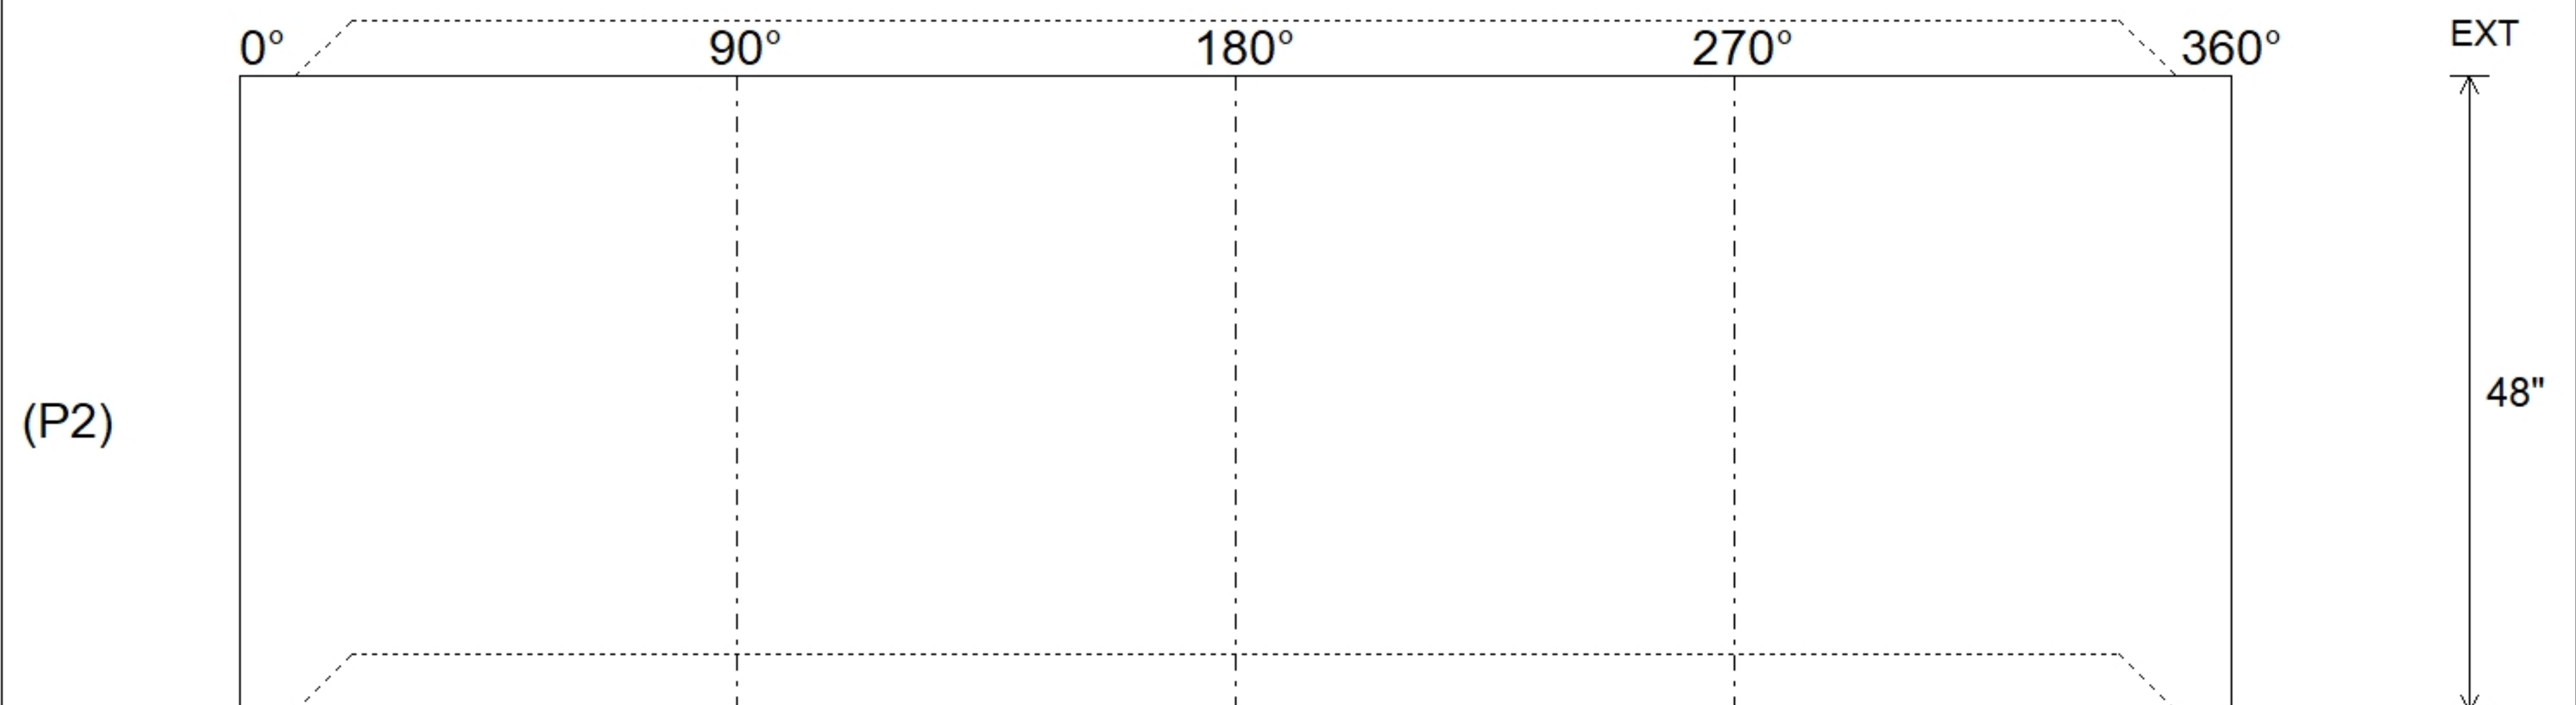

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"
Coating (Ext):			Weight (Net): 3353 lb Volume (Net): 0.86cu.yd