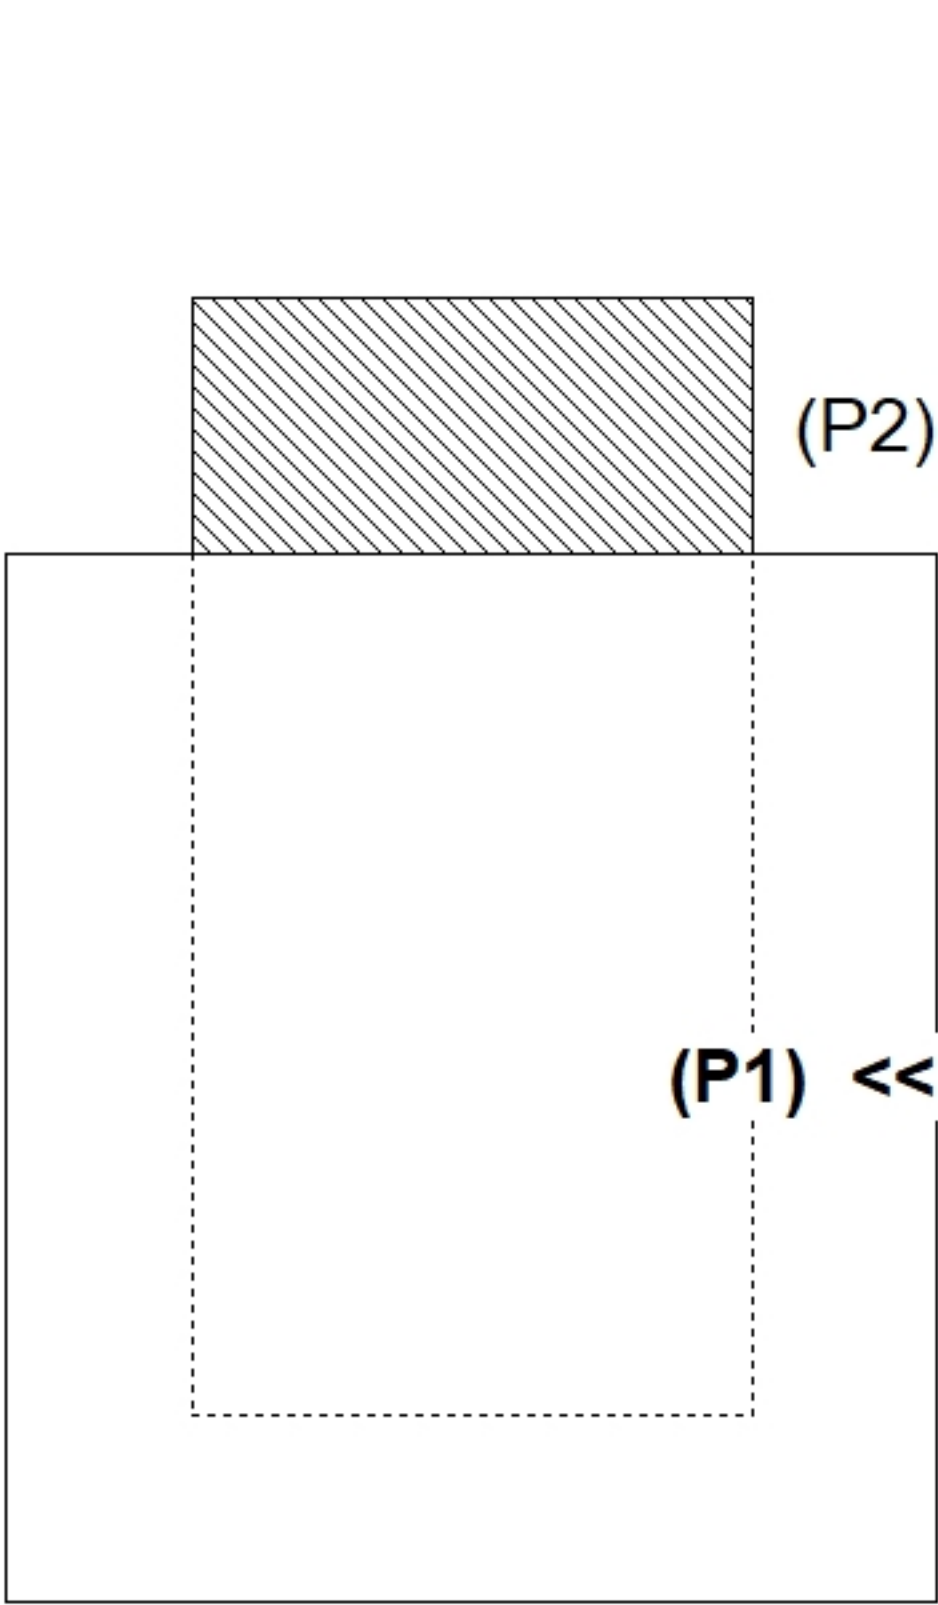
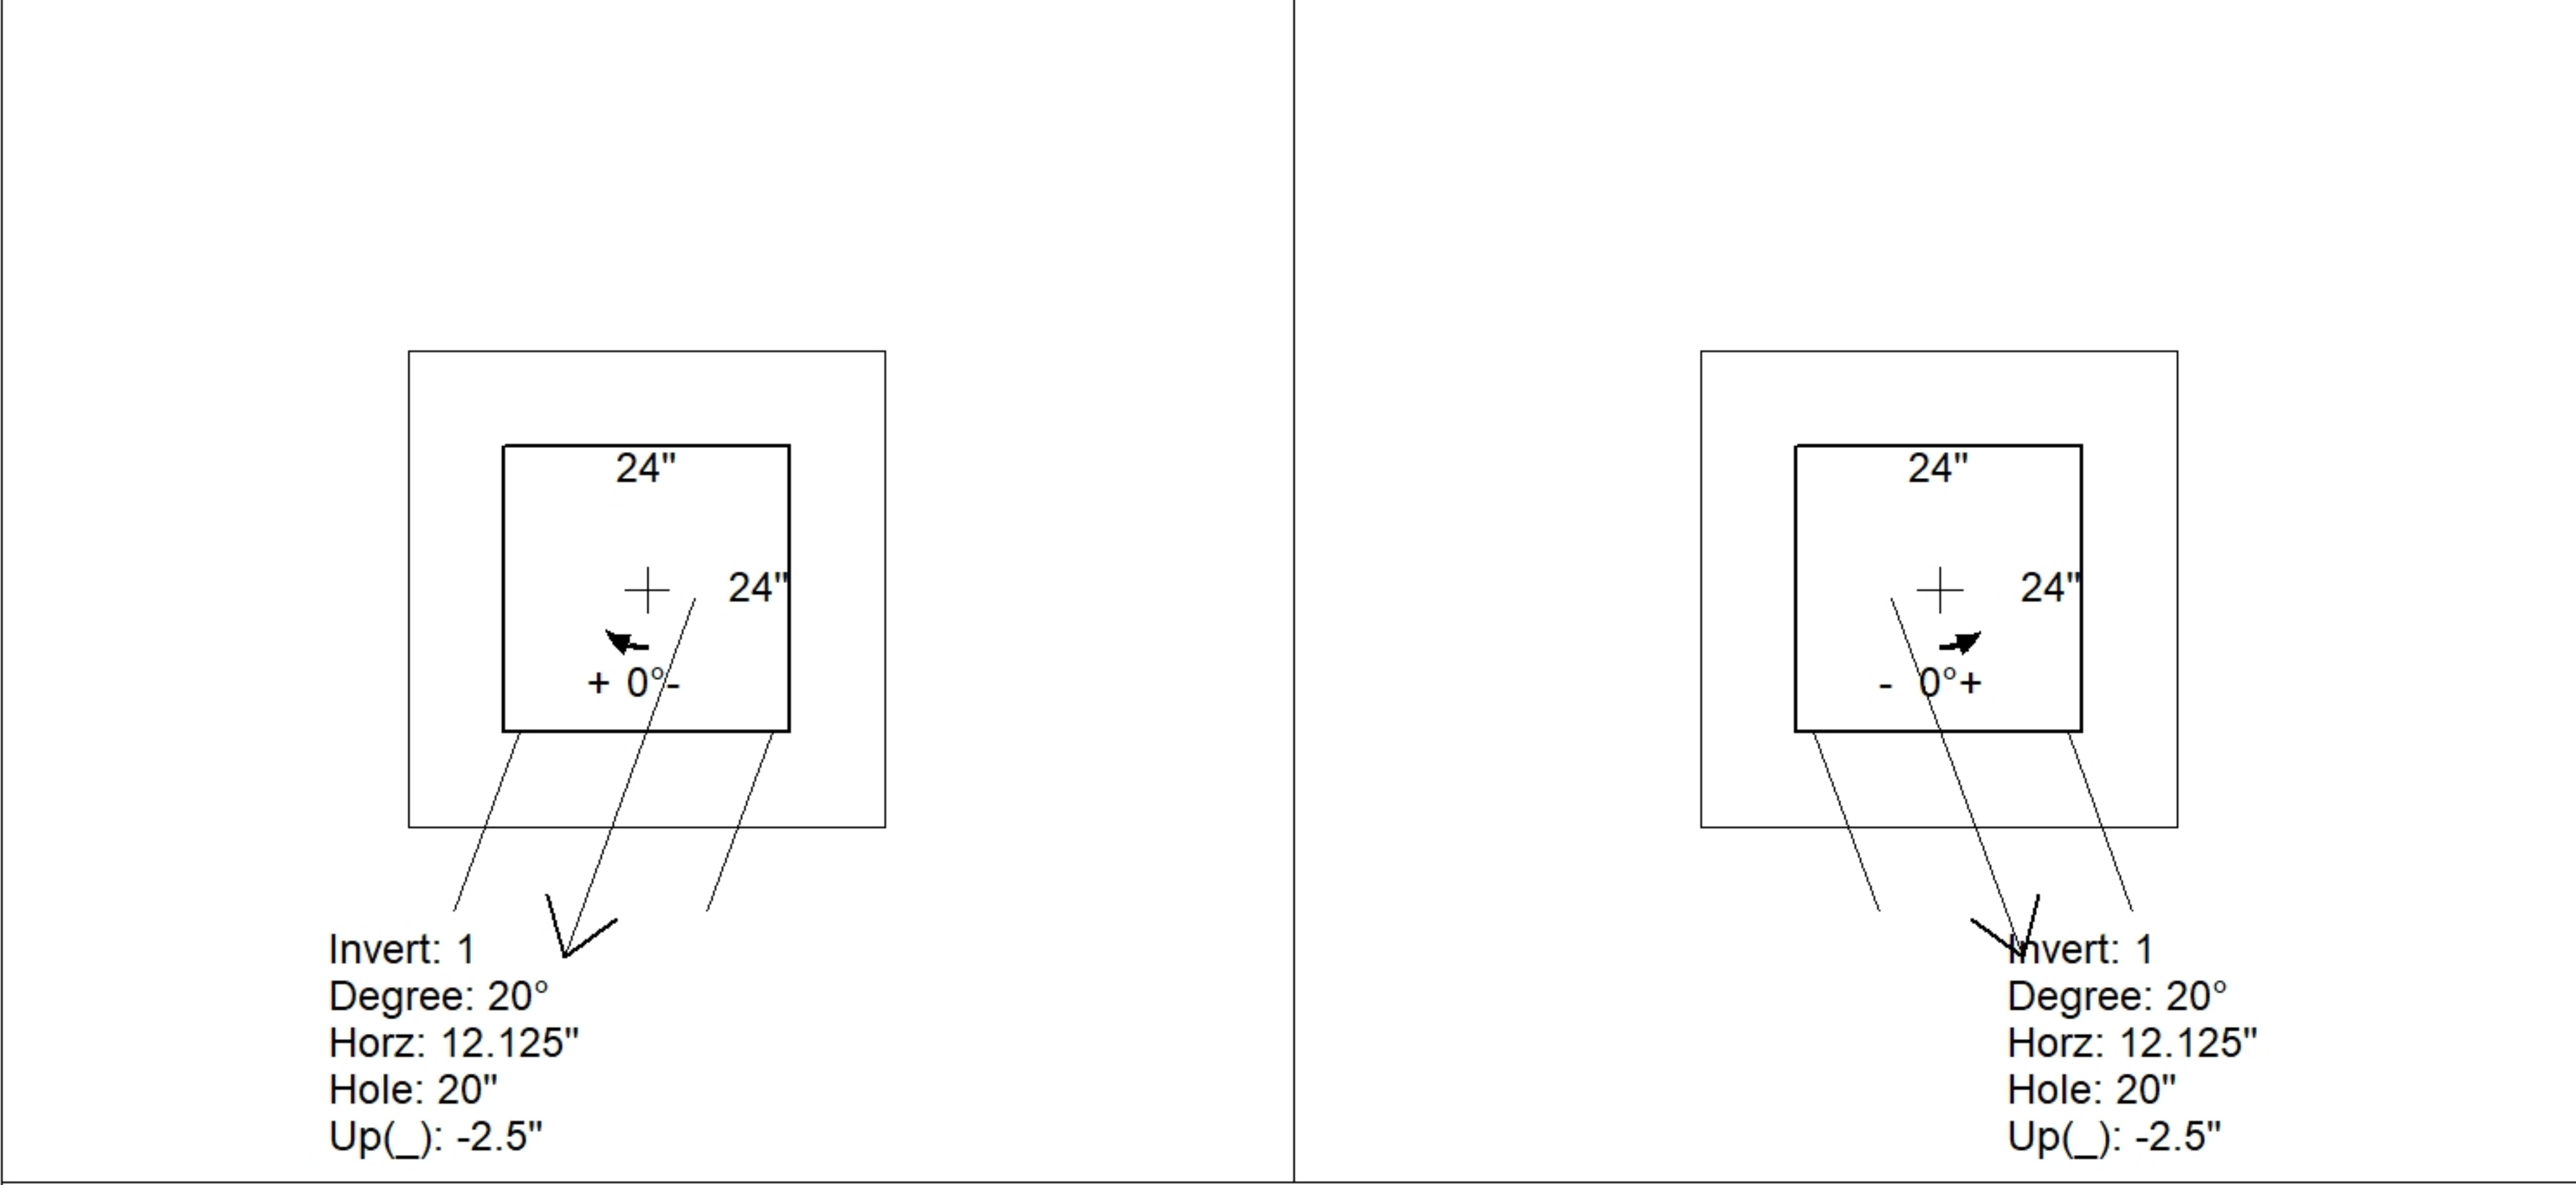
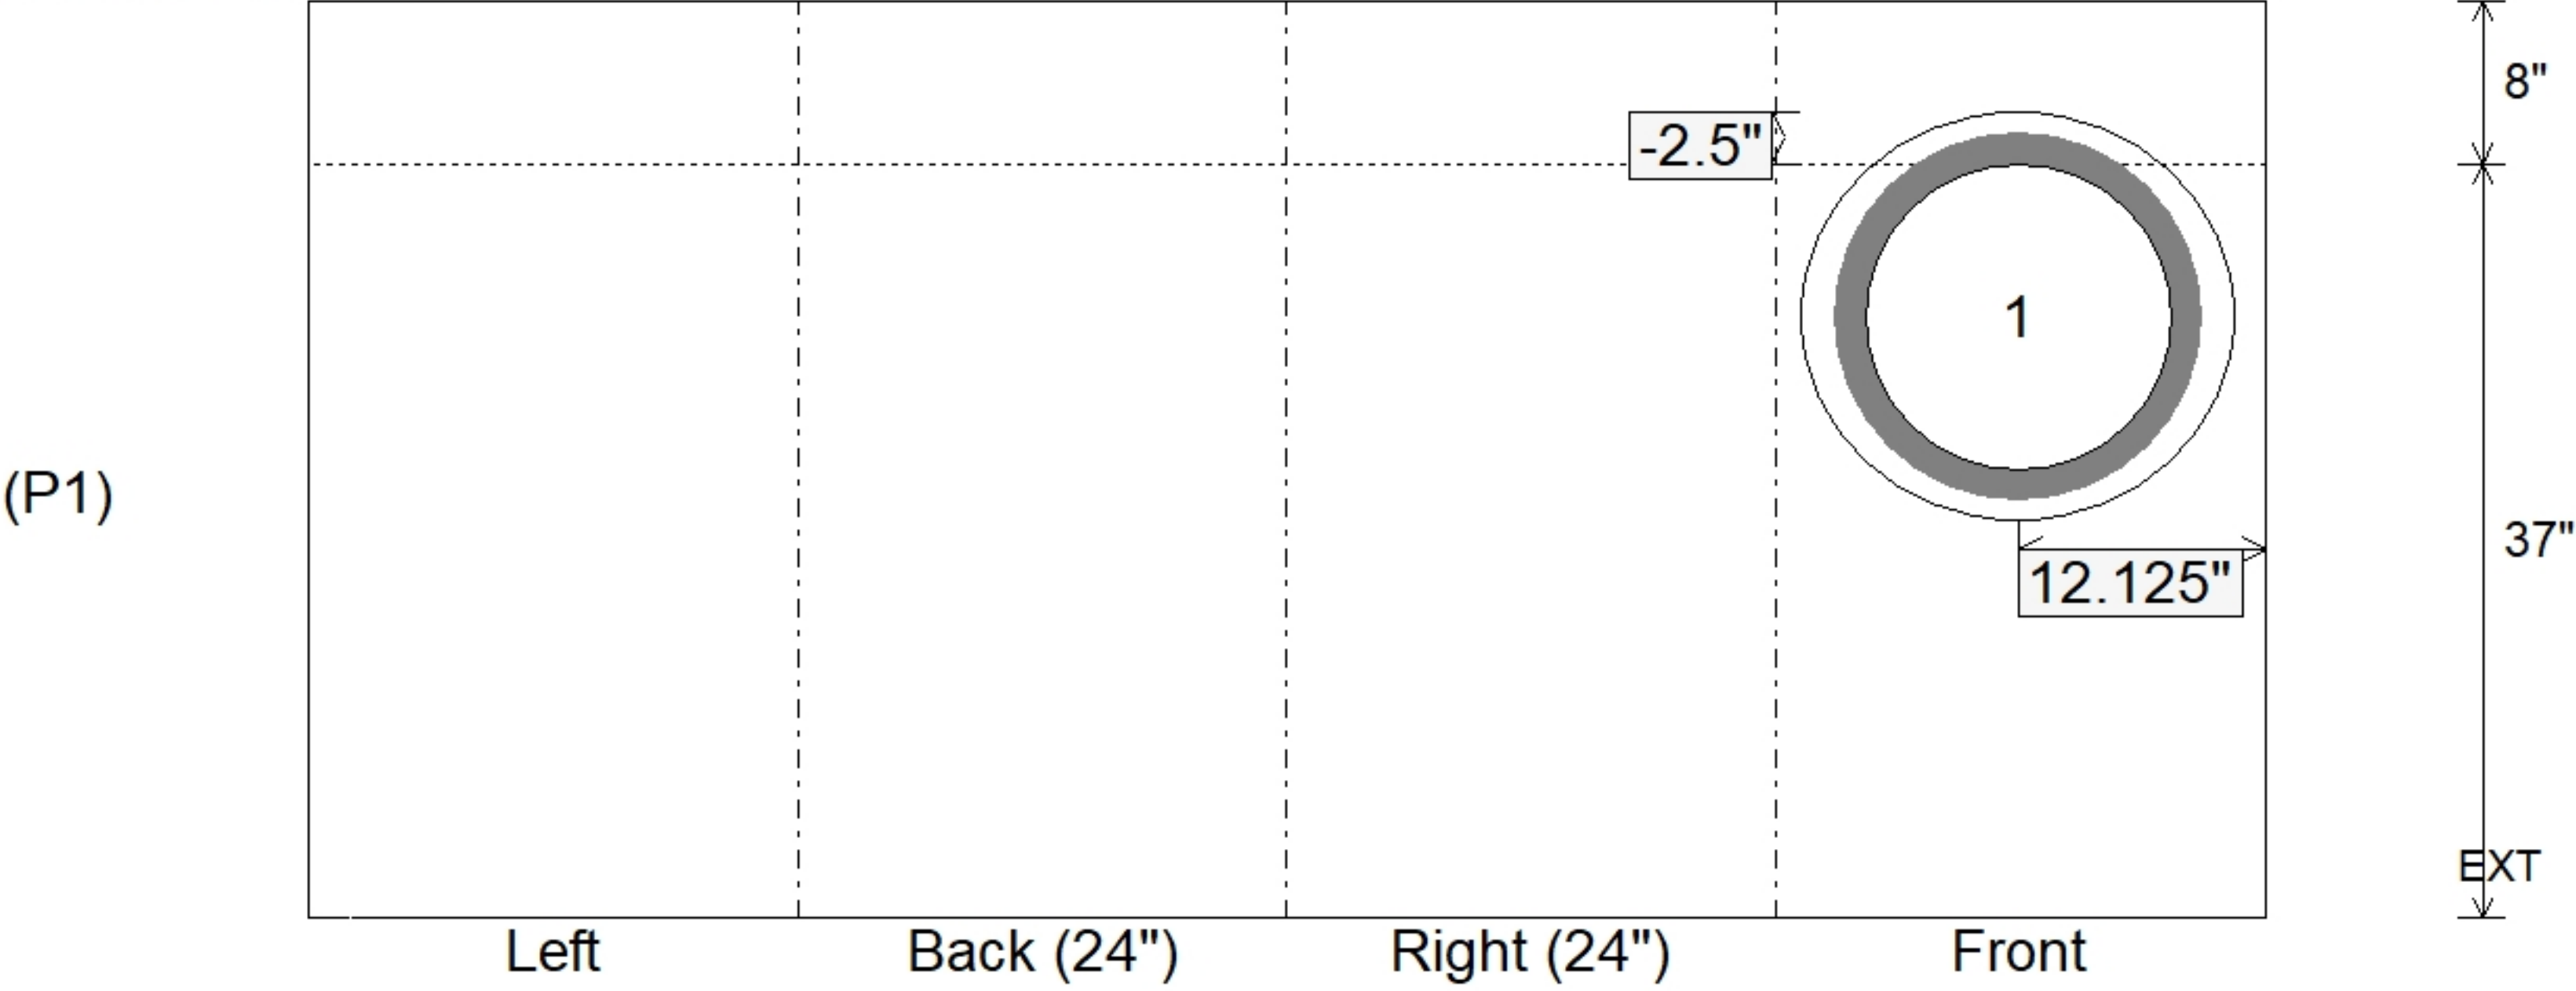


Job Name: 23-2404 Hampton Hills (Phase 1) Job Location: Richmond, KY Contractor: Seven Earthmovers LLC					Plant: 100 5/19/2026 12:59:21 PM		Tech: J. Horsley PC: C. Golf			
Structure ID: CBI-D1										
P1		BX2424-08BAVF			BOX BASE 8inW, 8inF, Variable Ht F/n					
P2) 24" x 24" - CASTING HEIGHT - 11" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 37" 1) CASTING - HOE KY-465 SET (CBI TY F) 1) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 20					0 lb 4029 lb 465 lb 0 lb 0 lb ----- Structure Total: 4494 lb		Structure Notes: 1. PER KYTC CBI F / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-465 F/G/H) SHIPPED LOOSE. REINFORCING PER ASTM AS615 (GRADE 60). - BASE WALLS (As .31) #5 BARS AT 12" C.C.E.W. - BASE FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 885.73' Rim to Invert: 4' Slack: 0" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (⌋)	Offset
Invert 1	881.73'	20°	23"	15" ADS N-12	18"	Hole 20	20"	21.284"	-2.5"	-4"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions)					UPSIDE-DOWN VIEW (int. dimenions)					
										
INSIDE WALL DIMENSIONS										
										
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 37" Height (Ext): 45"		Weight (Net): 4029 lb Volume (Net): 1.03cu.yd	