

**Structure ID: CB6**

**P1 BX2436-08BVF**

**BOX BASE 8inW, 8inF, Variable Ht F/n**

P2) 24" x 36" - CASTING HEIGHT - 6" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 37" 1) 24" x 36" - SGL 1"x14.5' Butyl 2) Hole - 24"	0 lb 4425 lb 0 lb 0 lb ----- Structure Total: 4425 lb
---	--

**Structure Notes:**



1. JR HOE HOE-525-LV PROVIDED BY ICAST.
2. PER ASTM C913 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).  
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.  
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 356.2'    Rim to Invert: 3.6'    Slack: 0.2"    Sump: 0"    Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	352.6'	300°	32.875"	18" HDPE	21.2"	Hole 24	24"	27.713"	-1.625"	-4"
Invert 2	352.7'	130°	32.125"	18" HDPE	21.2"	Hole 24	24"	31.33"	-0.375"	-8.209"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

**UPSIDE-DOWN VIEW (int. dimensions)**

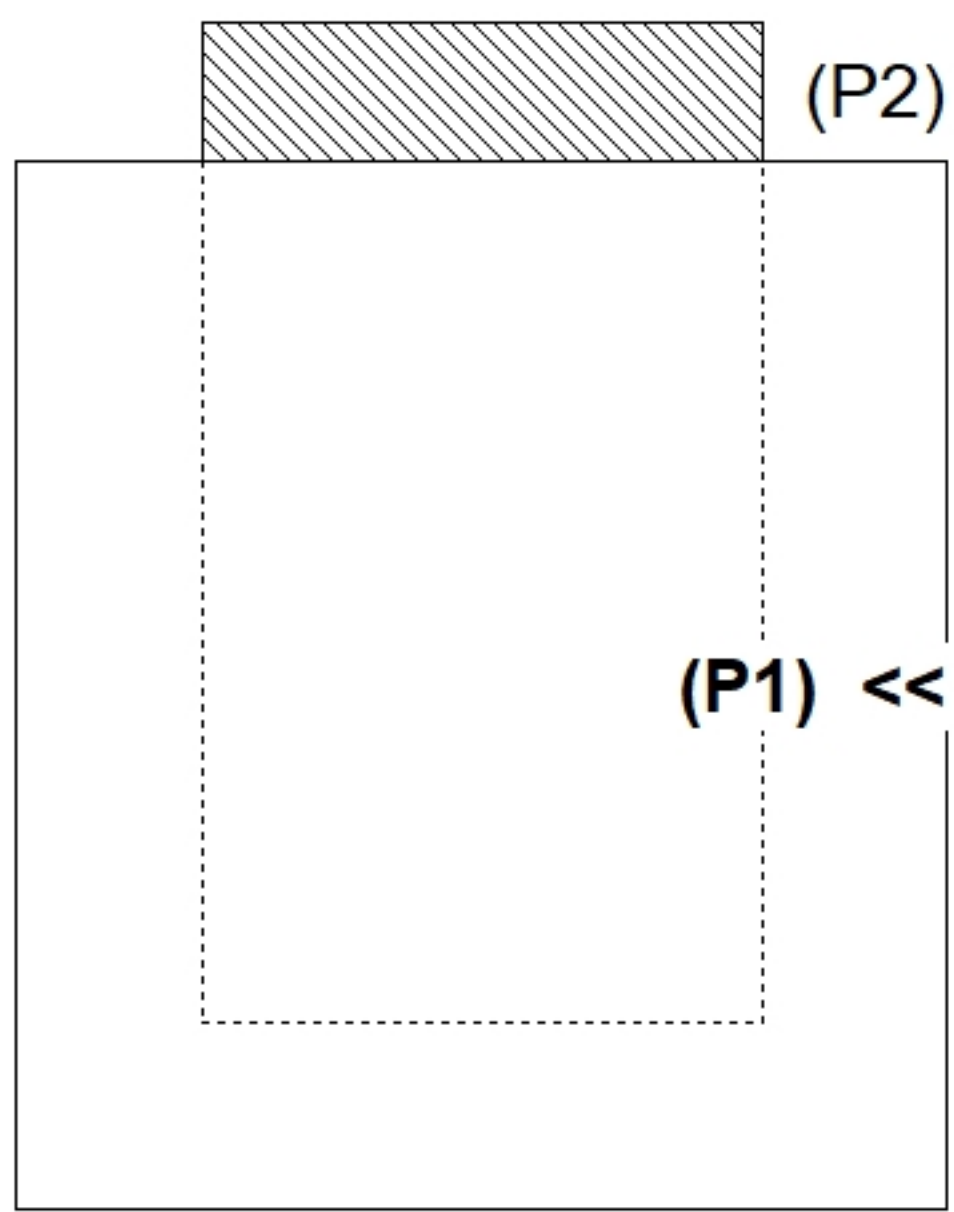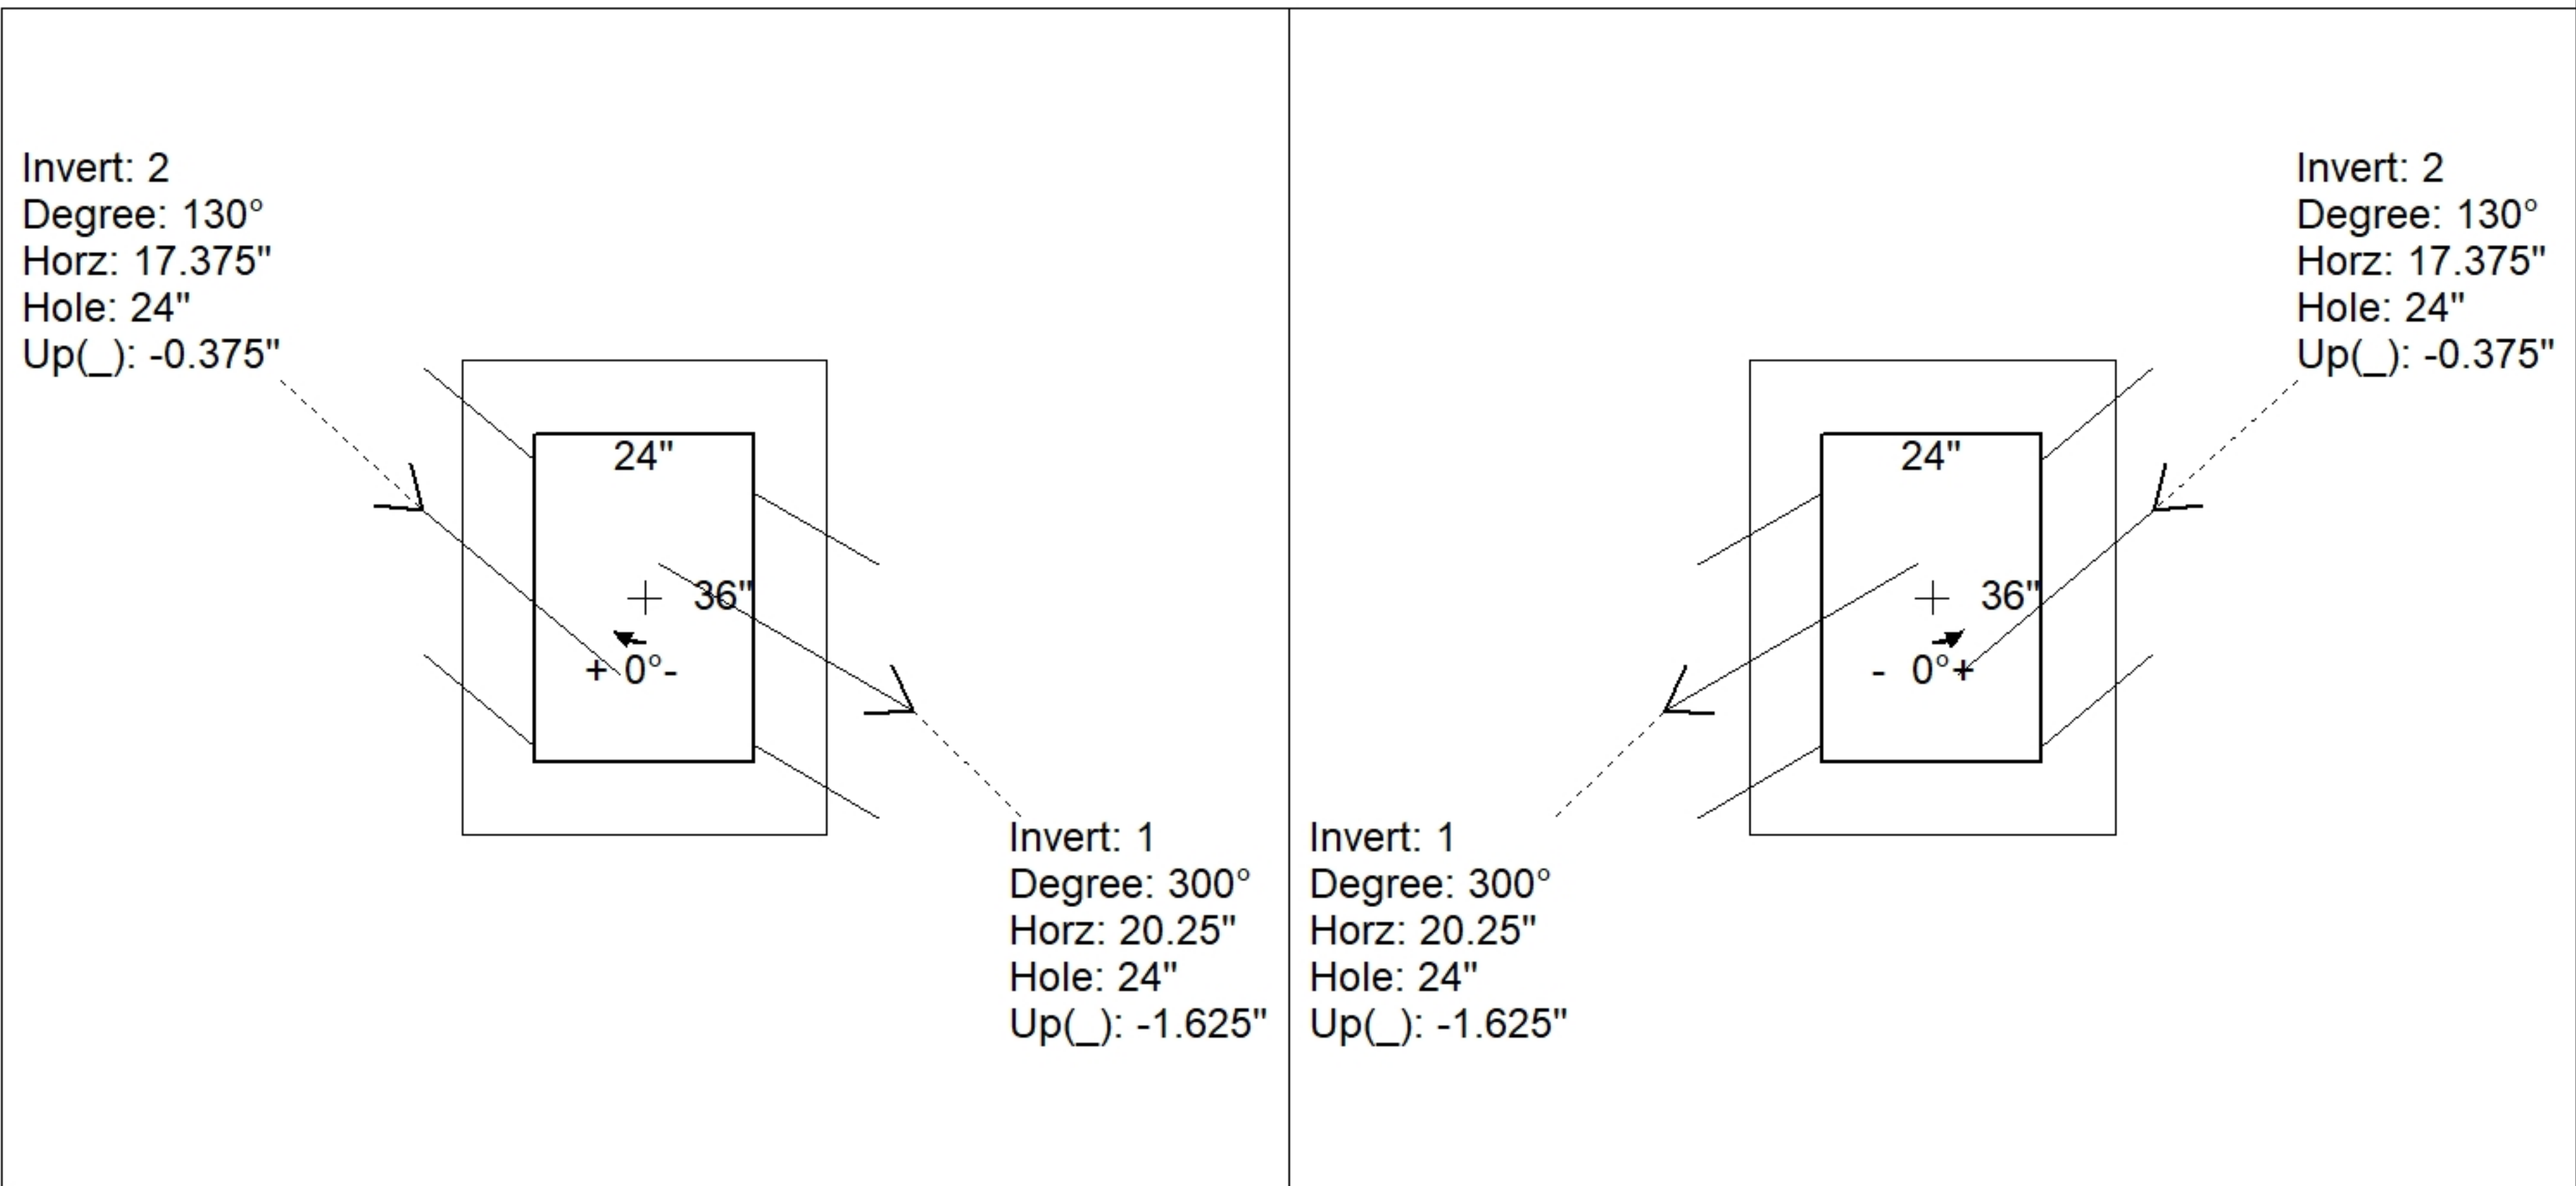

**INSIDE WALL DIMENSIONS**

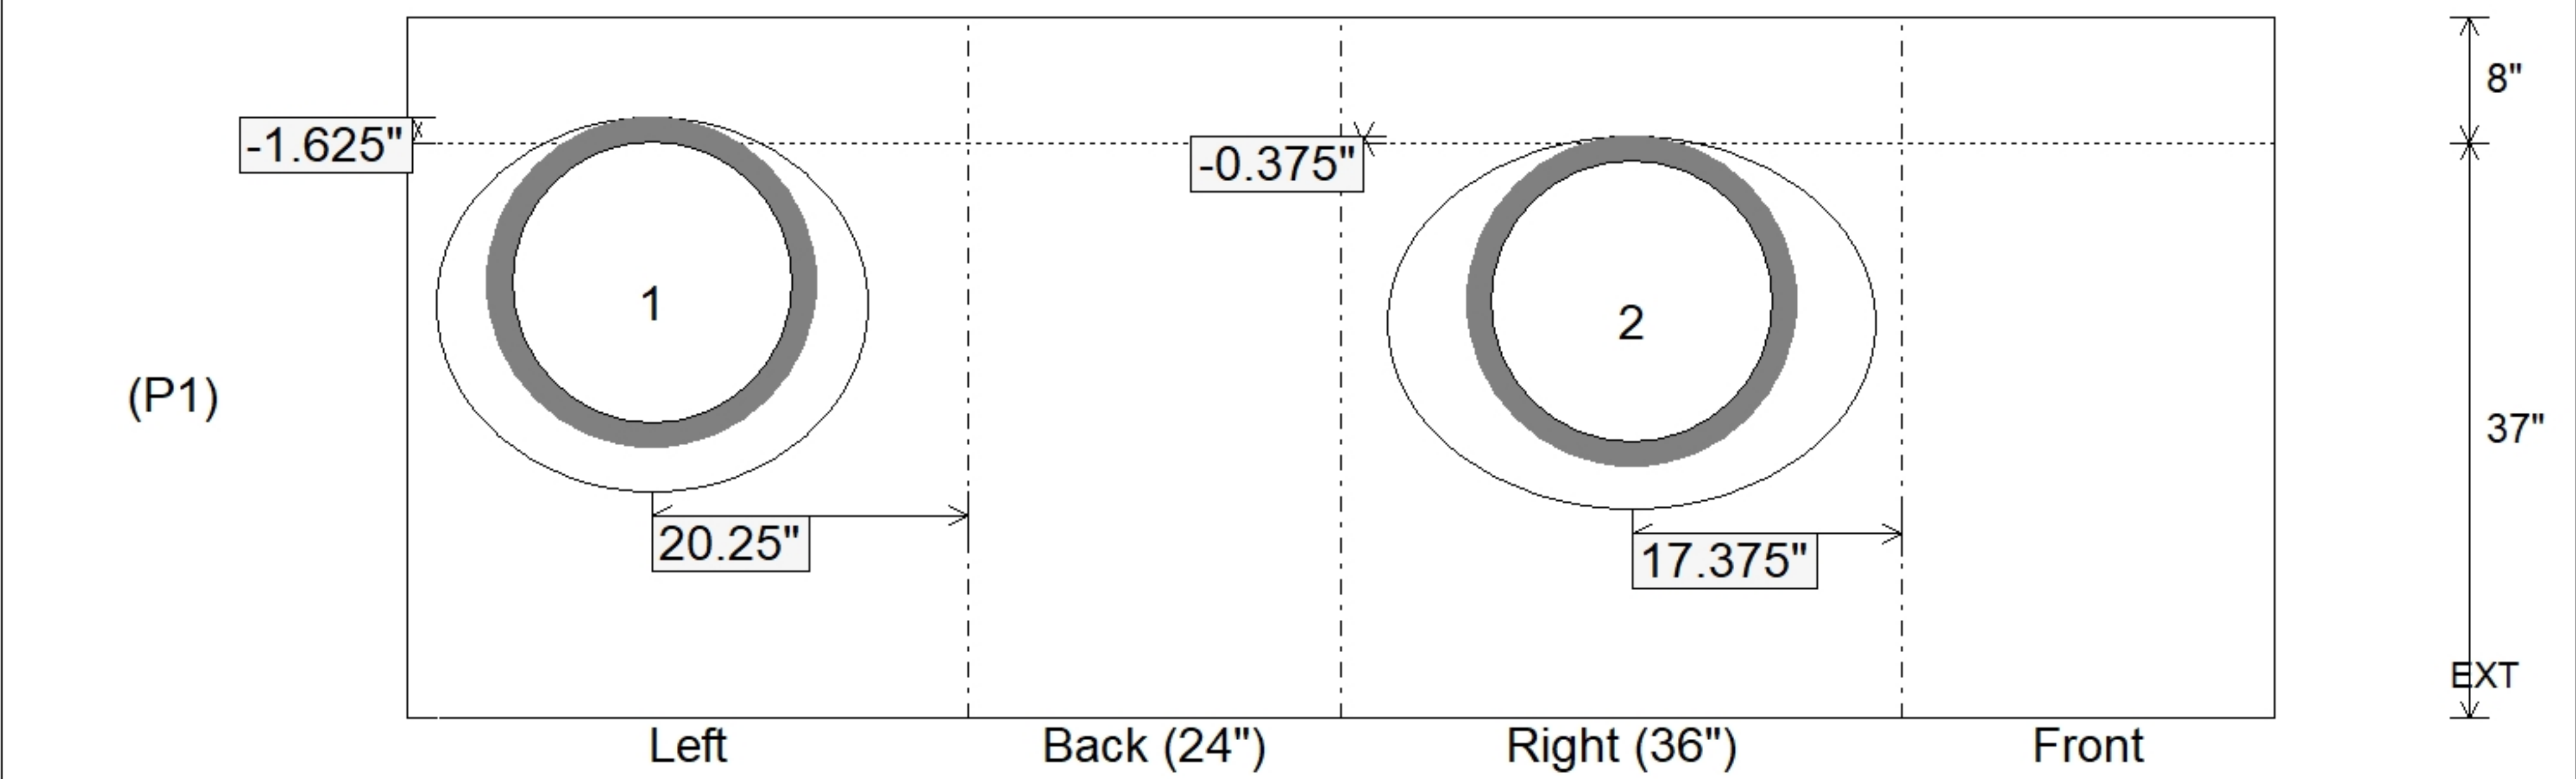

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 37" Height (Ext): 45"	Weight (Net): 4425 lb Volume (Net): 1.13cu.yd
----------------------------------	-------------------------------	--	--	--