

**Structure ID: OUT**

**P1 BX4848-08BAVF**

**BOX BASE 8inW, 8inF, Variable Ht F/n**

P2) 48" x 48" - CASTING HEIGHT - 0" P1) 48" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 45" 1) 48" x 48" - Conseal CS-102 1.00" 1) Hole - 30 1) Hole - 6 1) Weir n/n - 12"x15"	0 lb 8902 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8902 lb
--	--

**Structure Notes:**




1. TRASH RACK LFG-48-P PROVIDED BY ICAST.
2. PER ASTM C913 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).  
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.  
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 354.8'      Rim to Invert: 3.8'      Slack: 0.6"      Sump: 0"      Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	351'	0°	32"	24" HDPE	27.8"	Hole 30	30"	30"	-1.875"	0"
Invert 2	351'	180°	32"	3" HDPE	3.5"	Hole 6	6"	6"	-0.25"	0"
Invert 3	353.5'	180°	32"	12" x 15" Weir	12" x 15"	Weir 12"x15"	12" x 15"	12"	30"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

**UPSIDE-DOWN VIEW (int. dimensions)**

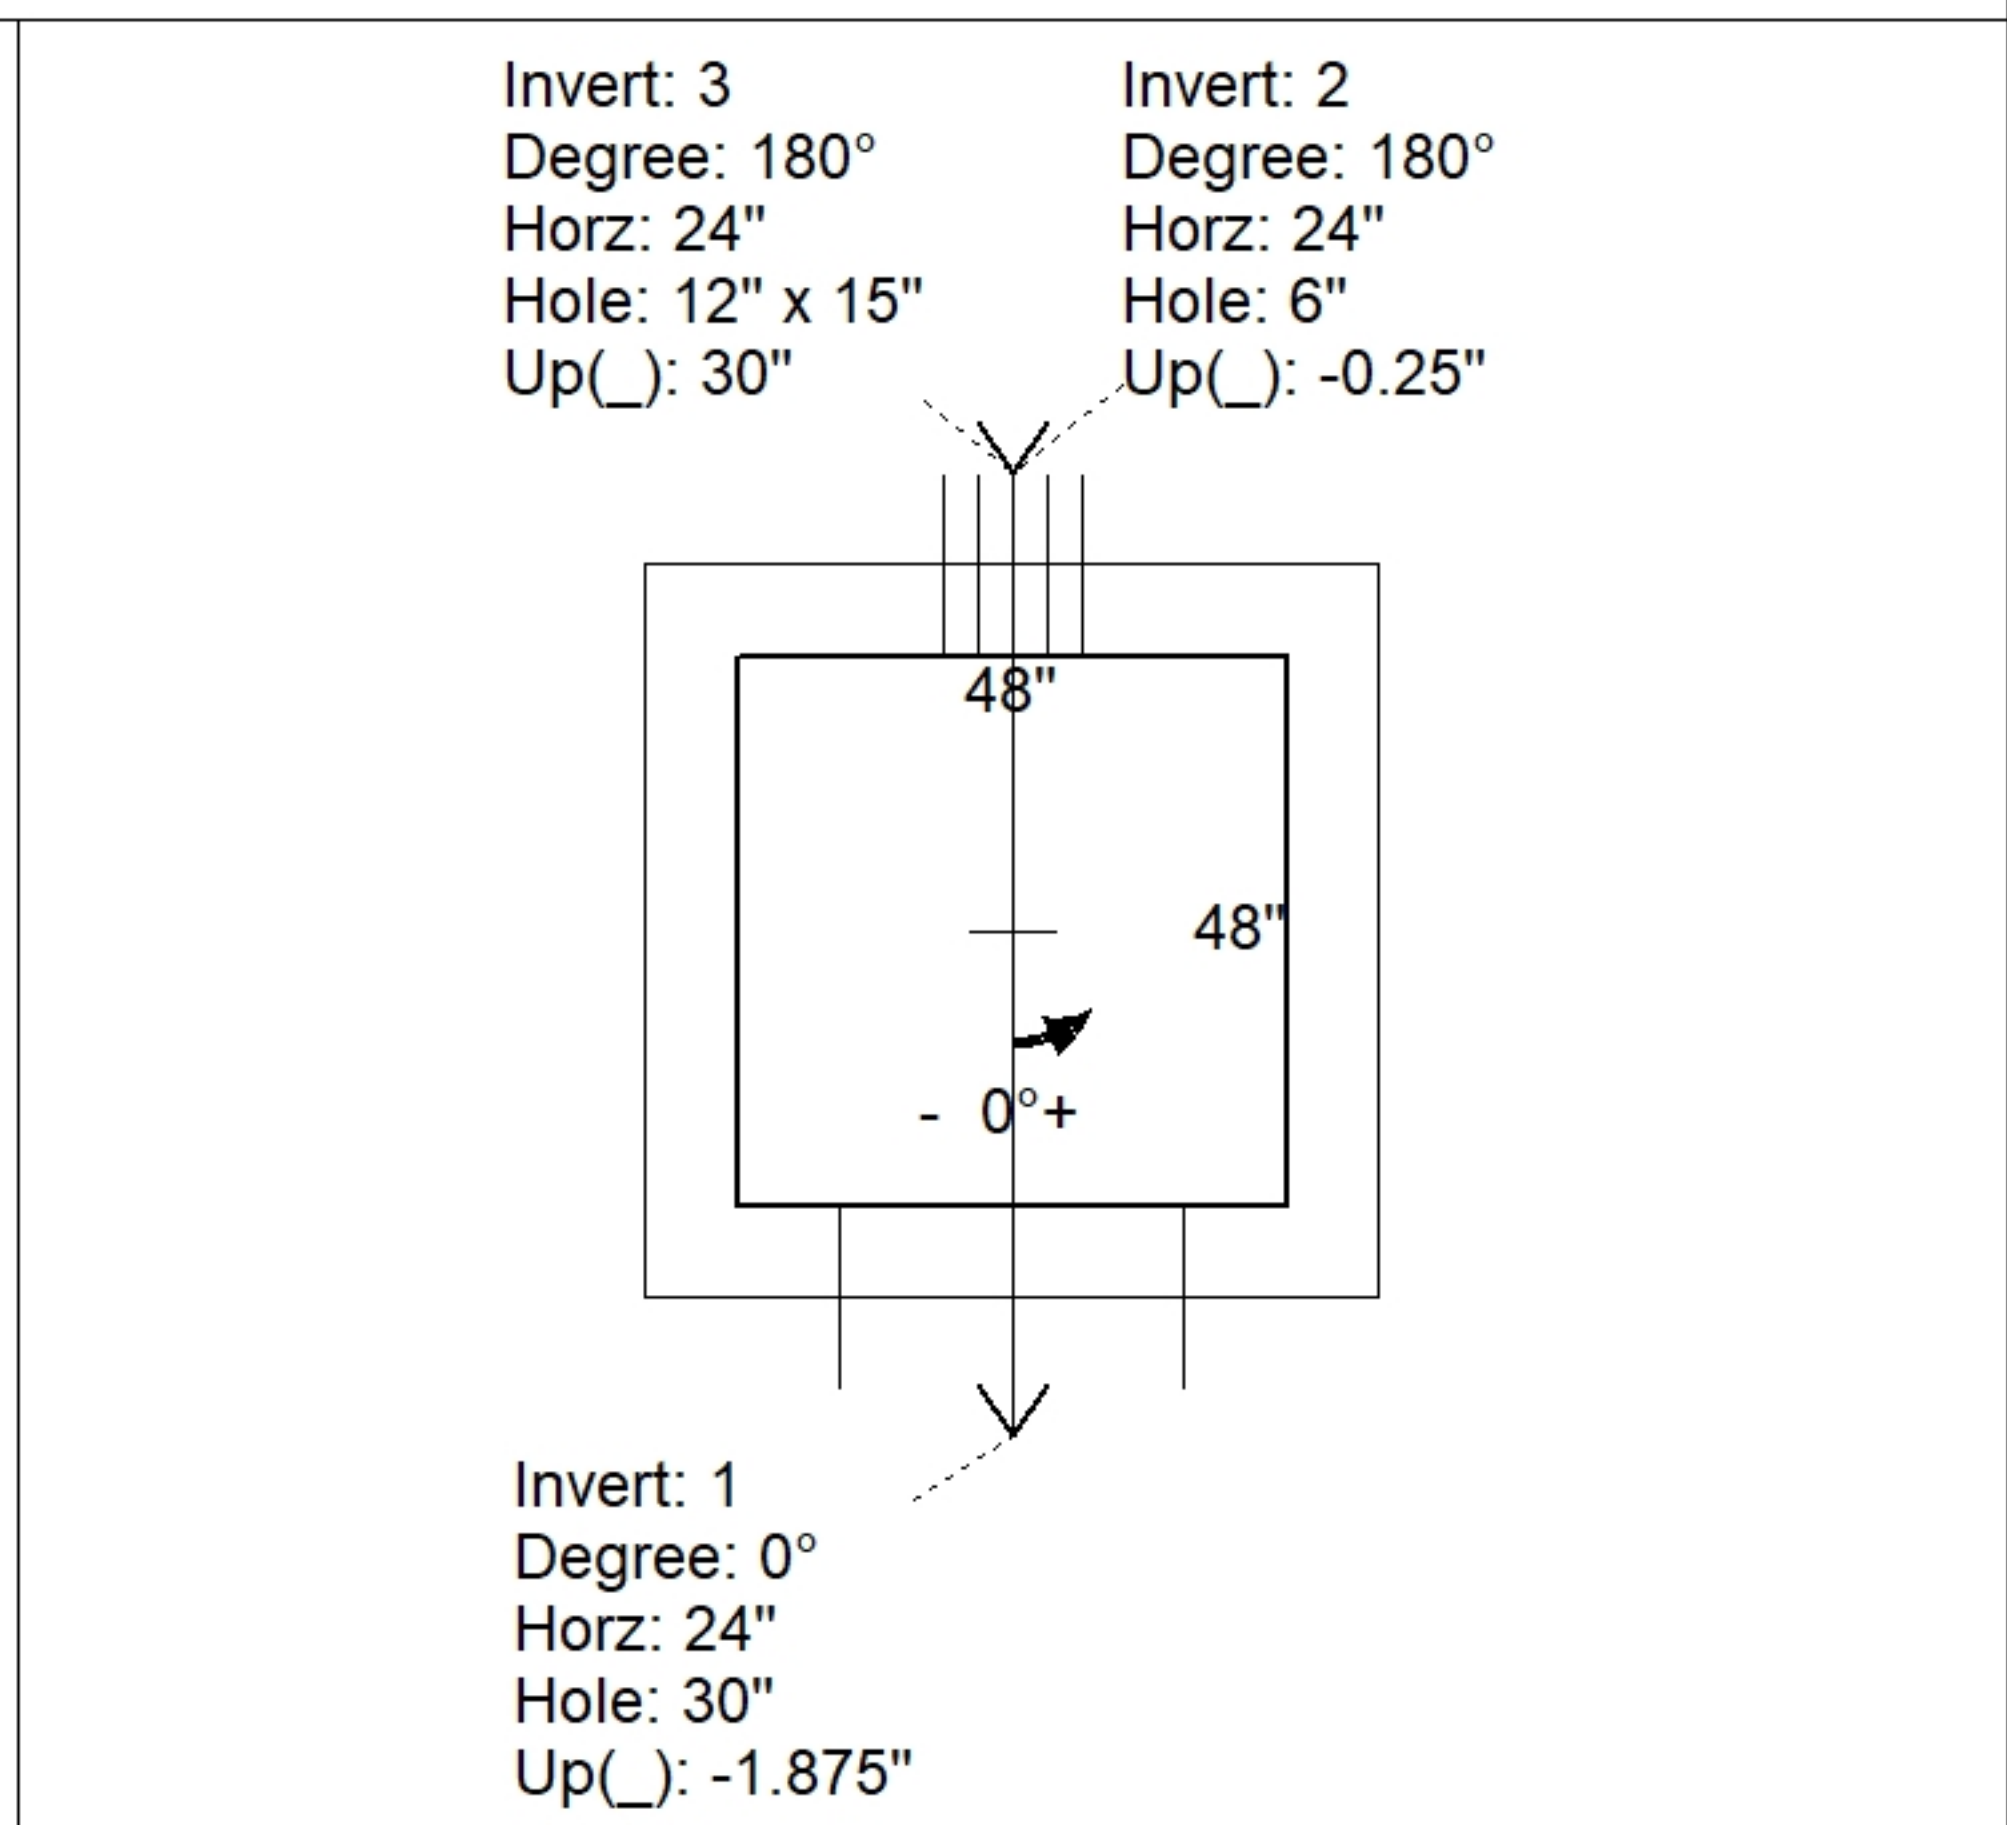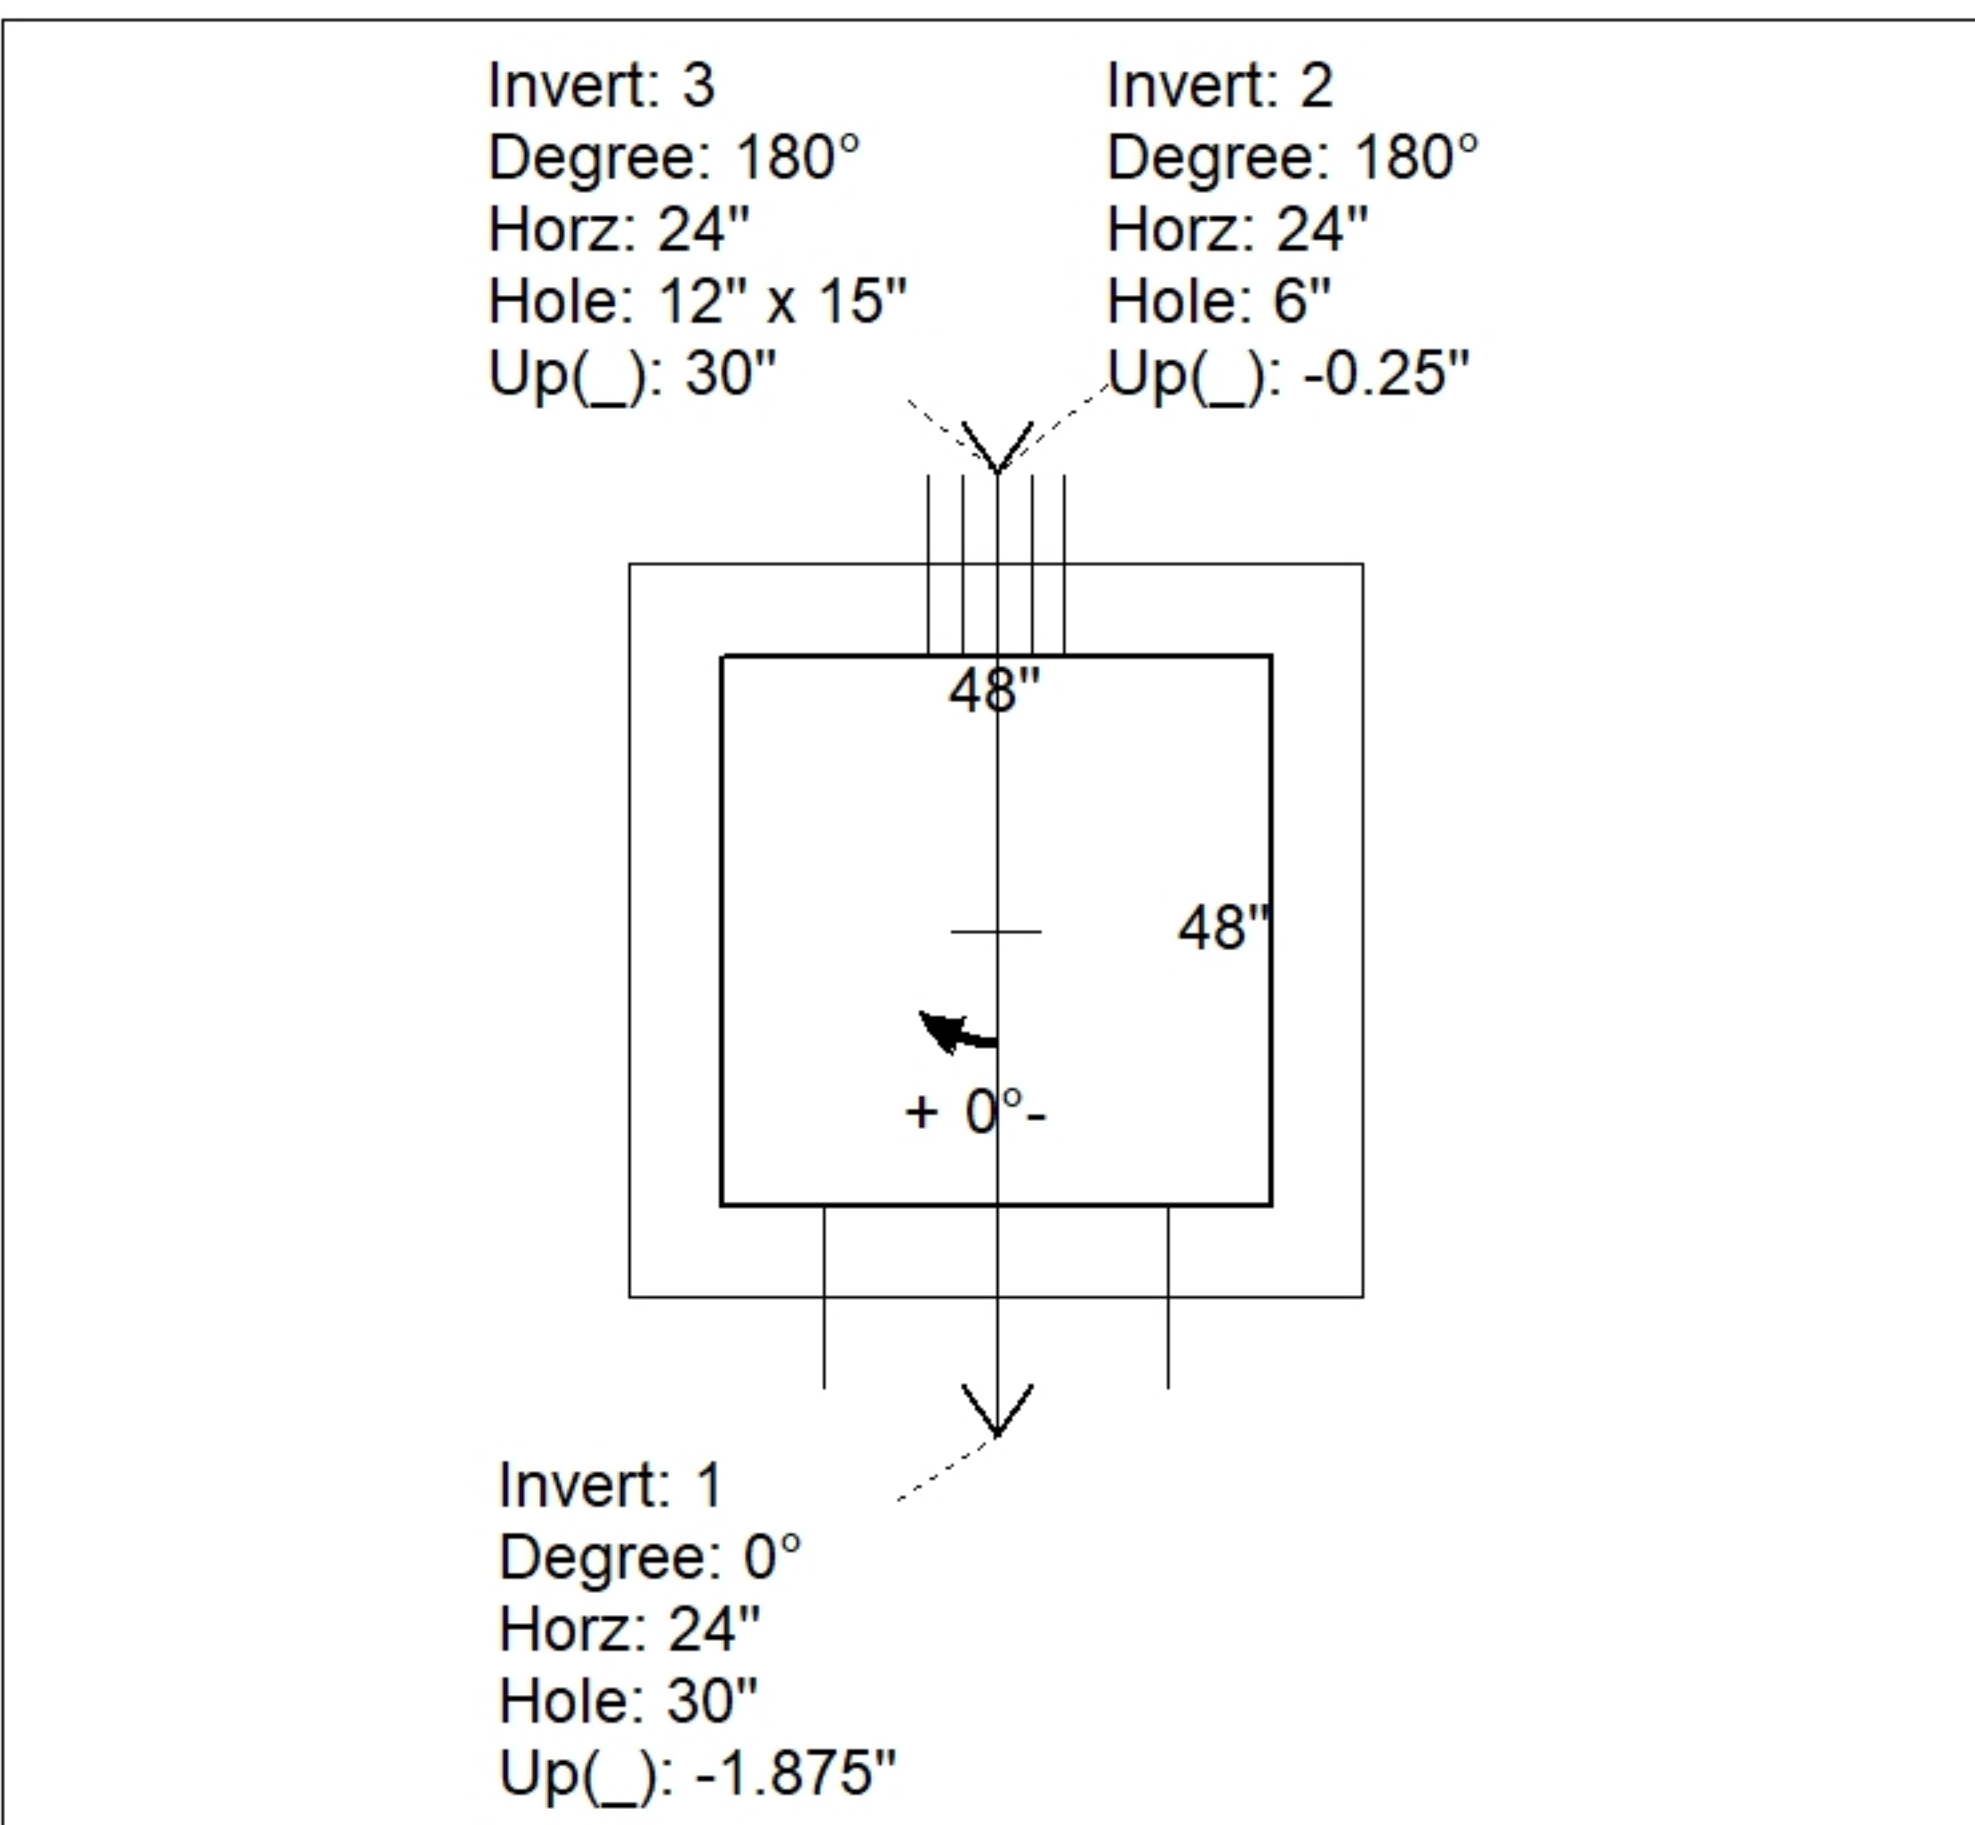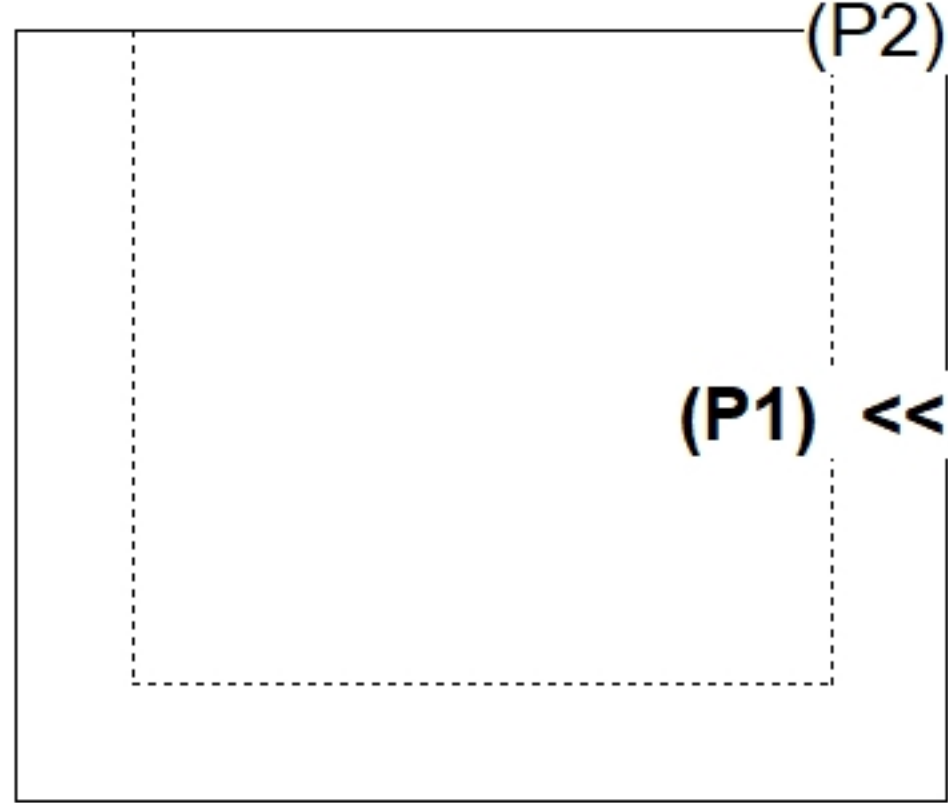

**INSIDE WALL DIMENSIONS**

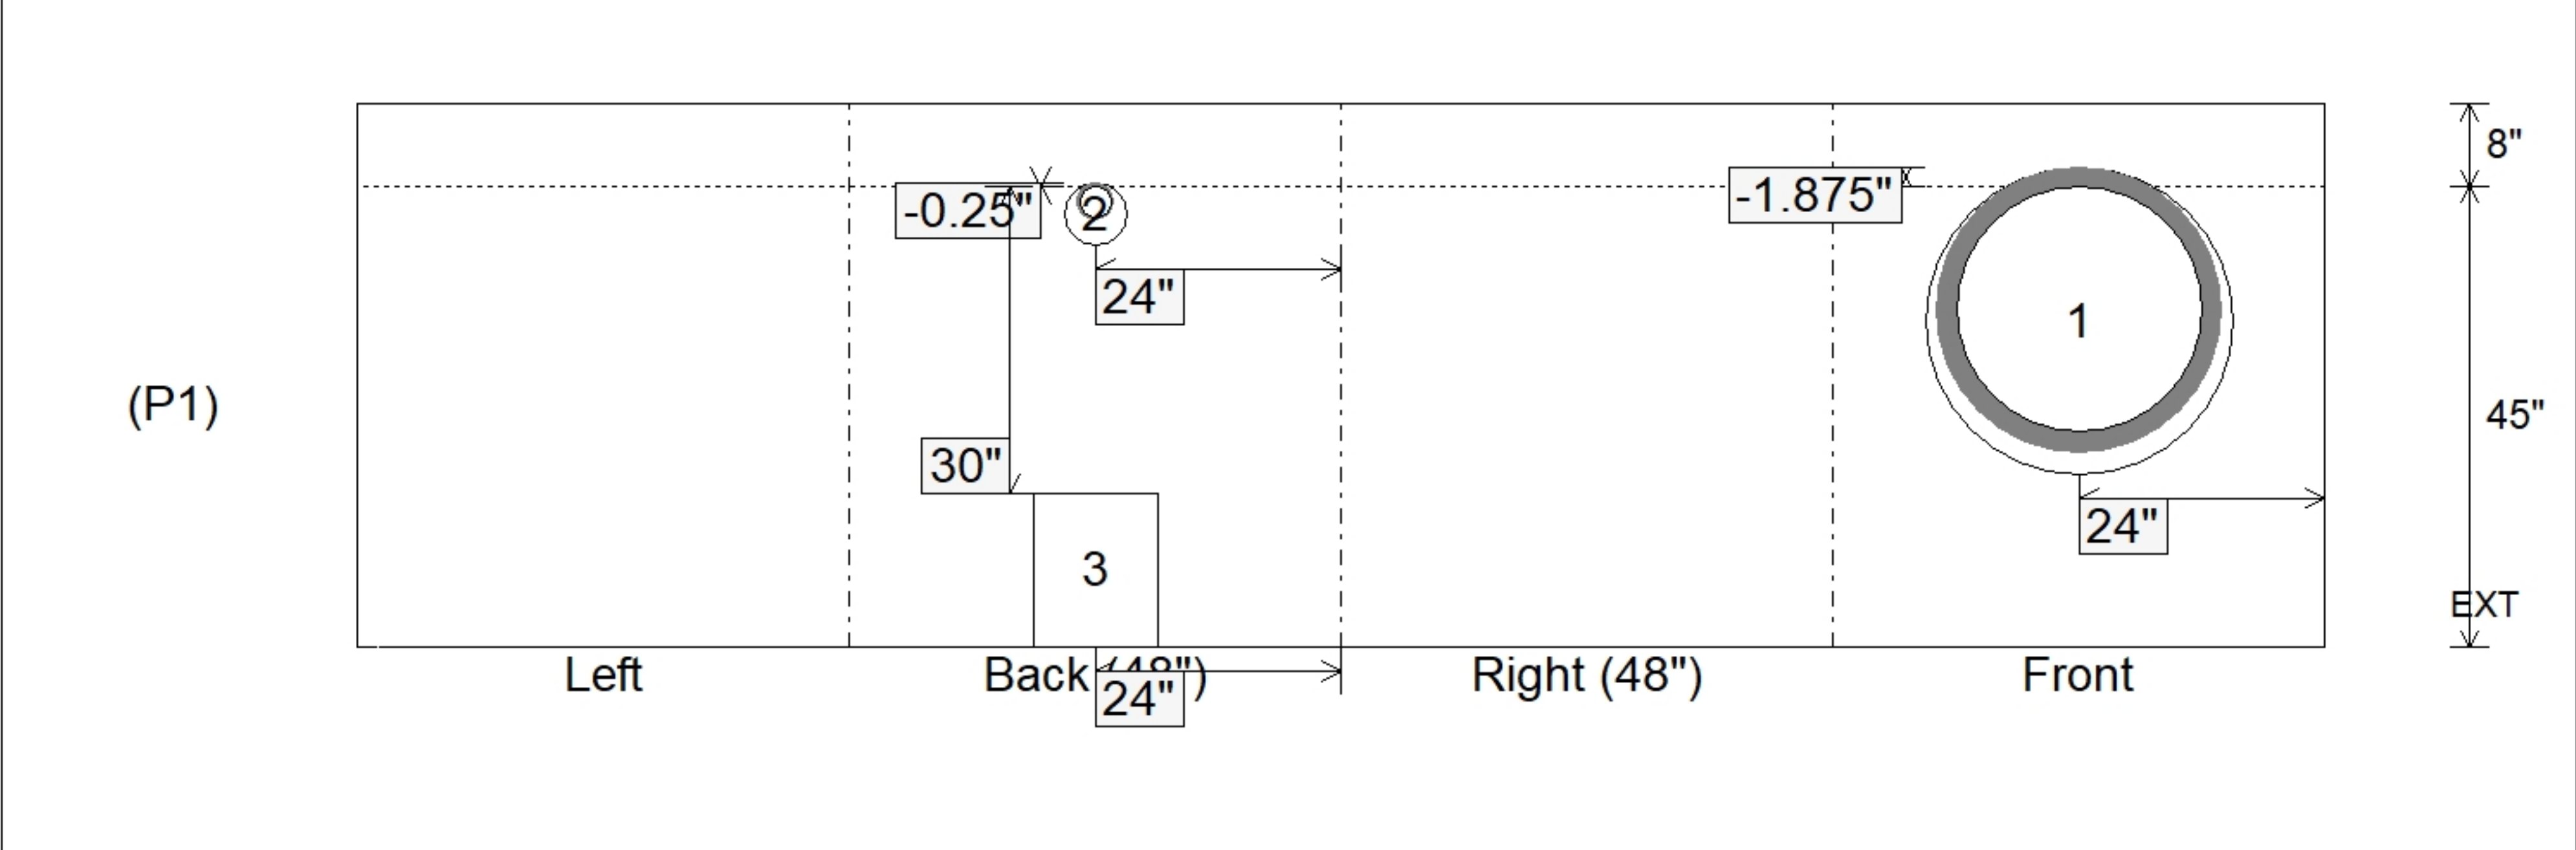

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 45" Height (Ext): 53"	Weight (Net): 8902 lb Volume (Net): 2.27cu.yd
----------------------------------	-------------------------------	--	--	--