




Job Name: 25-2898 - Hunter's Ridge Ph.1 Job Location: Owensboro, KY Contractor: Ernie Davis & Sons Mechanical, Inc.					Plant: 100 5/29/2026 8:45:15 AM		Tech: Jared - A PC: A. Chambers				
Structure ID: AA-7											
P2		MH048RS48		MH RISER T/G							
P4) 24" x 36" - CASTING HEIGHT - 6" P3) 48" - MH FLAT TOP w/24"x36" Hole F/G - 12" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE T/n - 42" 2) 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 26 7) MH Step ML-10-TDS-NCR - 10"					0 lb 1300 lb 3353 lb 3798 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structures Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 115 DEGREES 5. HOE-525 FRAME, GRATE, & CURB HOOD SUPPLIED BY OTHERS				
Structure Total:					8451 lb						
Rim: 457.53' Rim to Invert: 9.03' Slack: 2.86" Sump: 2.5" Step Position: 115°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

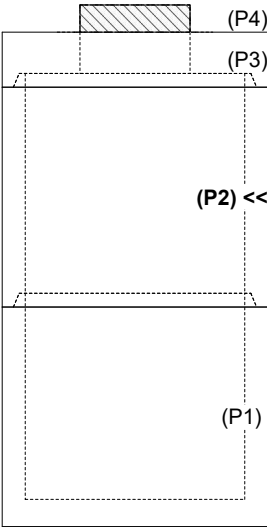

RIGHT-SIDE UP VIEW (int. dimensions)

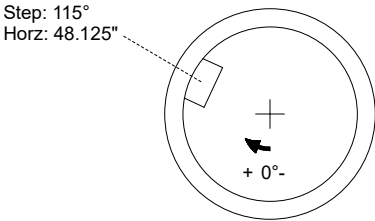

INSIDE WALL DIMENSIONS

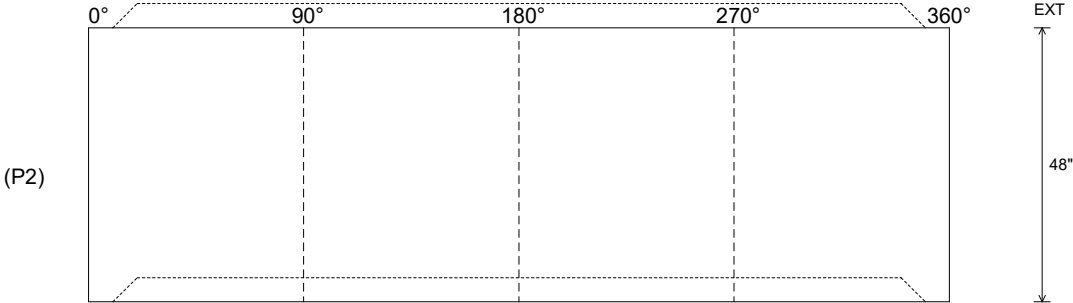

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 3353 lb Volume (Net): 0.86cu.yd
----------------------------------	------------------------------------	--	--	--