

Job Name: 25-2898 - Hunter's Ridge Ph.1
Job Location: Owensboro, KY
Contractor: Ernie Davis & Sons Mechanical, Inc.

Plant: 100

5/29/2026 8:45:54 AM

Tech: Jared - A

PC: A. Chambers



Structure ID: BA-2 - BB-1

P3 MH048LD12-24X36RECT

MH FLAT TOP w/24"x36" Hole F/G



- P4) 24" x 36" - CASTING HEIGHT - 6"
P3) 48" - MH FLAT TOP w/24"x36" Hole F/G - 12"
P2) 48" - MH RISER Custom Ht T/G - 47"
P1) 48" - MH BASE T/n - 42"
2) 48" - Conseal CS-102 1.00"
1) 24" x 36" - Conseal CS-102 1.00"
2) Hole - 34
1) Hole - 22
7) MH Step ML-10-TDS-NCR - 10"

Structure Total:

0 lb
1300 lb
3119 lb
3434 lb
0 lb
0 lb
0 lb
0 lb
0 lb
7853 lb

Structures Notes:

1. PER ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: #4 BAR @ 10" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. HOE-525 FRAME, GRATE, & CURB HOOD SUPPLIED BY OTHERS
5. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING
6. TOP SURFACE TO RECEIVE FLOATED FINISH

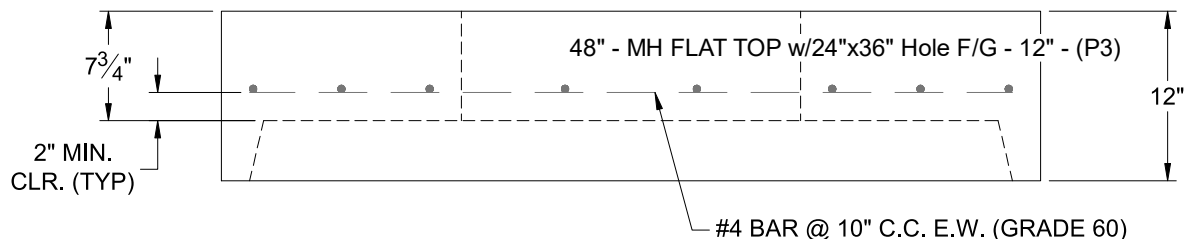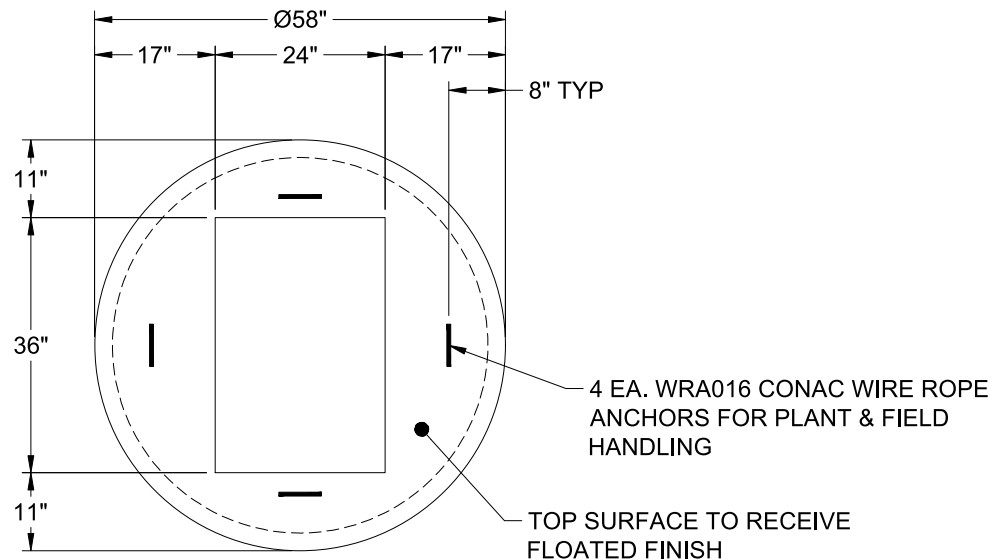

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1300 lb
Volume (Net): 0.46cu.yd