



PRINT IN COLOR FOR ADDITIONAL CLARITY

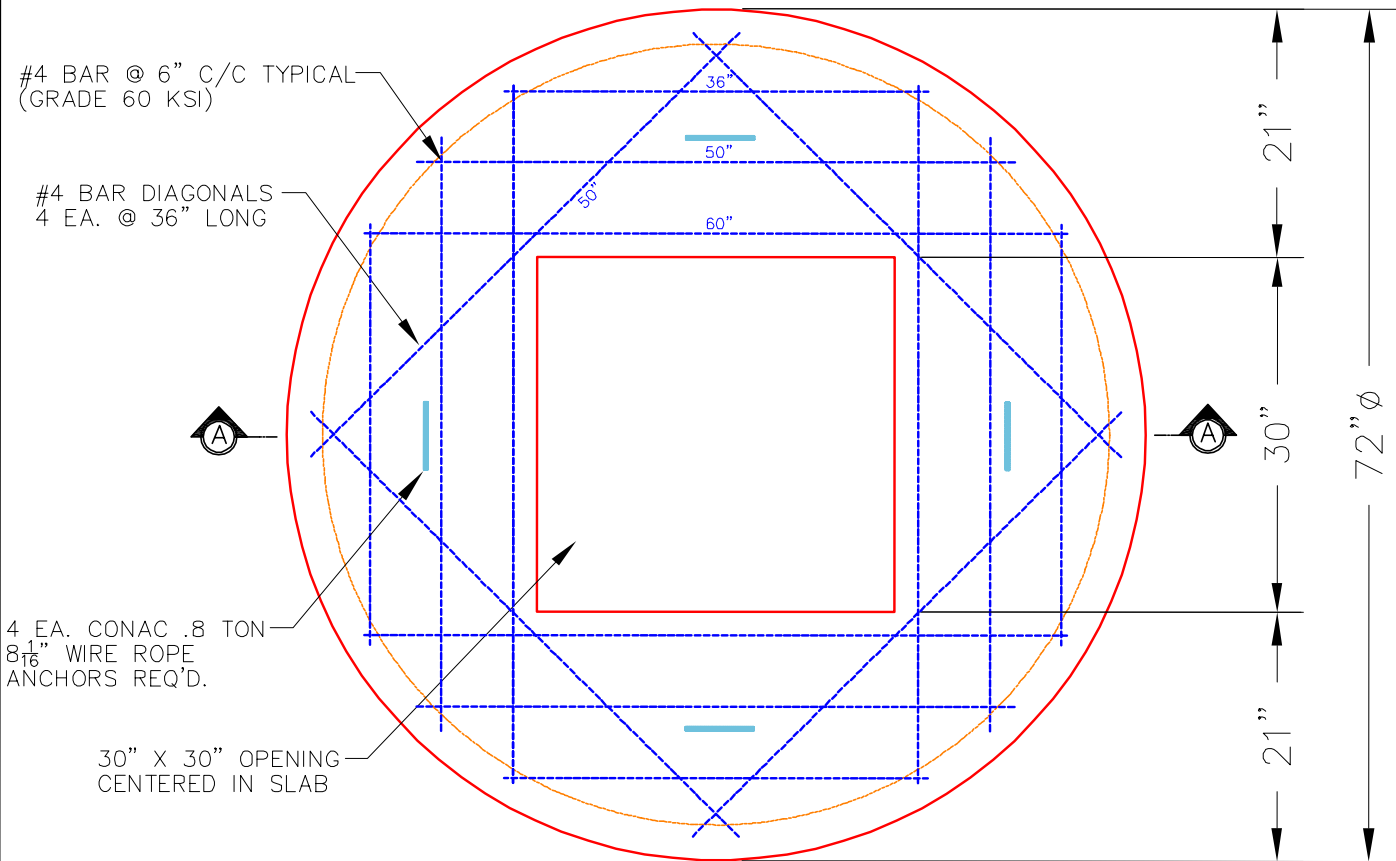

PLAN VIEW

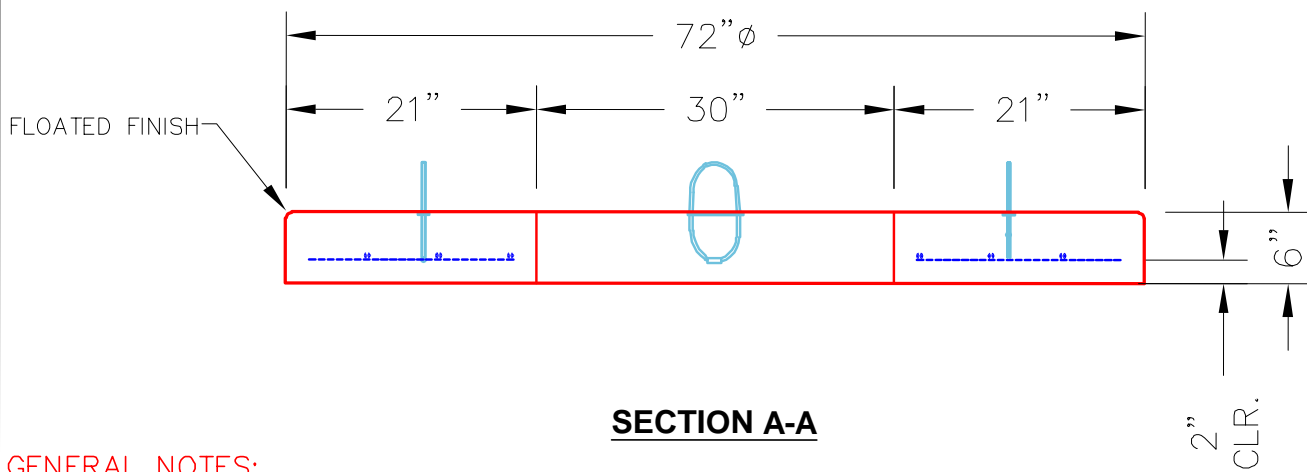

SECTION A-A

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,500 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 6" C/C (GRADE 60).
4. 4 EA. .8 TON CONAC WIRE ROPE ANCHORS FOR HANDLING.

<p>PRODUCTION WORK ORDER</p>		<p>PRODUCT I.D.: MH060LDS6-30X30</p>	<p>DESCRIPTION: 60" ϕ X 13" MANHOLE TOP SLAB W/30"X30"</p>
	<p>QUALITY CONTROL CHECKLIST</p> <p><input type="checkbox"/> ALL DIMENSIONS CORRECT.</p> <p><input type="checkbox"/> WIRE LIFT LOOPS INSTALLED.</p> <p><input type="checkbox"/> HOLE LOCATION CORRECT.</p> <p><input type="checkbox"/> REINFORCING CORRECT.</p> <p><input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM.</p> <p><input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED.</p> <p><input type="checkbox"/> GROOVE JOINT INSTALLED.</p>	<p>PRODUCT VIEW: RIGHT SIDE UP</p> <p>PLANT: BEAVER DAM, KY.</p> <p>WEIGHT: 1,600 LBS.</p> <p>TOP SECTION JOINT: N/A</p> <p>BOTTOM SECTION JOINT: GROOVE</p> <p>QC CHECK INITIALS:</p>	<p>CUSTOMER: LAGCO INC</p> <p>PROJECT: GOODWILL INDUSTRIES OF KENTUCKY</p> <p>STRUCTURE I.D.: DBI 2</p> <p>JOB NUMBER : 25-3021</p> <p>PC: J.H. ROSS, PE</p> <p>DATE: 10/17/25</p>
	<p>DRAWING: C. RUSS</p>		<p>SCALE: NTS</p>
	<p>PG. 1 of 1</p>		