


Floor (Bot): -0.5'
Overall Height: 7.167'
Slack: 0"

P3) 36" x 36" - HATCH (CAST FLUSH) - 3"	100 lb
P2) 72" x 96" - BX FLAT TOP 6"W w/36"x36" HATCH - 8"	5220 lb
P1) 72" x 96" - BOX BASE 6inW, 6inF, Variable Ht - 72"	17504 lb
1) HATCH (Alum.) - HALLIDAY W1S 36"x36"	78 lb
1) SECONDARY POUR - WALLS	0 lb
1) 72" x 96" - Conseal CS-102 1.00" (Double)	0 lb
1) 36" x 36" - Conseal CS-102 1.00" (Double)	0 lb
2) PSX - 12M NYLO	16 lb
4) MH Step ML-10-TDS-NCR - 10"	0 lb
Structure Total:	22918 lb

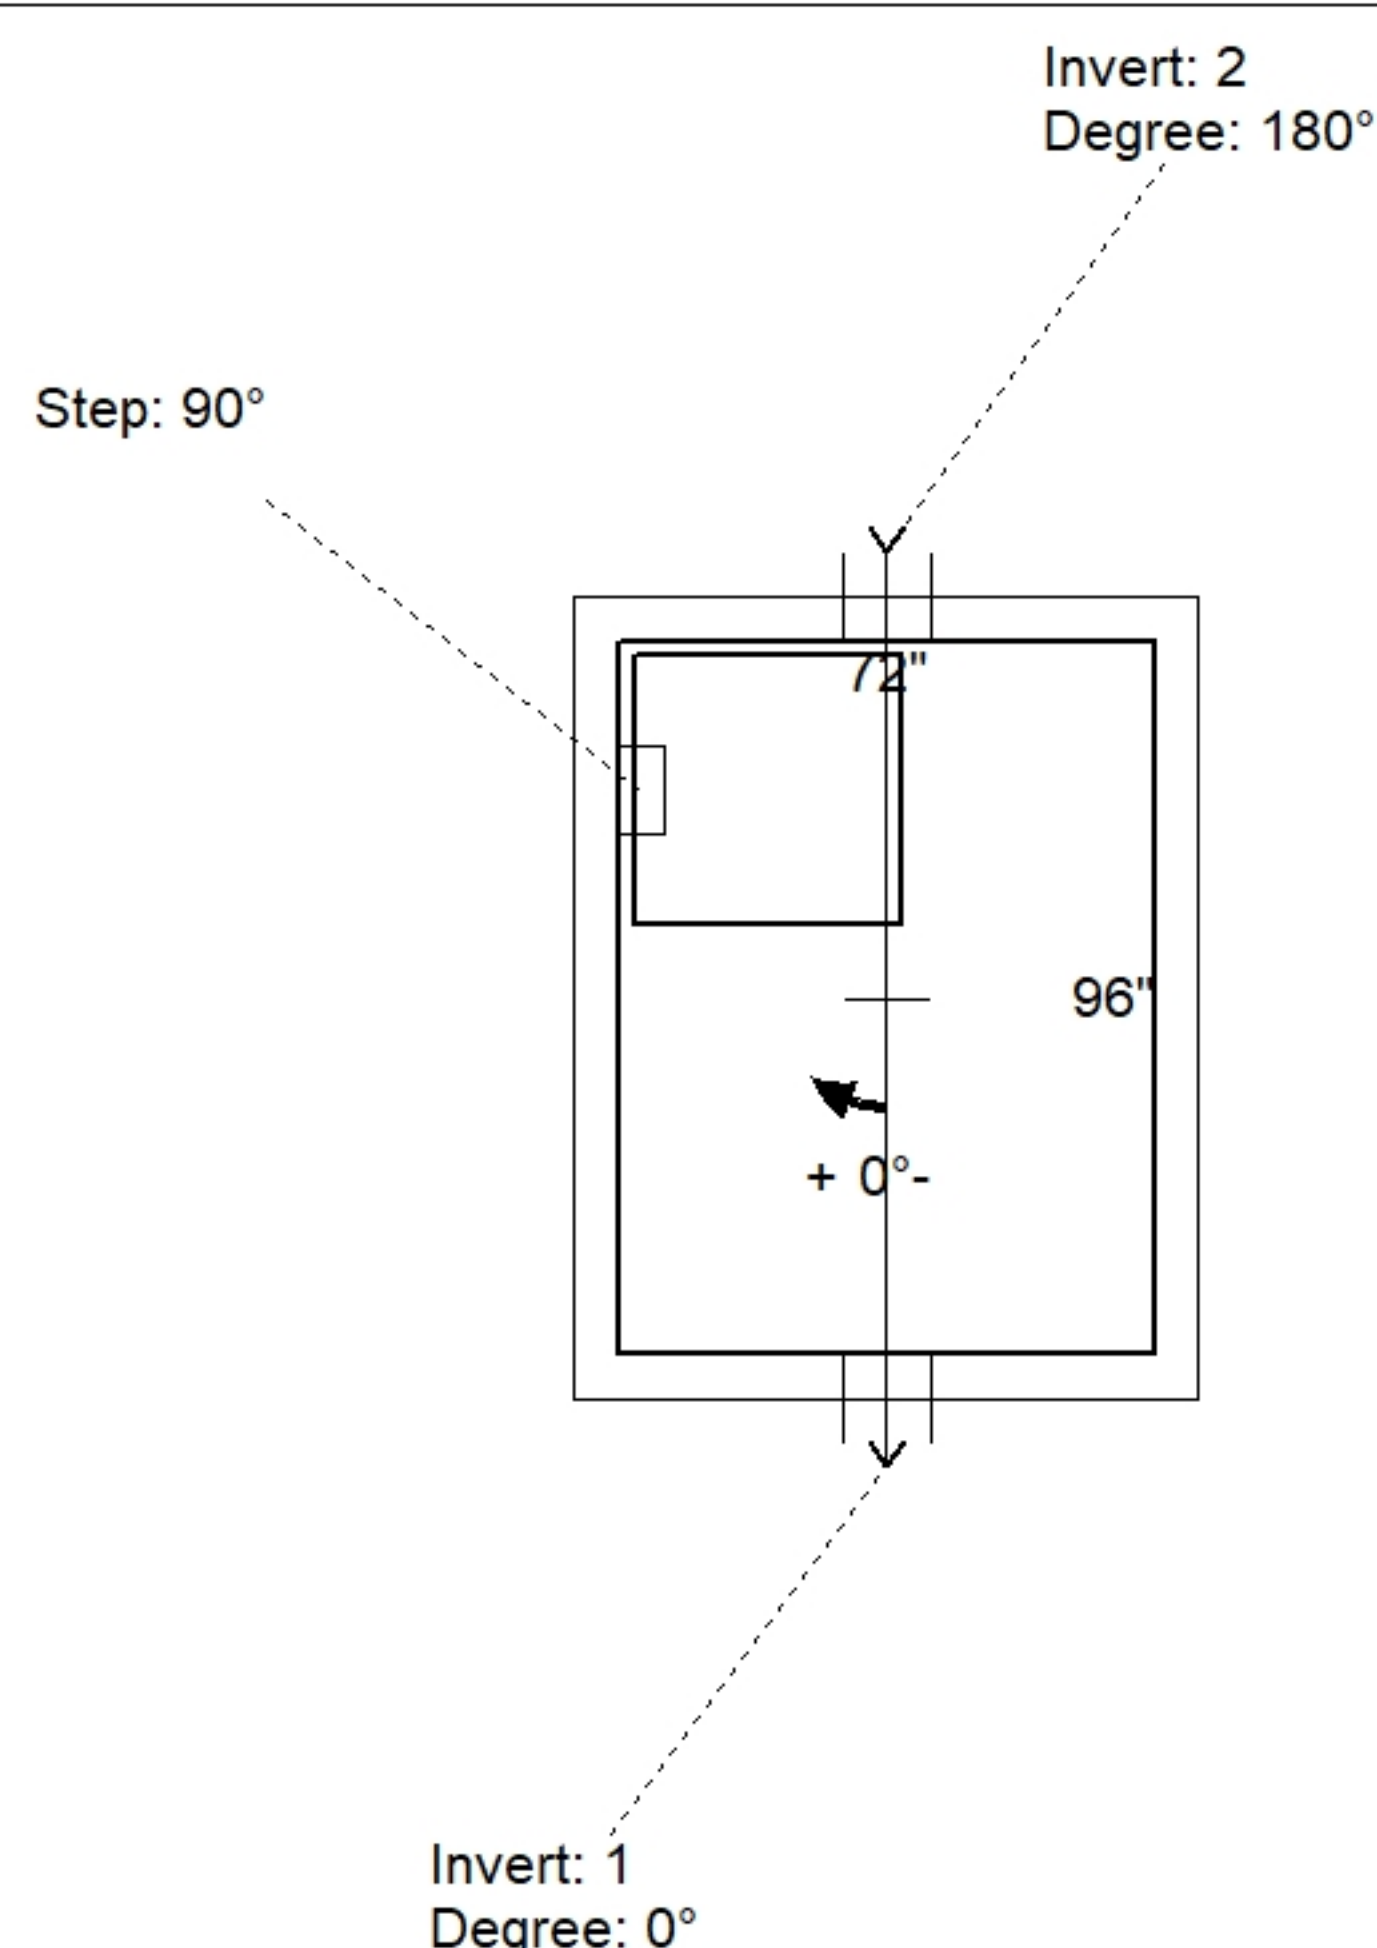

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	6.667'							
Reducer								
Invert 1	1.67'	0°	8" DI	9"	12"	PSX 12M NYLO	18.04"	P1
Invert 2	1.67'	180°	8" DI	9"	12"	PSX 12M NYLO	18.04"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

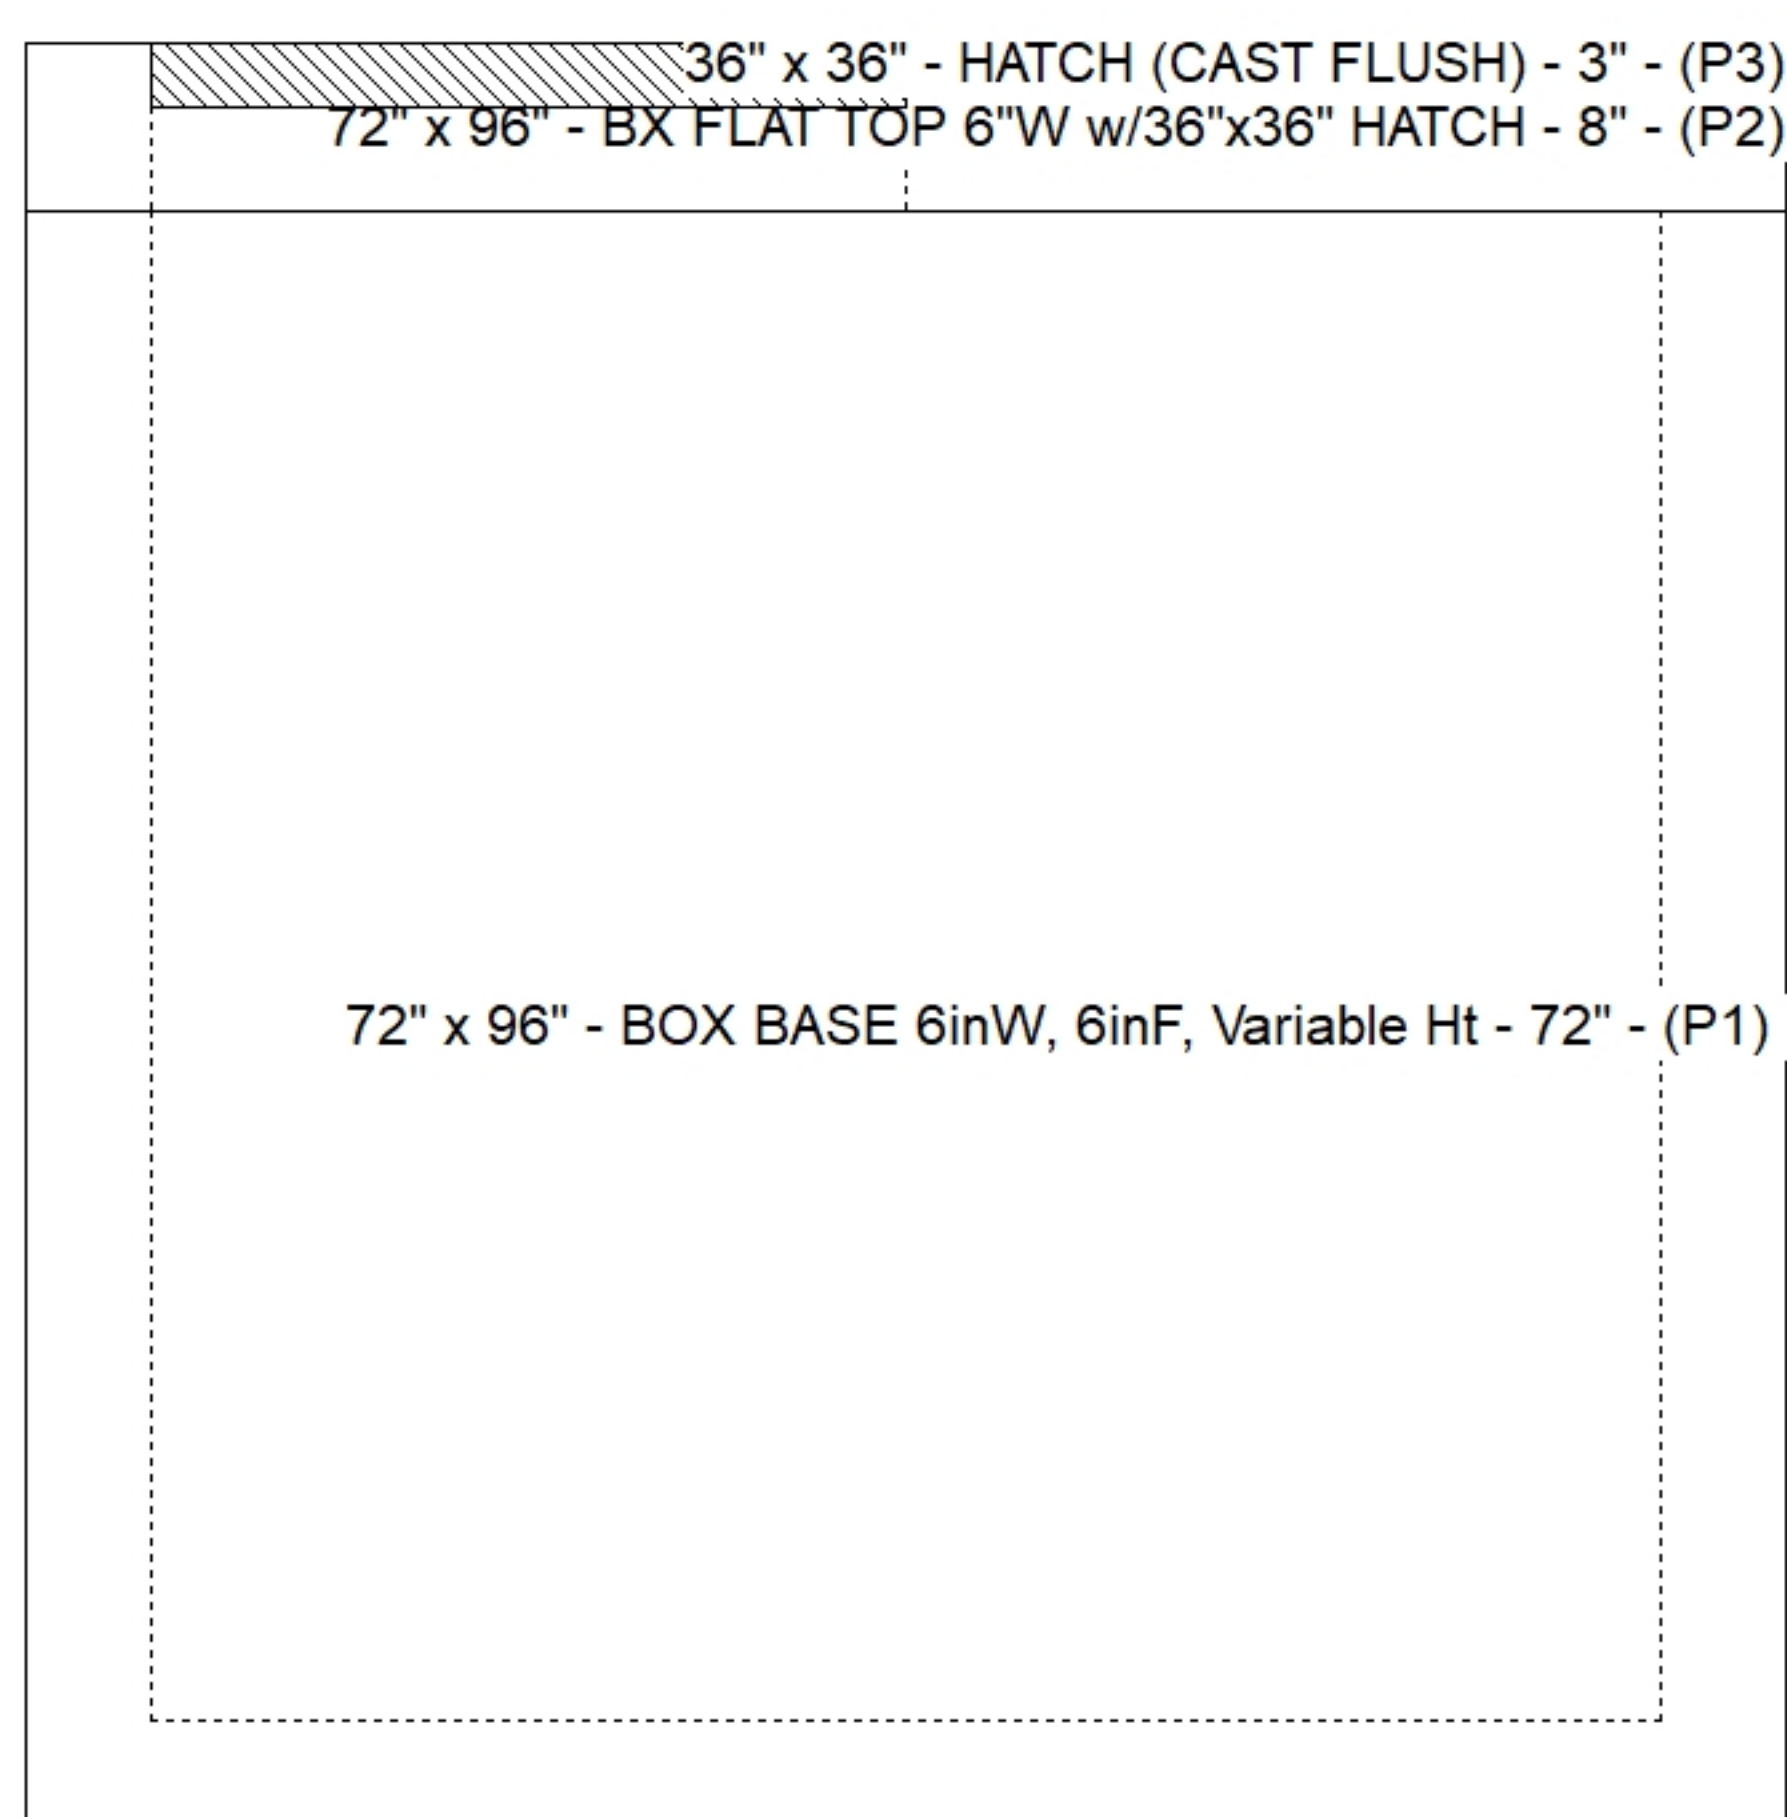


Diagram of a rectangular panel (P1) with dimensions and labels. The panel is divided into four sections by vertical dashed lines, labeled "Front", "Right", "Back", and "Left" from left to right. The total width is 72" and the total height is 6". Two circular markers, labeled ① and ②, are positioned on the "Front" and "Back" sections respectively. A dimension line indicates a distance of 18.04" from the left edge to the center of marker ①, and another dimension line indicates a distance of 18.04" from the right edge to the center of marker ②. The label (P1) is located to the left of the panel.

SUBMITTAL
APPROVED BY: