


Floor (Bot): -0.5'
Overall Height: 7.167'
Slack: 0"

P3) 36" x 36" - HATCH (CAST FLUSH) - 3"	100 lb
P2) 72" x 96" - BX FLAT TOP 6"W w/36"x36" HATCH - 8"	5220 lb
P1) 72" x 96" - BOX BASE 6inW, 6inF, Variable Ht - 72"	17504 lb
1) HATCH (Alum.) - HALLIDAY W1S 36"x36"	78 lb
1) SECONDARY POUR - WALLS	0 lb
1) 72" x 96" - Conseal CS-102 1.00" (Double)	0 lb
1) 36" x 36" - Conseal CS-102 1.00" (Double)	0 lb
2) PSX - 12M NYLO	16 lb

Structure Total:	22918 lb

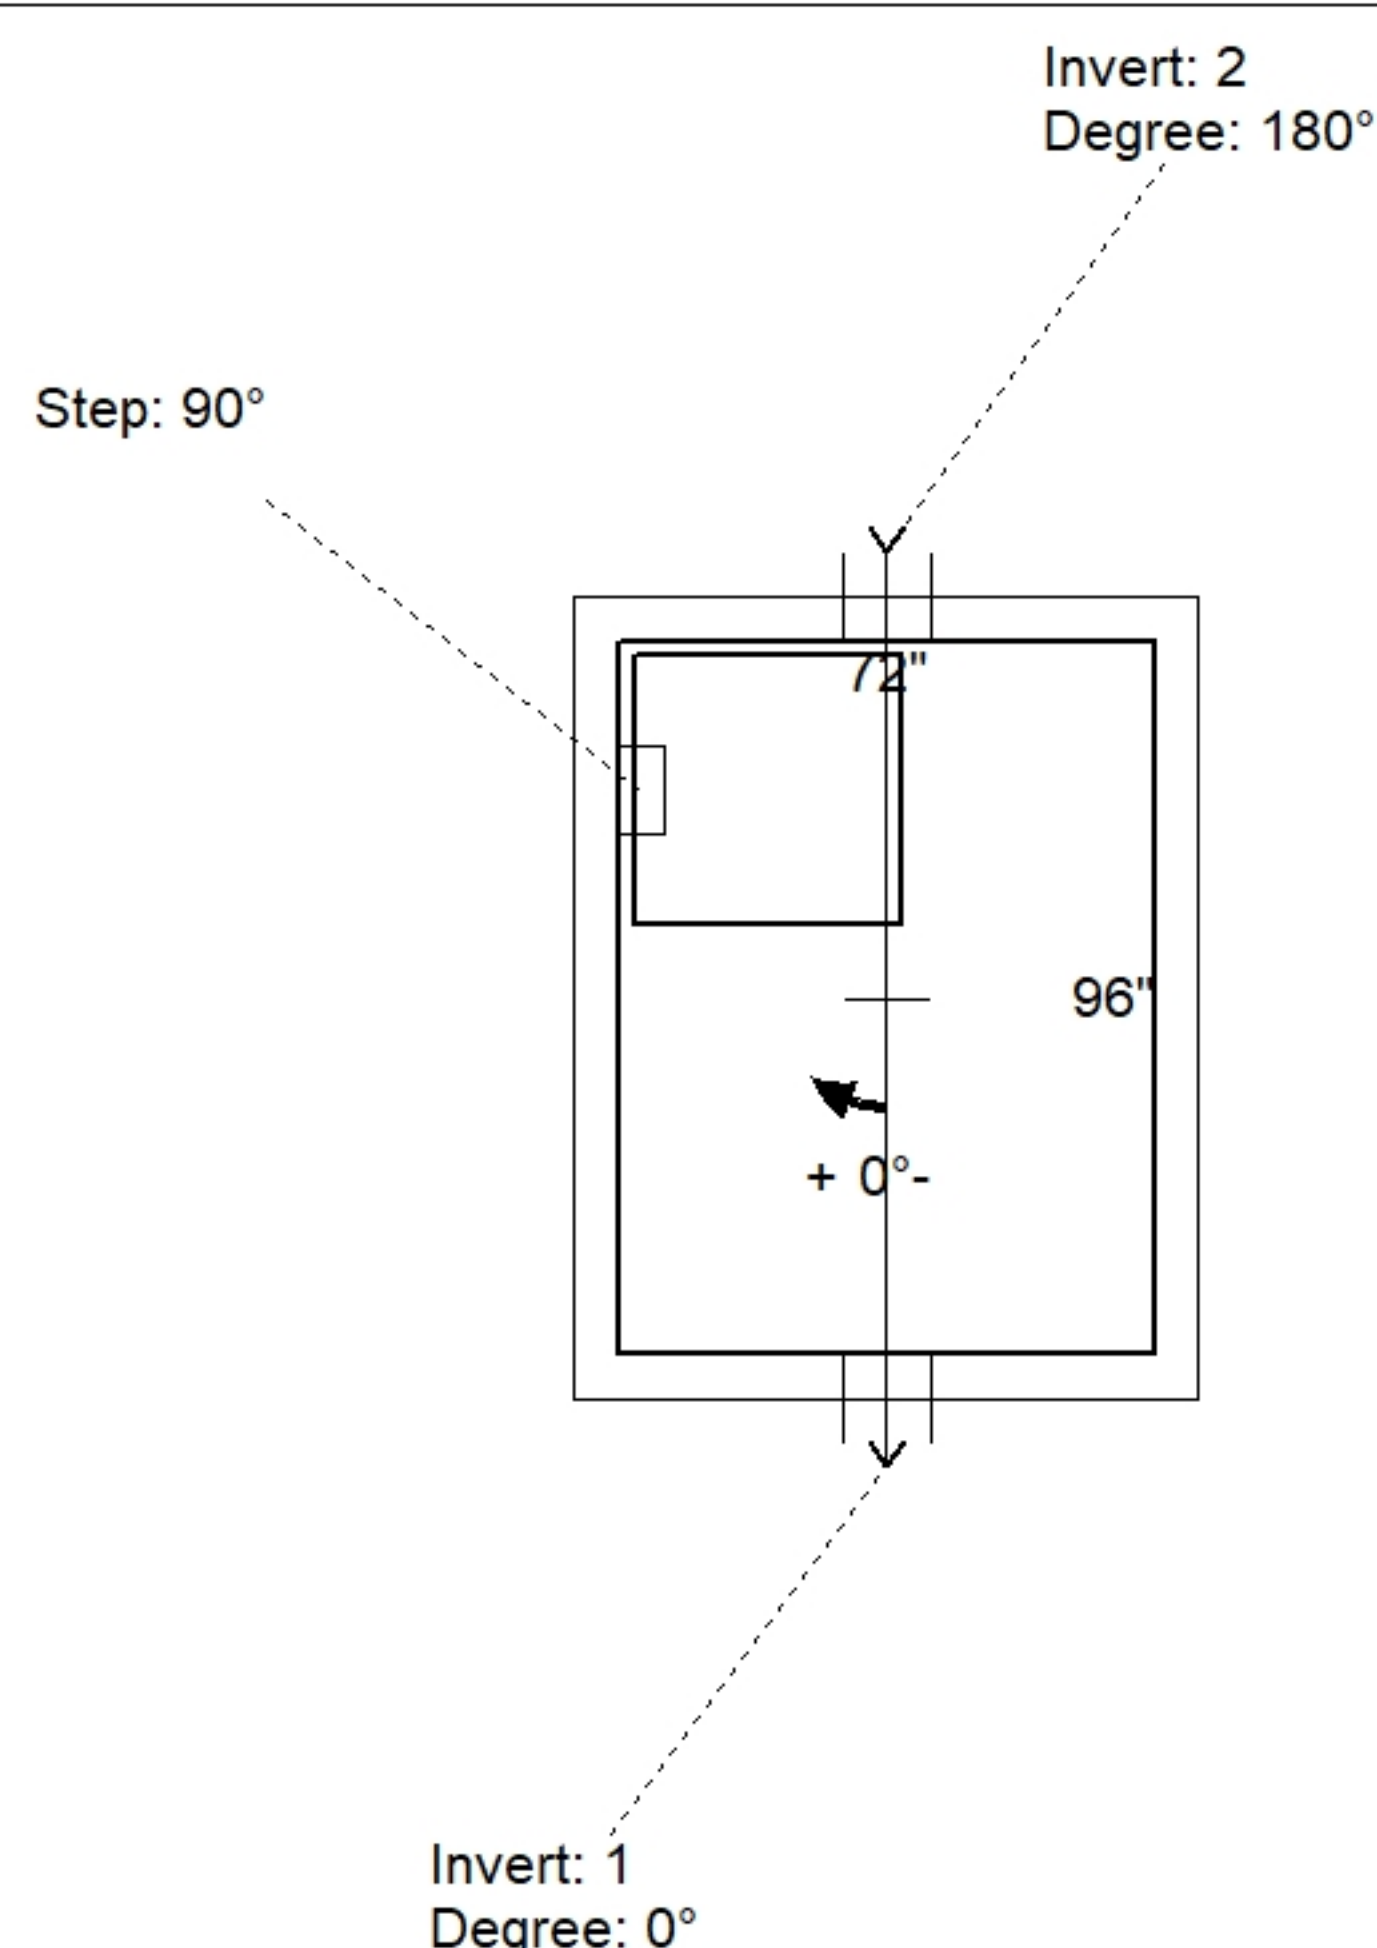

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	6.667'							
Reducer								
Invert 1	1.67'	0°	8" DI	9"	12"	PSX 12M NYLO	18.04"	P1
Invert 2	1.67'	180°	8" DI	9"	12"	PSX 12M NYLO	18.04"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

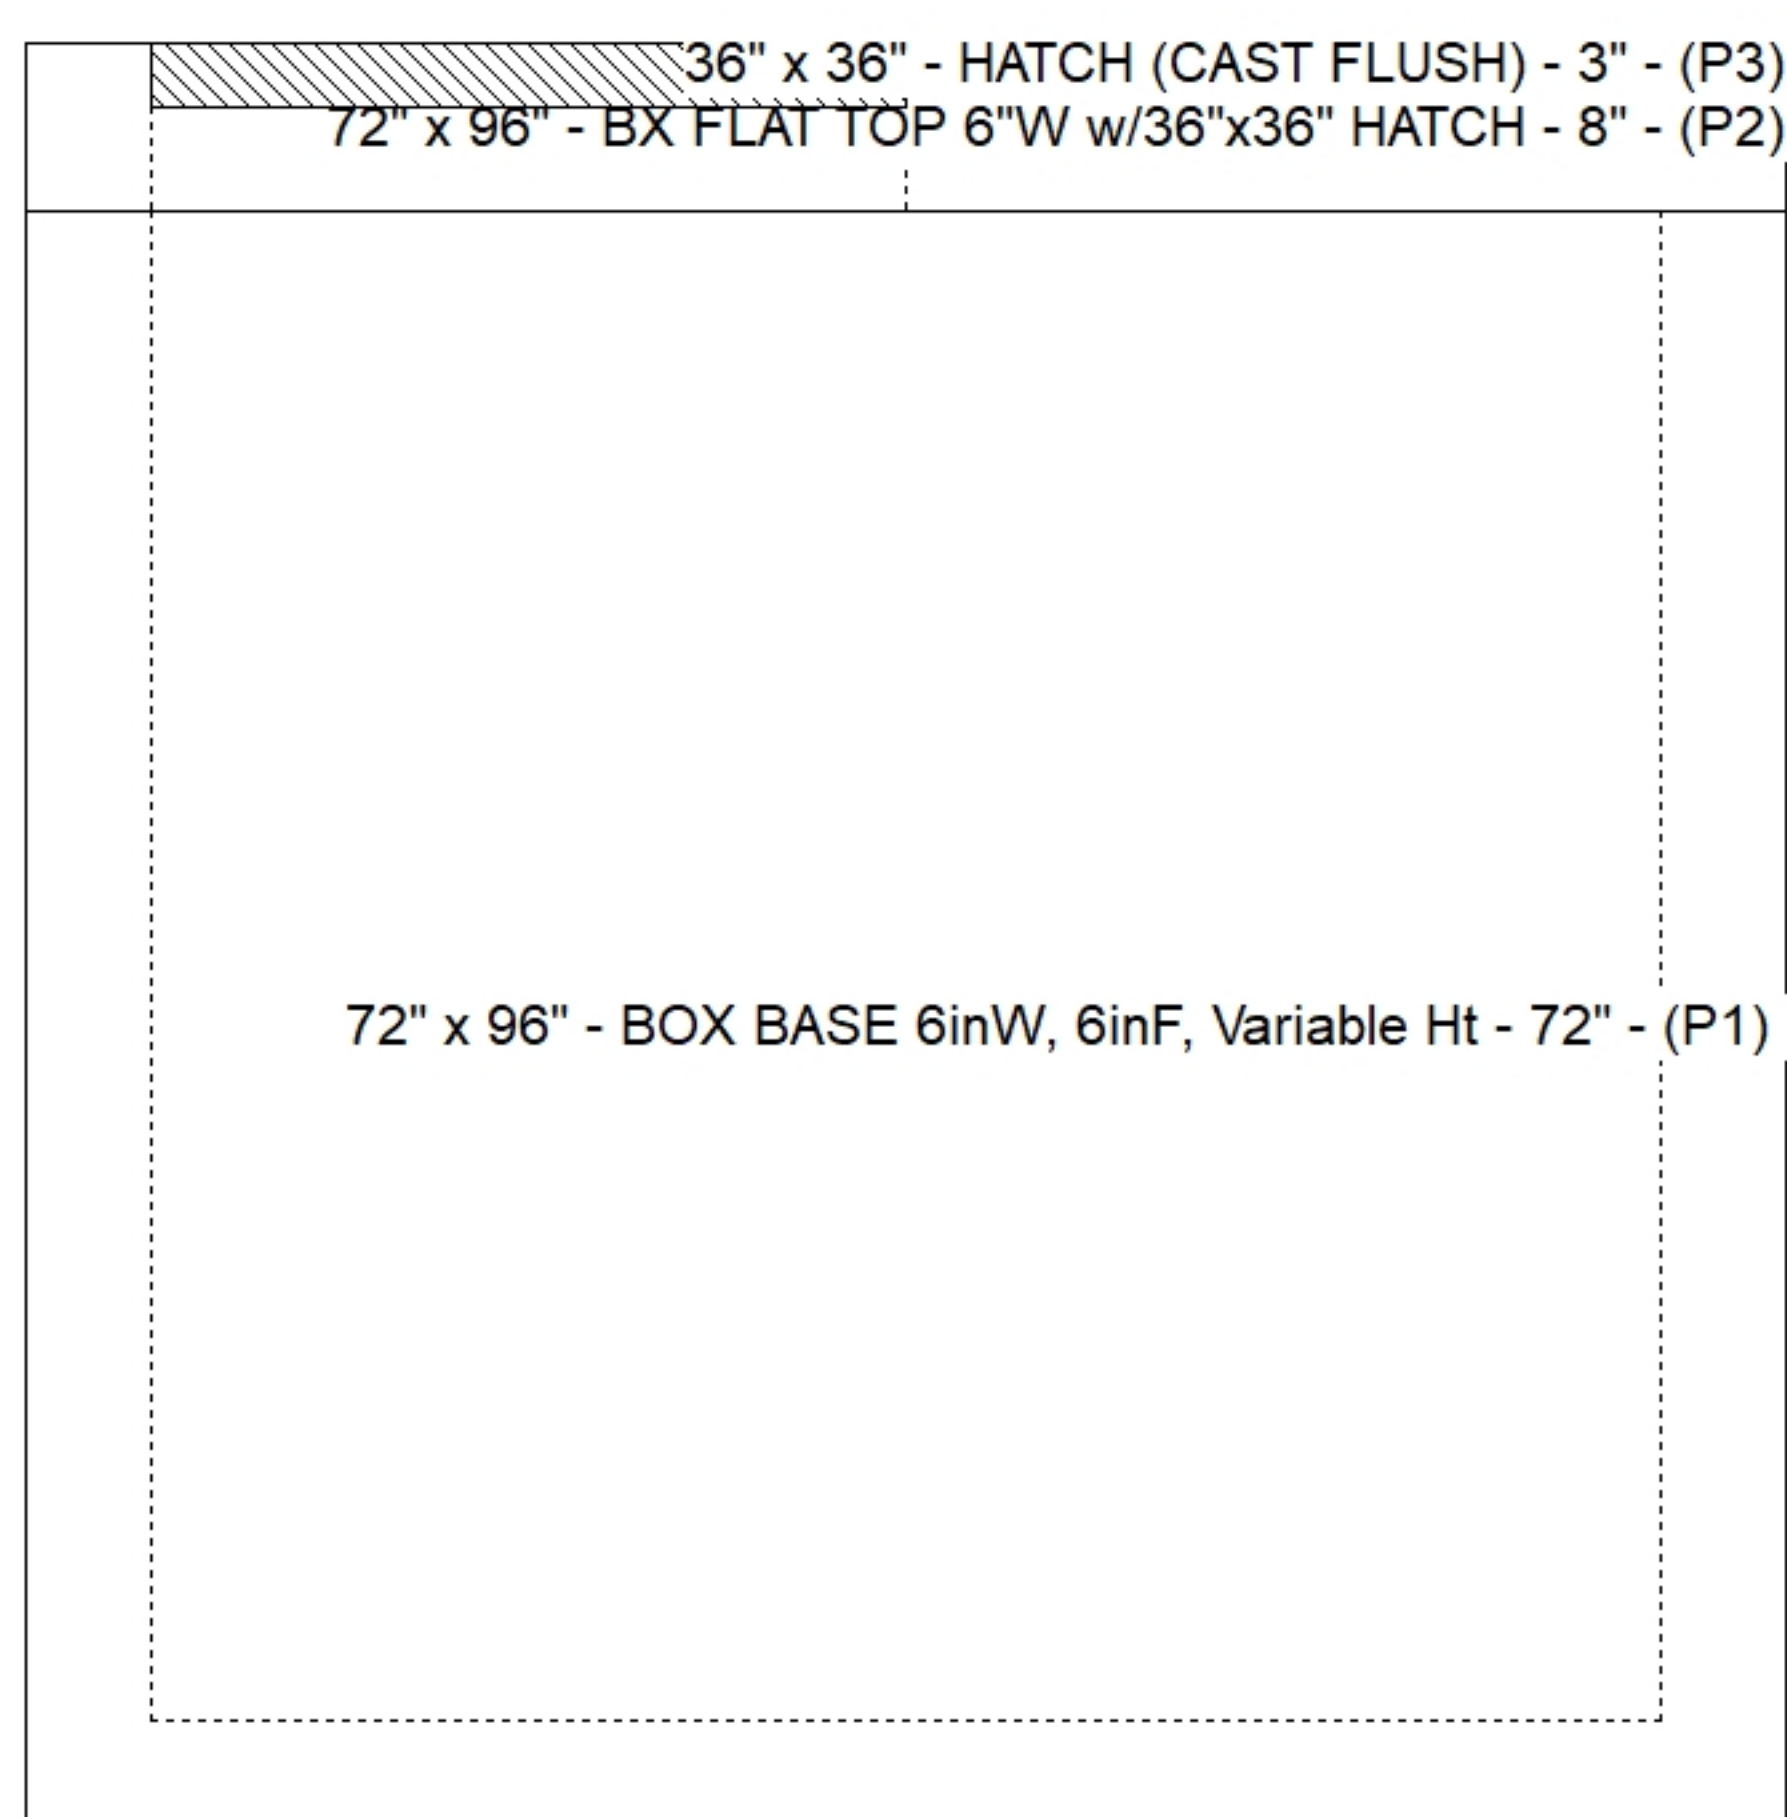


Diagram of a rectangular panel (P1) with dimensions and labels. The panel is divided into four sections by vertical dashed lines, labeled from left to right: Front, Right, Back, and Left. The total width is 72 inches, and the total height is 16 inches. Two circular markers, labeled ① and ②, are positioned on the panel. Marker ① is located in the Front section, and marker ② is located in the Back section. Both markers are positioned 18.04 inches from the left edge of their respective sections. The label (P1) is located to the left of the panel.

SUBMITTAL
APPROVED BY: