

Job Name: 25-3040B - Stonedale Farms Job Location: Nicholasville, KY Contractor: Weddle Enterprises, Inc		Plant: 100 7/23/2026 3:35:46 PM	Tech: Jared - F PC: T. Ryan	

Structure ID: MH21

P2 MH048CN30

ECC CONE w/ 24" HOLE F/G

P4) 24" - CASTING HEIGHT - 7"

P3) 24" - GRADE RING F/F - 3"

P2) 48" - ECC CONE w/ 24" HOLE F/G - 30"

P1) 48" - MH BASE T/n - 30"

1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212

1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)

1) 48" - MH INVERT CHANNEL - FULL HEIGHT

1) 48" - Conseal CS-102 1.00" (Double)

2) 24" - Conseal CS-102 1.00" (Double)

2) PSX - 16M NYLO

4) MH Step ML-10-TDS-NCR - 10"

0 lb

202 lb

2050 lb

3255 lb

0 lb

0 lb

1440 lb

0 lb

0 lb

16 lb

0 lb

Structure Notes: .

1. PER ASTM C478 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. CASTING SUPPLIED BY OTHERS (HOE MC-350 F/C SANITARY).


REINFORCING PER ASTM A615 (GRADE 60).


- CONE (As .12)

- RISER/WALLS (As .12)

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 6963 lb

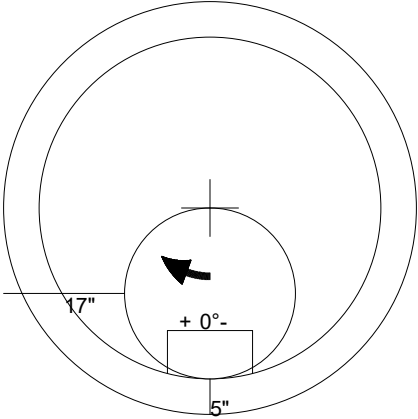



Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 30"

Weight (Net): 2050 lb
Volume (Net): 0.41cu.yd