




Job Name: 25-3040B - Stonedale Farms Job Location: Nicholasville, KY Contractor: Weddle Enterprises, Inc				Plant: 100 9/4/2026 12:10:20 PM		Tech: Jared - F PC: T. Ryan				
Structure ID: SPLITTER MANHOLE										
P2		MH096RSVFCDR		MH RISER Custom Ht, w/ConBlock-CDA Red T/G						
P4) 36" x 36" - HATCH (CAST FLUSH) - 3" P3) 96" - MH FLAT TOP w/36"x36" Hatch w/ConBlock-CDA Red F/G - 17" P2) 96" - MH RISER Custom Ht, w/ConBlock-CDA Red T/G - 89" P1) 96" - MH BASE EF Cust. Ht. 12"F (14"EF =142"OD) w/ConBlock-CDA Red T/n - 48" 1) HATCH (Alum.) - HALLIDAY W1S 36"x36" 2) JOINT WRAP - 12" WD x 096" MAC WRAP 1) ADMIXTURE CONBLOCK CDA RED 2) 96" - Conseal CS-102 1.00" (Double) 1) 36" x 36" - Conseal CS-102 1.00" (Double) 3) Kor-N-Seal2 - S206-20L 1) PSX - 12-06 NYLO NOTE: 4 EA. 8CA18 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING – INSTALLED AT 0, 90, 180 & 270, 30" FROM TOP OF WALLS				100 lb 9622 lb 22086 lb 27188 lb 78 lb 0 lb 0 lb 0 lb 0 lb 20 lb 8 lb ----- Structure Total: 59102 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. 4. HATCH BY ICAST (HALLIDAY W1S 36"X36"). 5. CONCRETE WEIR WALL & FLOW CHANNEL BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT) - RISER/WALLS (As .24) - FLOOR (As .47) #5 BARS AT 8" C.C.E.W. (DOUBLE MAT)				
Rim: 992.5'		Rim to Invert: 12.5'		Slack: -0.04"		Sump: 3.96"		Step Position:		
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4	989.5'	330°	328.25"	6" PVC SDR35	6.25"	PSX 12-06 NYLO	12"	12.031"	62"	0"
Invert 5										
Invert 6										
Invert 7										
Invert 8										



RIGHT-SIDE UP VIEW (int. dimensions)

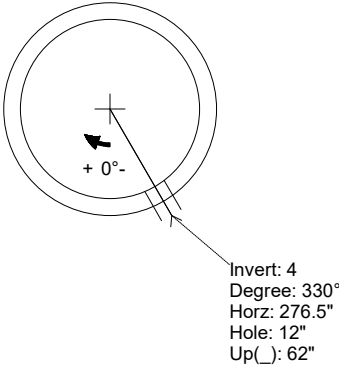

INSIDE WALL DIMENSIONS

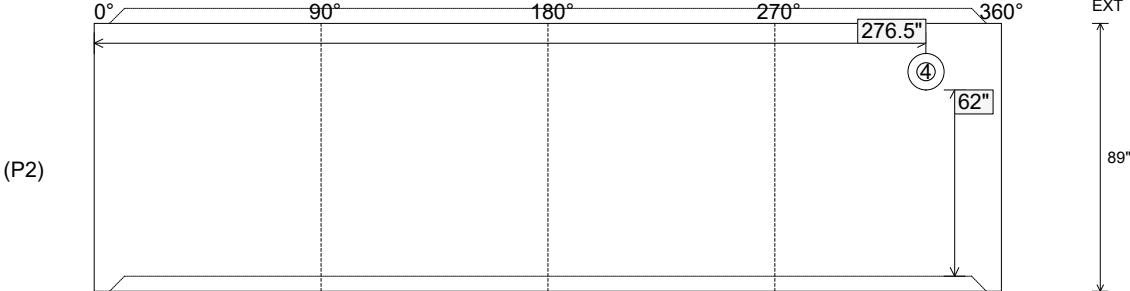

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 9"
Floor Height: 0"

Height (Int): 89"
Height (Ext): 89"

Weight (Net): 22086 lb
Volume (Net): 5.64cu.yd